

BG-4KCHA

**USB-C 4K Video Capture Box with Scaler,
HDMI 2.0 loopout, Audio & HDR10 to SDR Conversion**

User Manual







TABLE OF CONTENTS

Statement	4
Safety Precaution	4
Introduction	5
Features	5
Packing List	6
Specifications	6
Operation Controls and Functions	7
Connection Diagram	8
Video Streaming	9
Troubleshooting	17
USB Pin Definition	18
Tech Support	19
Warranty	19
Mission Statement	20
Copyright	20



Statement

Please read these instructions carefully before connecting, operating, or configuring this product. Please save this manual for future reference.

Safety Precaution

- To prevent damaging this product, avoid heavy pressure, strong vibration, or immersion during transportation, storage, and installation.
- The housing of this product is made of organic materials. Do not expose to any liquid, gas, or solids which may corrode the shell.
- Do not expose the product to rain or moisture.
- To prevent the risk of electric shock, do not open the case. Installation and maintenance should only be carried out by qualified technicians.
- Do not use the product beyond the specified temperature, humidity, or power supply specifications.
- This product does not contain parts that can be maintained or repaired by users. Damage caused by dismantling the product without authorization from BZBGear is not covered under the warranty policy.
- Installation and use of this product must strictly comply with local electrical safety standards.



Introduction

The BG-4KCHA is an advanced USB-C 4K video capture device with a scaler, HDMI 2.0 loopout, audio, and HDR10 to SDR conversion, designed for professional HDMI video signal capturing. It uses a USB 3.1 Type-C Gen 1 (USB 3.0) interface, allowing for high-speed transmission. Additionally, the HDMI input and loopout can support up to 4K2K@60, enabling users to connect the BG-4KCHA to a 4K@60 source and capture Ultra HD (4K2K@30) video. With the capability to capture and display uncompressed HDMI video, the BG-4KCHA provides more realistic color renditions. Moreover, the BG-4KCHA employs large volume image buffer technology to effectively avoid video tearing, while the high sampling rate and accuracy result in captured videos with high sharpness, rich details, and fewer color edges.

Furthermore, the HDR10 to SDR conversion allows Playstation and Xbox players to enjoy 4K2K@60 HDR games on a 4K TV through the loopout HDMI port and record real-time 4K2K@30/1080P@120 video streams with SDR quality through the USB 3.0 port simultaneously. With its versatility and features, the BG-4KCHA is a highly capable and professional-grade HDMI video capture device for demanding applications.

* PS5 & Xbox Series X also support 1080P120

Features

- HDMI video and audio streams over USB 3.1 Type-C Gen 1
- UVC1.0/1.1/1.5
- Video resolution up to 4K2K@30/1080P@120 (Video stream over USB-C)*
- HDMI input & loopout up to 4K2K@60
- Deinterlacer & scaler**
- Mic in mix with HDMI audio
- HDMI audio extraction
- HDR10 to SDR conversion***
- Play 4K@60 HDR on the HDMI out while streaming/capturing gameplay at 4K2K@30/1080P@120 with SDR colors
- Volume control knobs to adjust the MIC/Headphone volume
- Auto-detection of video format to ensure plug-play operations
- Supported operating systems: Windows 7/8.1/10/11, Mac, & Linux OS
- Compatible with most 3rd party software such as OBS Studio and AMCap
- Supports USB 3.1 Gen 1 (RGB/YUY2/NV12) (capture up to 4K2K@30) and USB 2.0 (YUY2/NV12) (capture up to 720P@30)
- Low Latency (3~4ms at 1080P)

Note: Please use the included USB 3.0 cable in the box to protect the device and avoid further compatible issues. Video resolution change may require users to restart software.

* ONLY NV12 supports 4K2K@30/1080P@120

** Scale-up supports up to 1080P@120

*** NOT supports HDR10 plus, HLG, and Dolby Vision to SDR conversion



Packing List

- 1x BG-4KCHA
- 1x USB 3.0 A to C Cable (host to device)
- 1x User Manual

Specifications

Model Name	BG-4KCHA	
Technical		
Role of usage	Video Capture Device	
Input Video bandwidth	600MHz	
Output bandwidth	Up to 350Mbps (USB-C)	
Video support(USB-C)	Up to 4K2K@30/1080P@120	
Video support(Loopout)	Up to 4K2K@60	
Audio Input	HDMI Embedded Audio & Stereo audio Input	
Audio Format	2CH 16 bit PCM	
Recording Video Format	RGB/YUY2/NV12 (USB3.1 Gen 1), YUY2/NV12 (USB2.0)	
ESD protection	Human body model – ±15kV [air-gap discharge] & ±8kV [contact discharge]	
PCB stack-up	4-layer board [impedance control – differential 100Ω; single 50Ω]	
Firmware update	Feasible via USB-C Port	
Input	1x HDMI+ 1x 3.5mm	
Output	1x USB-C + 1x HDMI + 1x 3.5mm	
HDMI connector	Type A [19-pin female]	
USB connector	USB 3.1 Type C (SuperSpeed USB)	
Software compatibility (not complete list)	OBS Studio (Windows, Linux, MAC), AMCap (Windows), Potplayer (Windows), VLC (OS X, Linux), XSplit Broadcast (Windows), Skype (Windows, OS X), Zoom (Windows), Hangout (Windows), TeamViewer (Windows)	
OS Support	Windows 7 /8.1 /10, Mac and Linux OS	
Mechanical		
Housing	Metal enclosure	
Dimensions [L x W x H]	Model	116 x 63 x 23mm [4.6" x 2.5" x 0.9"]
	Package	230 x 95 x 41mm [9" x 3.7" x 1.6"]
	Carton	500 x 477 x 241mm [1.4' x 1.5' x 9.4"]
Weight	286g[10 oz]	
Power supply	Via USB-C	
Power consumption	Watts [max]	
Operation temperature	0~40°C [32~104°F]	
Storage temperature	-20~60°C [-4~140°F]	
Relative humidity	20~90% RH [no condensation]	



Operation Controls and Functions


Front and Rear Panel



No.	Name	Function Description
1	STEREO AUDIO IN	Connect to an analog stereo audio source
2	STEREO AUDIO OUT	Extract audio from the HDMI input
3	LED INDICATOR	USB-C signal indicator LED [Red] Connected to a USB 2.0 port on the host [Blue] Connected to a USB 3.0 port on the host
4	LED INDICATOR	HDMI input signal indicator LED
5	STEREO AUDIO IN VOLUME KNOB	To adjust the stereo audio in sound level
6	STEREO AUDIO OUT VOLUME KNOB	To adjust the stereo audio out sound level
7	USB-C OUT	Connect to a USB host (PC, NB, MAC...)
8	HDMI OUT	Connect to a HDMI display
9	HDMI IN	Connect to a HDMI source



Connection Diagram

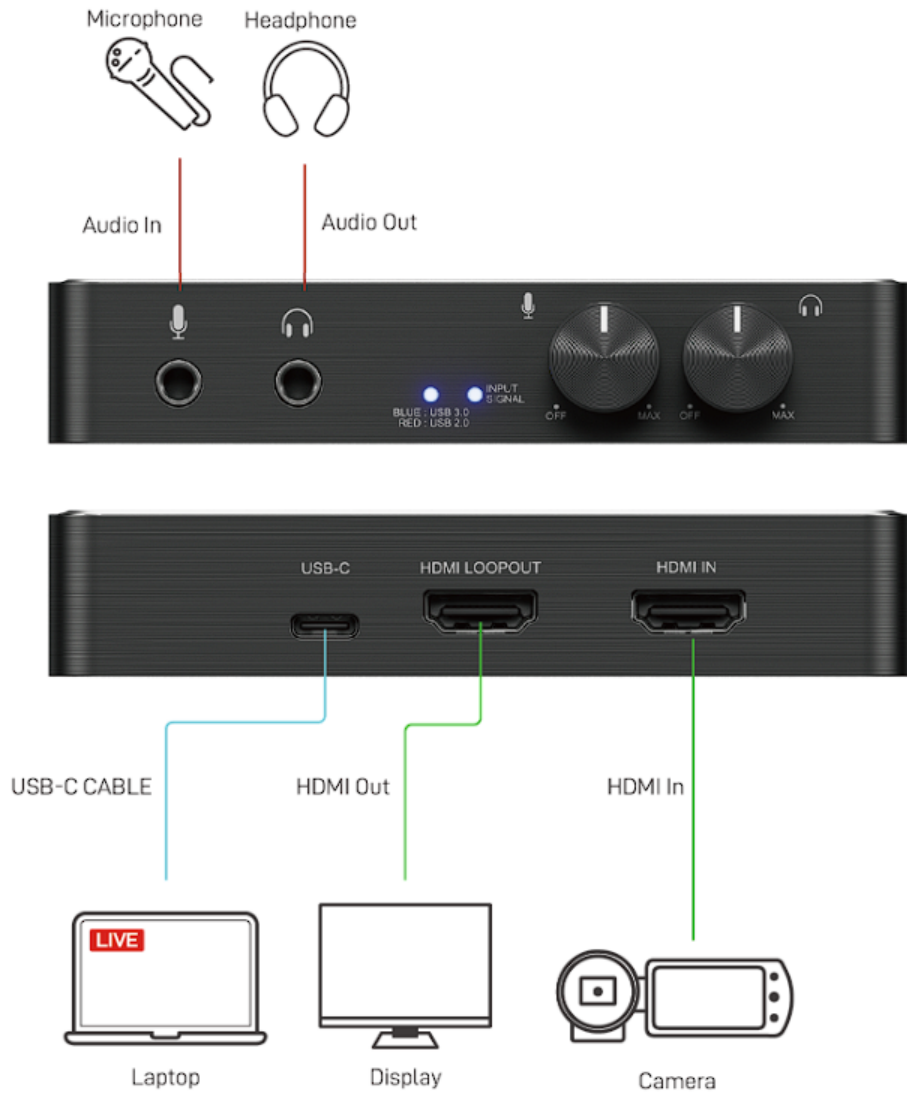




Video Streaming

Create a Video Streaming

Users can create video streams on their streaming service platform. The steps below show how to complete video streaming settings from Twitch and YouTube.


Twitch

1. Browse to the Twitch website (<https://www.twitch.tv/>) and log in. Next, select "**Creator Dashboard**" from your account drop-down menu at the top right of the screen.

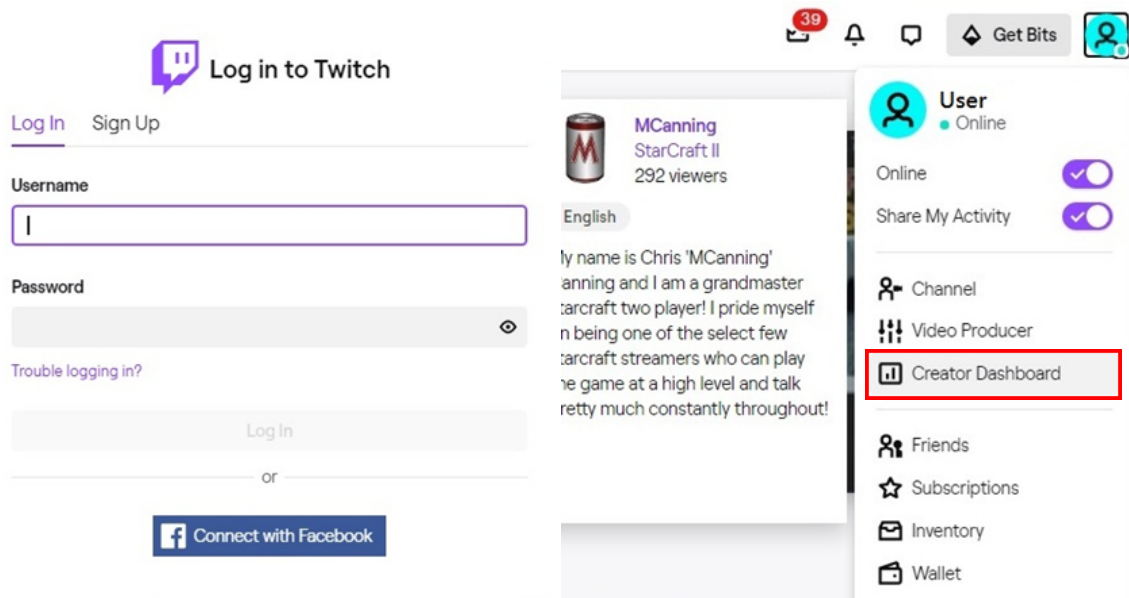


2. Find "**Preferences**" in the left menu, and click "**Channel**", then you will see "**Primary Steam key**" on the screen. Copy the "**Primary Steam key**" and paste it into the "**Stream Key**" field in the OBS, then click "**Start Streaming**" in the software.

* Please refer to steps 4-6 of the OBS software control program.

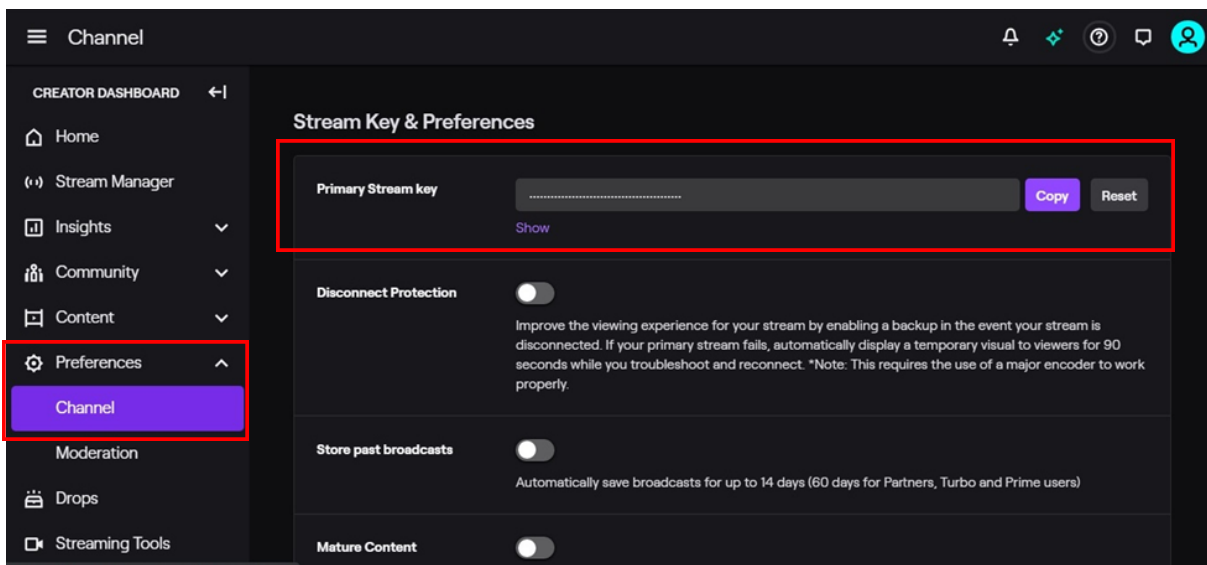




3. Go back to Twitch and select "**Channel**" from your account drop-down menu.

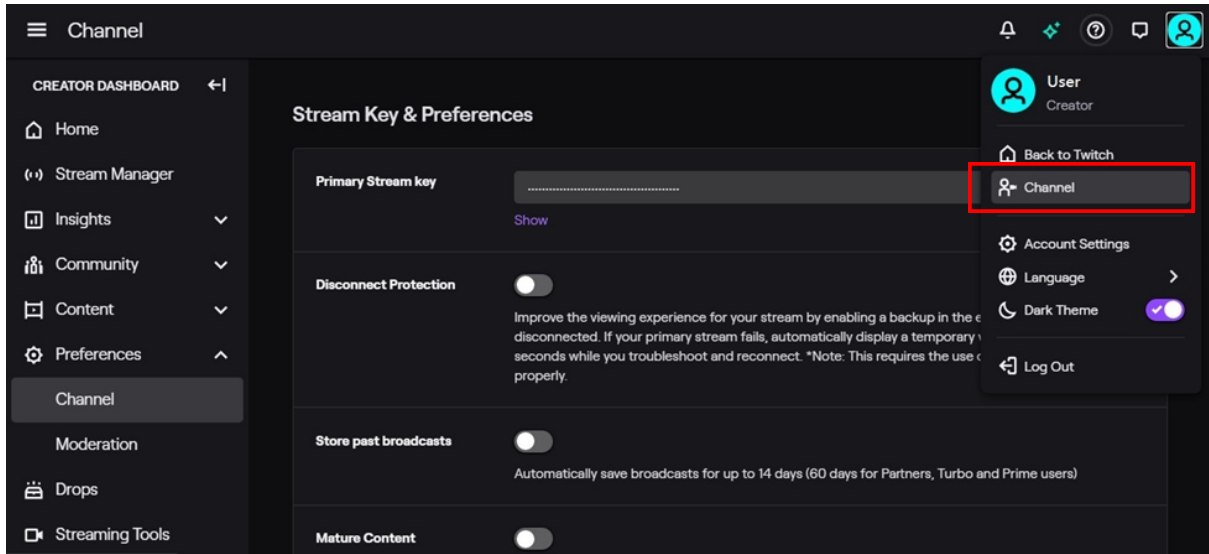

At this point, you will see the players live stream..

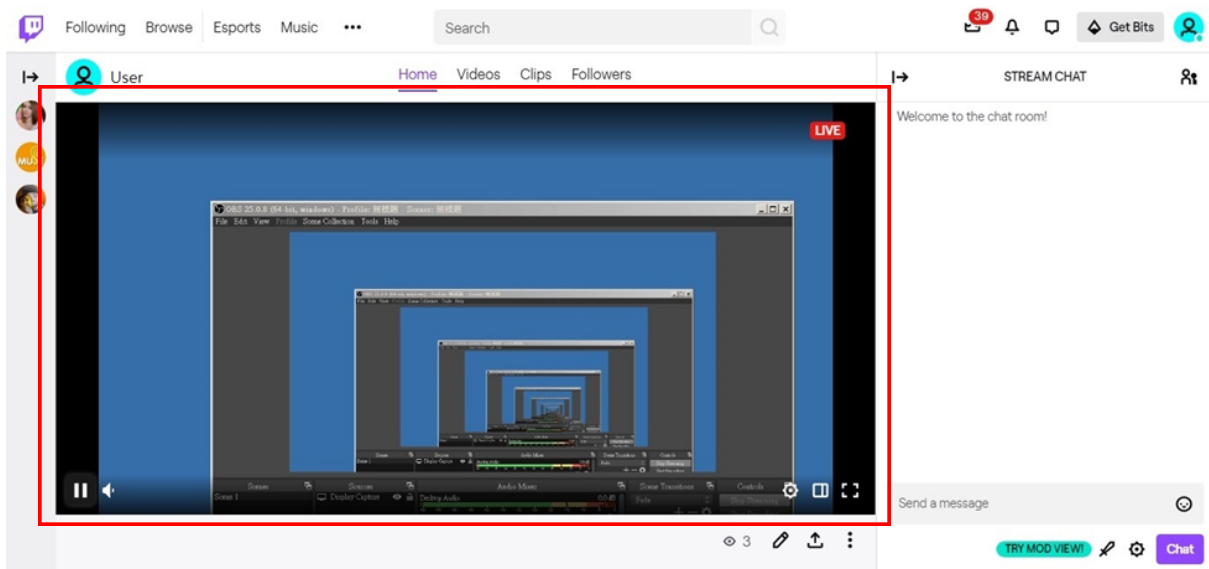





YouTube

1. Browse to the YouTube website (<https://www.youtube.com/>) and log in. Next, click "Go live" from the "Create" icon menu at the top right of the screen.

* If you are using YouTube for the first time to create a video stream, you need to wait 24 hours to enable the function.

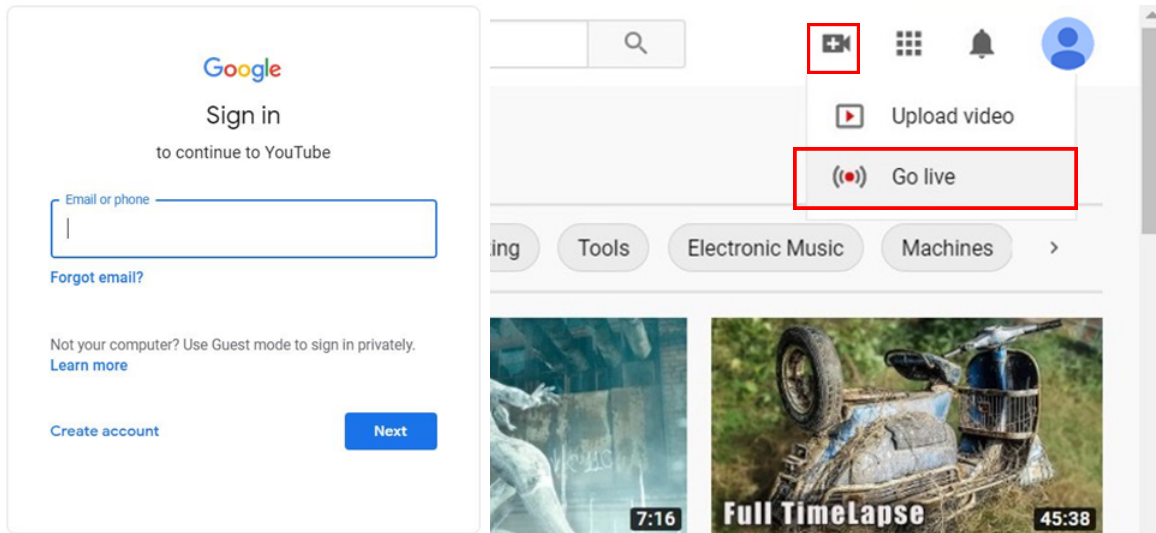


2. Click "Stream" in the left menu, and fill in the relevant information for the live video to create a new stream.

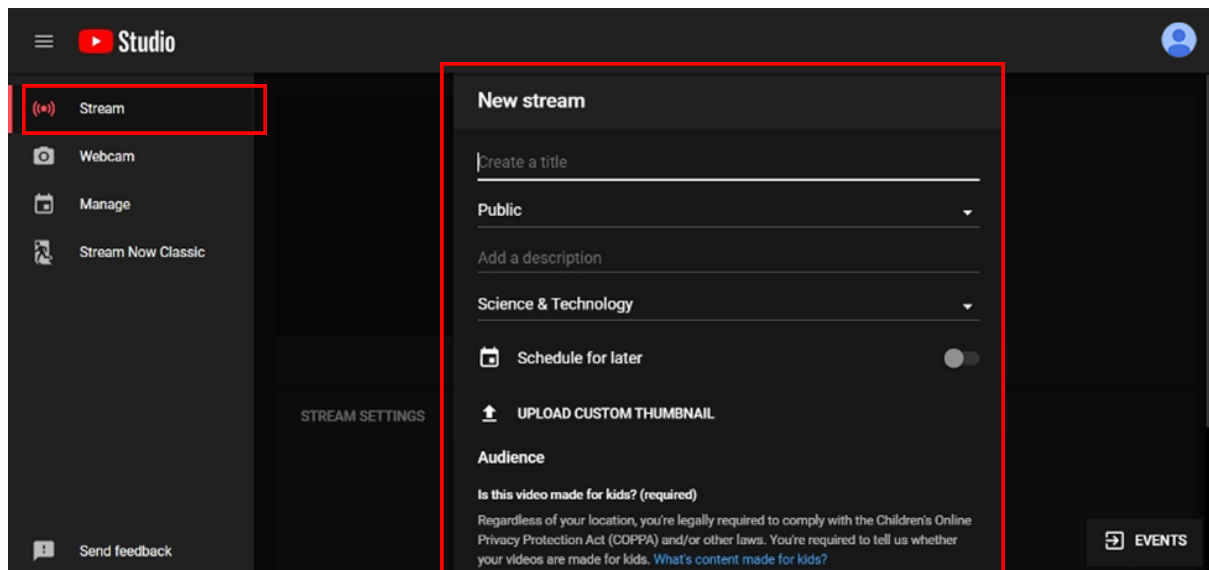




- You will see the **"Stream key"** from the **"STREAM SETTINGS"** below. Copy the **"Stream key"** and paste it into the **"Stream Key"** field in the OBS, then click **"Start Streaming"** in the software.

* Please refer to steps 4-6 of the OBS software control program.

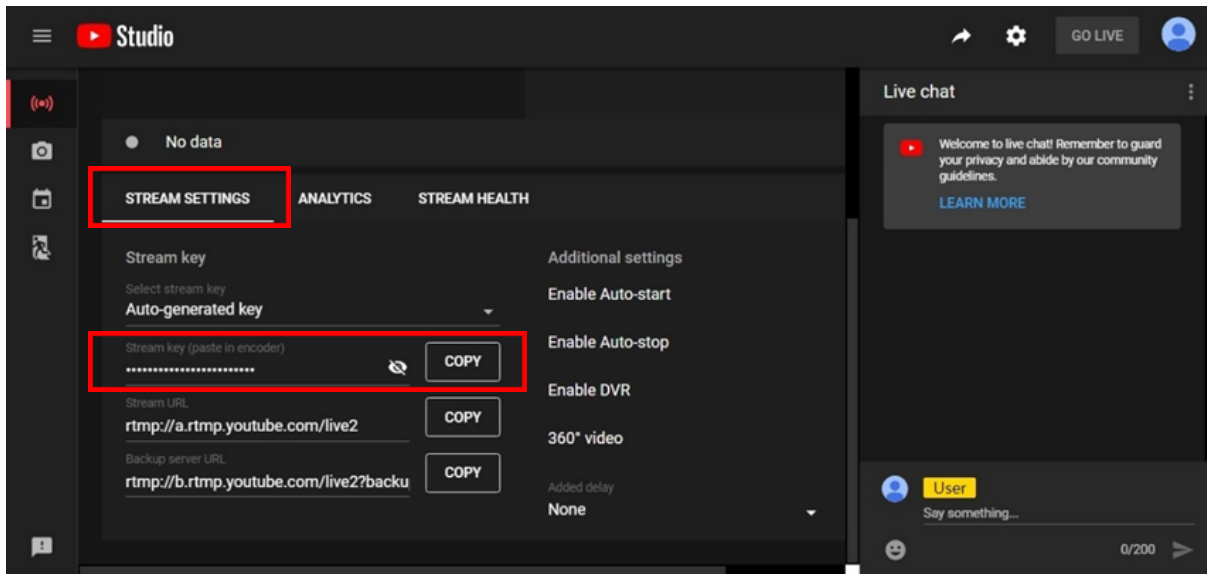


- Next, go back to YouTube, and then wait for 30-60 seconds, the player will display the live preview. At the same time, the **"GO LIVE"** button at the top right will turn blue, please press this button.

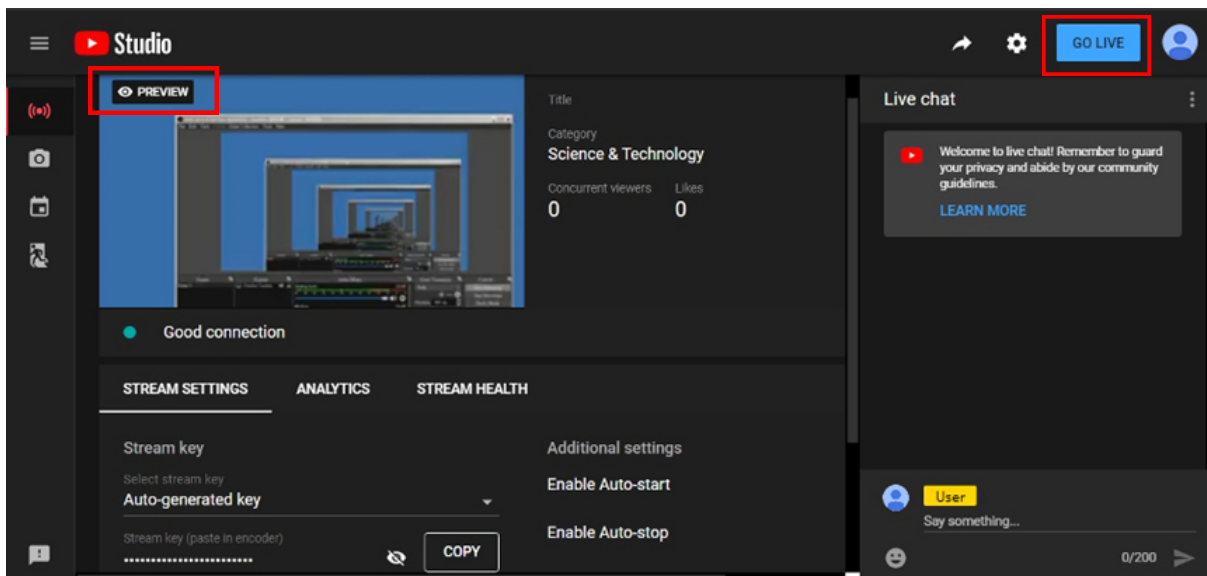



5. The player on YouTube will start live streaming.

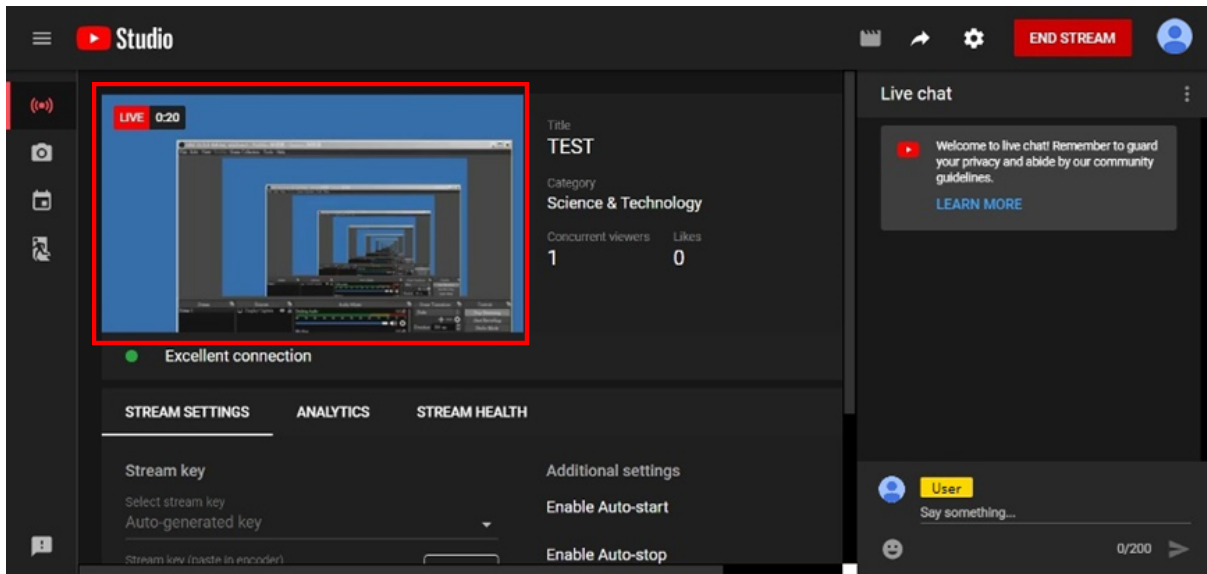

Stream and record videos with OBS

OBS is a popular USB capture freeware and has excellent compatibility. Please start with OBS if users are not familiar with USB capture devices.

Download the software


Browse to the download page of the OBS official website (<https://obsproject.com/download>), then select the suitable computer operating system and start downloading.






Start the software control program

After downloading the software, please open it and follow the below steps to complete the video streaming settings.

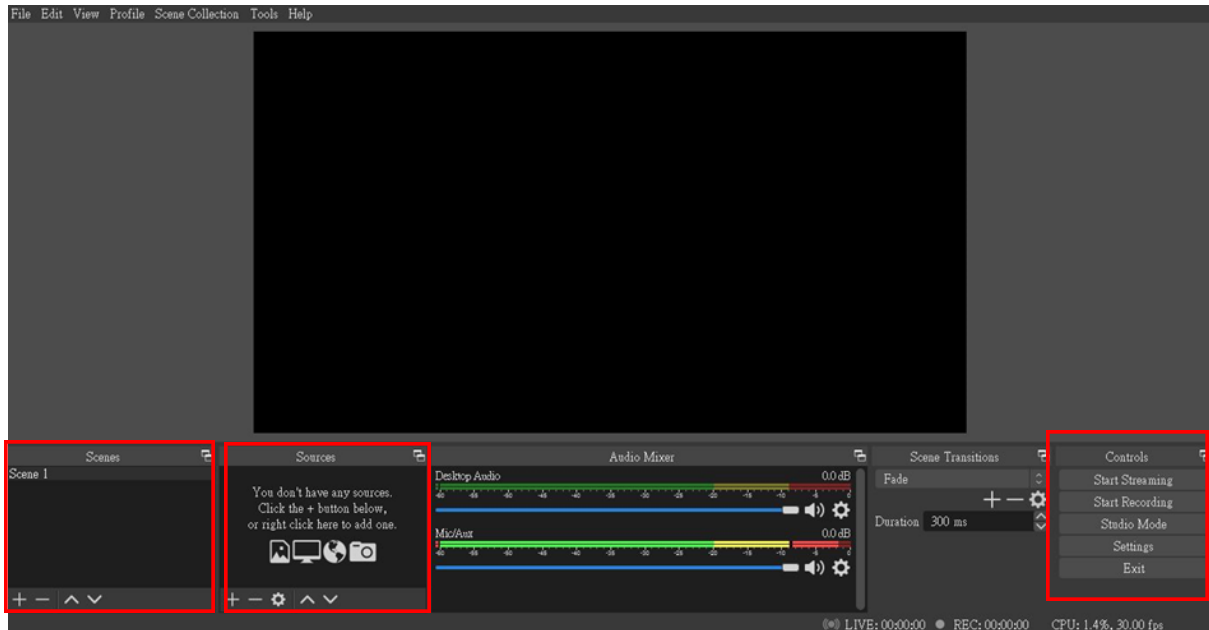


1. First, find the "Scenes" window, click "+" in the lower left corner, and then enter the name of the scene to create a new scene.

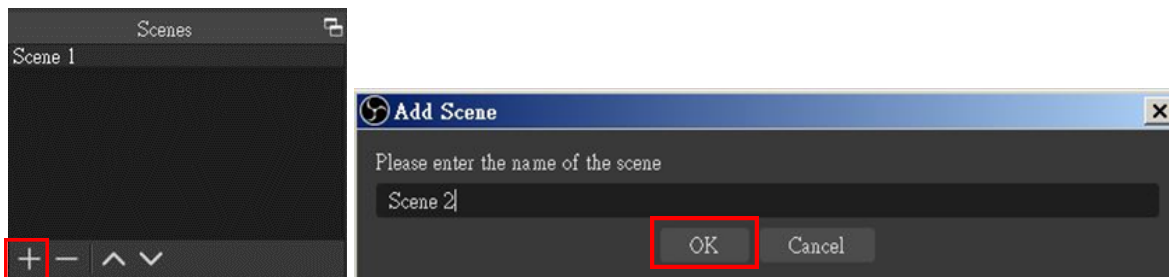





2. Find the **"Source"** window, click **"+"** in the lower left corner, and then select **"Display Capture"** or **"Video Capture Device"** to create a new source.

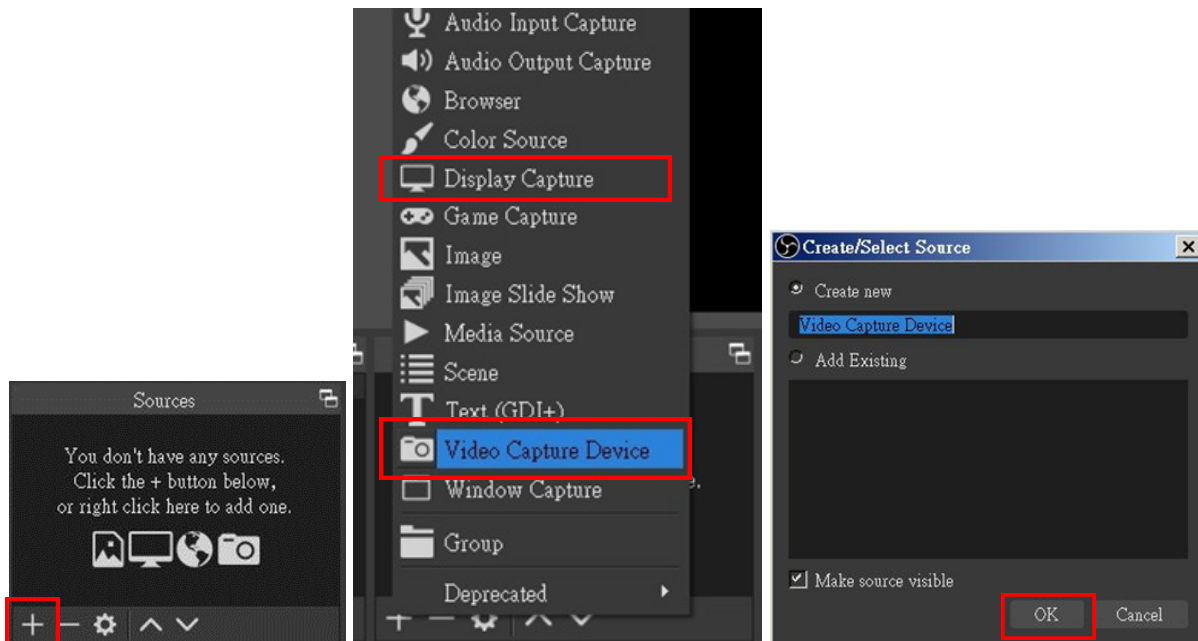


3. Next, you can set display capture properties. If you select **"Display Capture"** in step 2, you can select the primary monitor or other extended monitor as the display source. If you select **"Video Capture Device"** in step 2, you can select a USB video device as the display source. After all settings are completed, click **"OK"**.

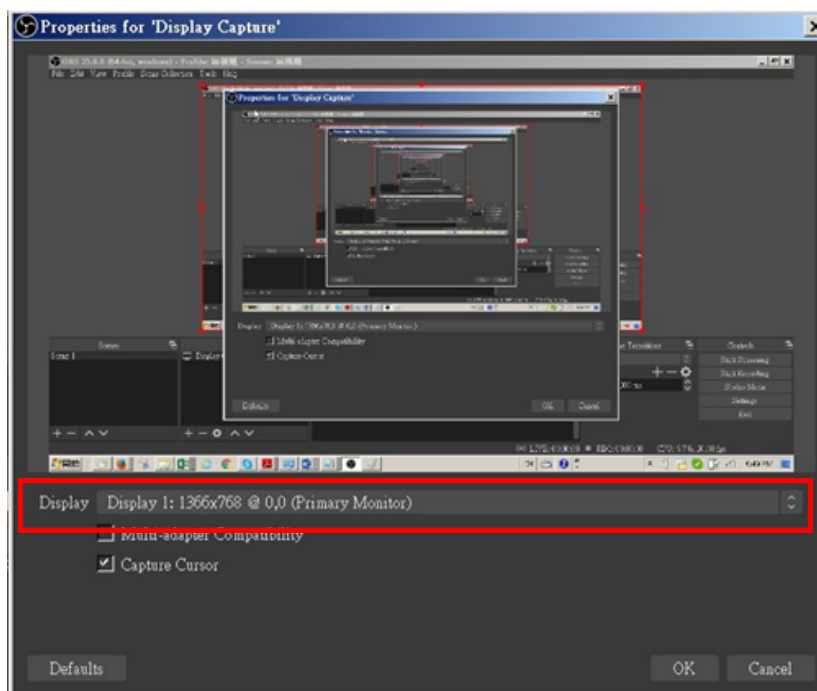

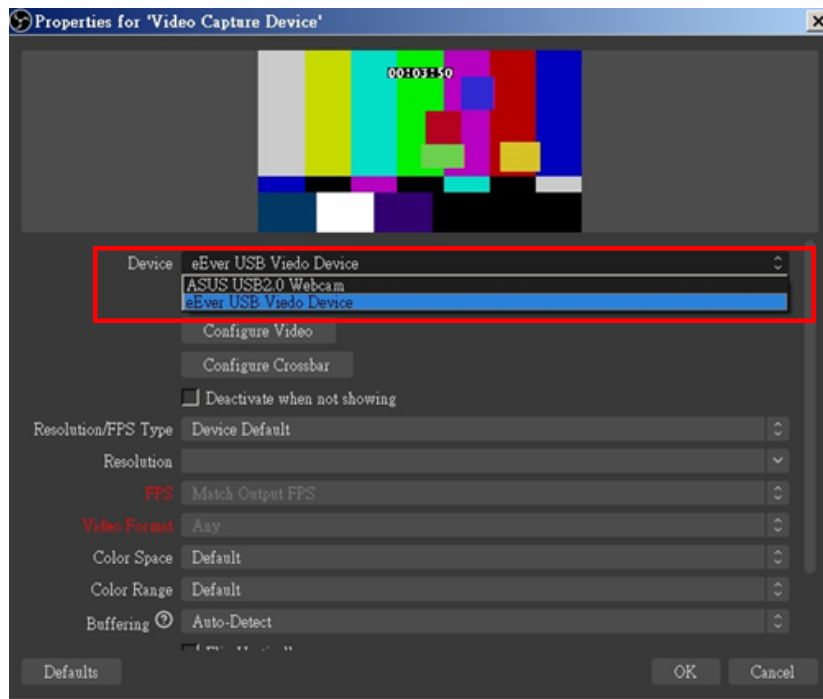


- 4. Click **"Settings"** and then select **"Stream"** to perform streaming settings. Users can choose service providers, including Twitch, YouTube, etc.

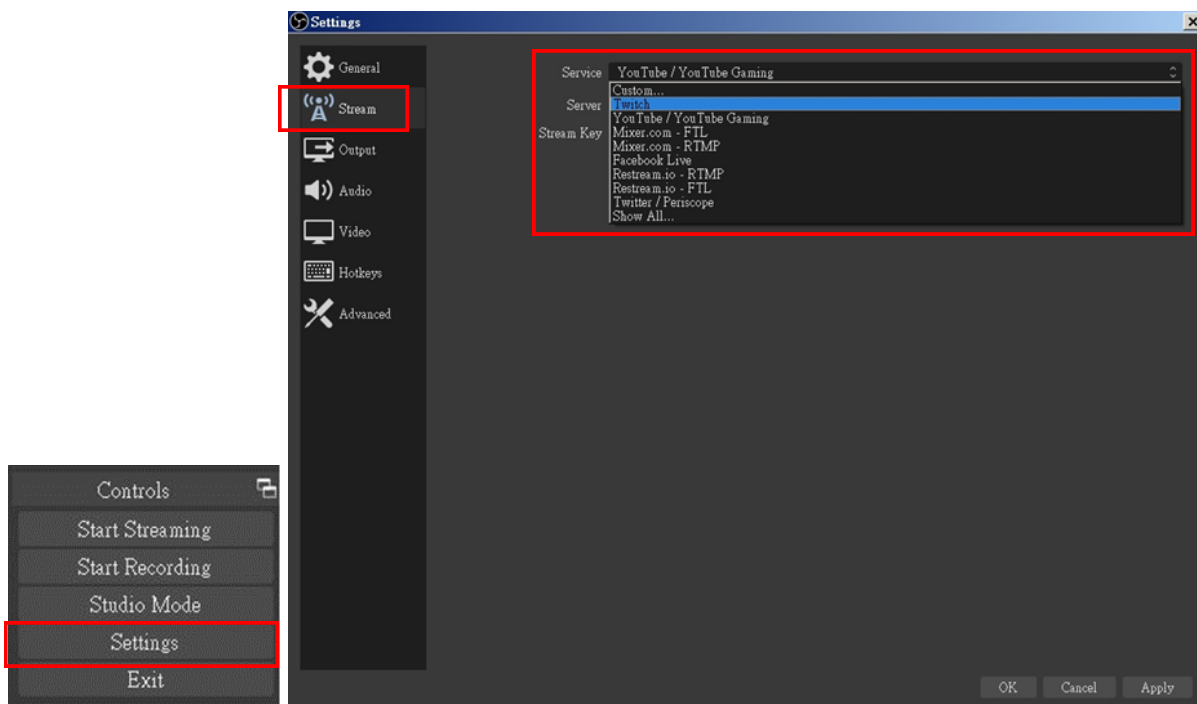





- Paste the stream key provided by the service provider into the **"Stream Key"** field, then click **"Apply"** and **"OK"** after setting. In addition, users can click **"Get Stream Key"** at this step to open the service provider website.

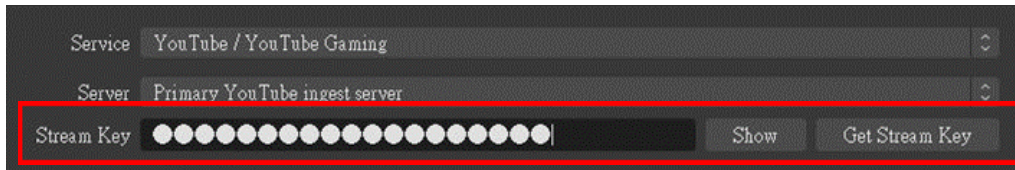

- Please click **"Start Streaming"**. At this time, the screen after clicking **"Start Streaming"** will be displayed in the live video.



- On the other hand, users can also click **"Start Recording"** to record videos with OBS. Besides, you can click **"Settings"** and then select **"Output"** to set **"Recording Path"** and **"Recording Format"**.

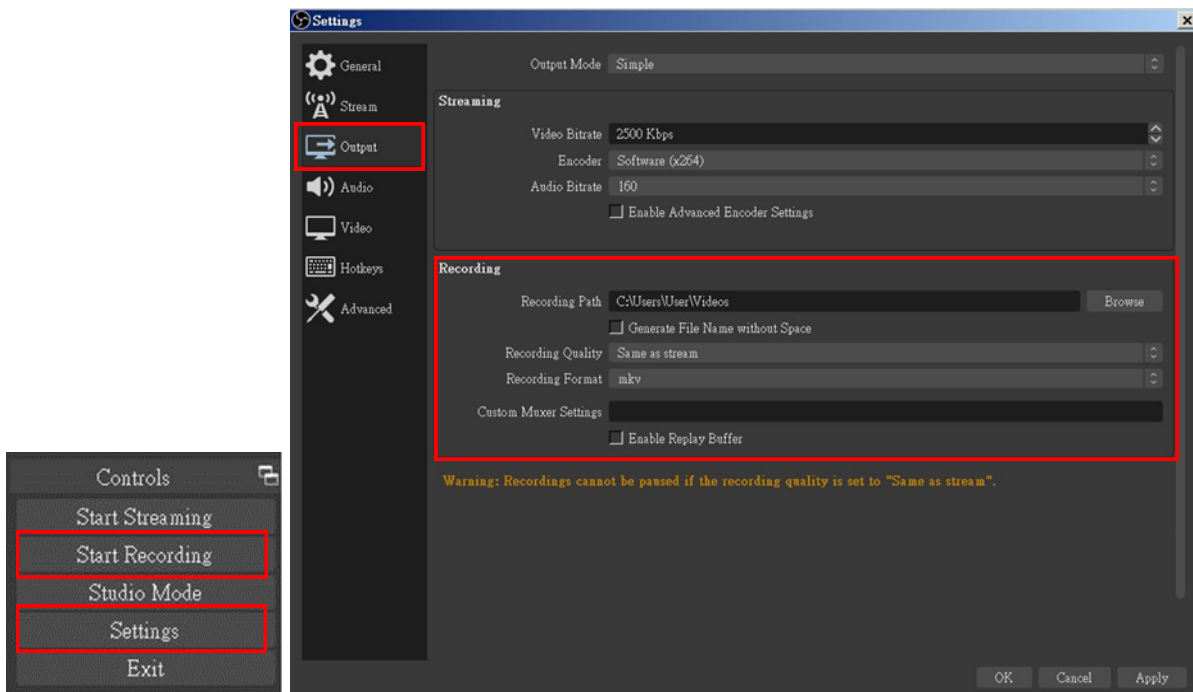

The procedures the manual demonstrates are based on the interface that each website provides at the time when the manual is written. Please note that the above procedures are subject to change due to platform updates.



Troubleshooting

Most of the issues experienced by users are not from the USB capture device itself, but from the sophisticated software and hardware combination of PC or laptop. Please follow the following suggestions if help is required:

1. OBS is a popular USB capture freeware and has excellent compatibility. Please download it and start with OBS if users are not familiar with USB capture devices. <https://obsproject.com/download>
2. Due to the complexities of operating systems and computer hardware, different USB ports on the PC or laptop may have different performance or limitations. Please try all USB ports to see if there are any differences.
3. Please use the USB cable in the box. We do not guarantee the overall performance when the USB capture box works with some other USB cables.
4. HDMI/SDI cable quality may also play an essential role when capturing video. Please be sure that HDMI/SDI cable can do 4K2K@60 HDMI/SDI signal transmission or better. Try different cables when the device is not able to work as expected.
5. If audio has noise when using the PotPlayer software, please adjust the audio renderer to WaveOut on the software. The setting path is:
PotPlayer → Audio → Audio Output → Audio Renderer → WaveOut
6. If there are problems such as video flipping or wrong direction when using VLC software, please rotate, flip or transpose the video in the VLC software to correct the video. The setting path is:
Tool → Effects & Filters → Video Effects → Geometry → Transform

USB Pin Definition



	P1	P2	
VBUS	A4, B4, A9, B9	1	VBUS
Dn1	A7	2	D-
Dp1	A6	3	D+
GND	A1, B1, A12, B12	4	GND
SSTxn1	A3	5	SSRX-
SSTxp1	A2	6	SSRX+
GND	A1, B1, A12, B12	7	GND
SSRxn1	B10	8	SSTX-
SSRxp1	B11	9	SSTX+



Tech Support

Have technical questions? We may have answered them already!

Please visit BZBGear's support page (bzbgear.com/support) for helpful information and tips regarding our products. Here you will find our Knowledge Base (bzbgear.com/knowledge-base) with detailed tutorials, quick start guides, and step-by-step troubleshooting instructions. Or explore our YouTube channel, BZB TV (youtube.com/c/BZBTVchannel), for help setting up, configuring, and other helpful how-to videos about our gear.

Need more in-depth support? Connect with one of our technical specialists directly:

Phone	Email	Live Chat
1.888.499.9906	support@bzbgear.com	bzbgear.com

Warranty

BZBGear Pro AV products and cameras come with a three-year warranty. An extended two-year warranty is available for our cameras upon registration for a total of five years.

For complete warranty information, please visit bzbgear.com/warranty.

For questions, please call 1.888.499.9906 or email support@bzbgear.com.



Mission Statement

BZBGear is a breakthrough manufacturer of high-quality, innovative audiovisual equipment ranging from AVoIP, professional broadcasting, conferencing, home theater, to live streaming solutions. We pride ourselves on unparalleled customer support and services. Our team offers system design consultation, and highly reviewed technical support for all the products in our catalog. BZBGear delivers quality products designed with users in mind.

Copyright

All the contents in this manual and its copyright are owned by BZBGear. No one is allowed to imitate, copy, or translate this manual without BZBGear's permission. This manual contains no guarantee, standpoint expression or other implies in any form. Product specification and information in this manual is for reference only and subject to change without notice.

All rights reserved. No reproducing is allowed without acknowledgement.