

# RESISTOR PACK

## END OF LINE, 5% ACCURACY

**ADI**  
**PRO**

ADI PRO's end of line resistor helps to prevent false alarms and provide zone supervision within fire and intrusion alarm systems. With 5% accuracy and known value, the resistor allows a control panel to more effectively differentiate between normal operation and fault or alarm conditions.

## FEATURES


Ideal for end of line applications with closed loop or open loop switches

Two 1K resistors per unit safely convert electrical energy to heat at the rate of 1/8 watt

Quick and easy to connect, with four cable leads per unit: two for blue cable and two for black cable

5% resistance accuracy

Limited Lifetime Warranty

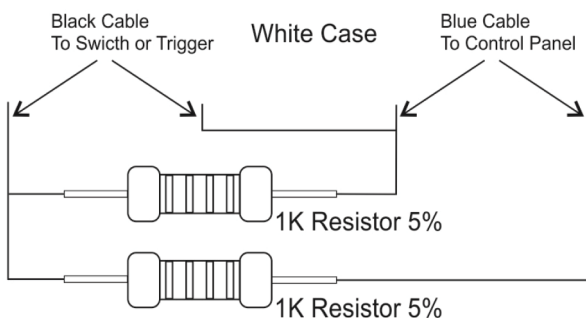

Normal Resistance: 2K  $\Omega$ ; Alarm Resistance: 1K  $\Omega$   
Shorted Resistance: 0  $\Omega$ ; Open Resistance: Infinite  $\Omega$



## Product Specifications

PART #: 0E-MCR21KPK2  
UPC: 840049306950

Unit Length: 11.8" (30cm)

Case Diameter:  $\Omega$  0.25 x 1" ( $\Phi$  6 x 25mm)

Color: Blue and black cable, white case

Power Input: 12VDC

Package Quantity: 10 units



For more information contact  
your ADI Sales person or visit  
[adiglobal.com/adiexclusivebrands](http://adiglobal.com/adiexclusivebrands)