


**MANUAL ANALOG OVERRIDE SWITCH**



**RIBMNA1D0**

2.75" Track Mount Manual Analog Override Switch + Monitor with 24 Vac/dc Power Input



**Legend for Selecting Output for Jumpers**

- Top 2 pins covered by jumper
- Bottom 2 pins covered by jumper
- Only 1 pin covered by jumper

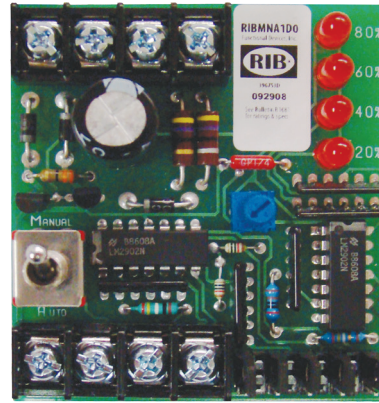

**SPECIFICATIONS**

- Operating Temperature:** -30 to 140° F
- Humidity Range:** 5 to 95% (noncondensing)
- Dimensions:** 2.450" x 2.750" x 1.270"
- Track Mount:** 2.750"
- Input Voltage:** 24 Vac/dc
- Input Current:** 90mA Max.
- Range/Impedance Override:** 0-5 Vdc, 200 Ω Min.  
0-10 Vdc, 400 Ω Min.  
0-15 Vdc, 1 kΩ Min.  
0-20mA dc, 500 Ω Max.
- Feedback Contact:** 2A Max. @ 24 Vac/dc

**Notes:**

- Set the jumpers according to your input signal (Analog signal from the controller.) Example: When controlling a damper with 0-10 Vdc, the jumpers need to be in position for the 0-10 Vdc override range. If the LED range does not match your analog scale, ensure the jumpers are set for the proper range.
- Feedback contact closed when switch is in Manual position, open when switch is in Auto position.

- PROVIDES MANUAL OVERRIDE IF CONTROLLER DOES NOT SUPPORT OVERRIDE CAPABILITY
- ALLOWS YOU TO MANUALLY MAKE ADJUSTMENTS TO YOUR END DEVICE REMOTELY INSTEAD OF AT YOUR CONTROL PANEL
- SENDS OVERRIDE STATUS BACK TO CONTROLLER VIA FEEDBACK
- MULTI-RANGE ANALOG OUTPUT