


**NETWORK COMPATIBLE RELAY**

**RIBTW24B-MBAI**

Enclosed Modbus® RTU Network Relay Device;  
 One Binary Output (20 Amp Relay SPDT + Over-ride);  
 Two Binary Inputs (Dry Contact, Class 2);  
 One Analog Input (T2 Thermistor / 0-5 Vdc / 0-10 Vdc);  
 24 Vac/dc Power Input; **Optional End of Line Resistor (EOL) Included.**

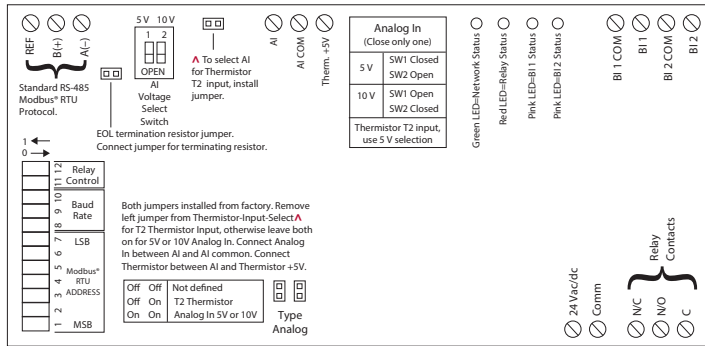

**SPECIFICATIONS**

- # Relays & Contact Type:** One (1) SPDT Continuous Duty Coil
- Expected Relay Life:** 10 million cycles minimum mechanical
- Operating Temperature:** -30 to 140° F
- Humidity Range:** 5 to 95% (noncondensing)
- Operate Time:** 18ms
- Network Communication:** Green LED
- Relay Status:** Red LED On = Activated
- Current Sensor Status:** Pink LED On = Activated
- Binary Input Status:** Pink LED On = Activated
- Dimensions:** 4.28" x 7.00" x 2.00" with .75" NPT Nipple
- Track Mount:** MT212-6 Mounting Track Provided
- Approvals:** CE, UL Listed, UL916, C-UL, RoHS
- Housing Rating:** UL Listed, NEMA 1, C-UL, CE Approved, UL Accepted for Use in Plenum, Also available NEMA 4 / 4X
- Gold Flash:** No
- Relay Override Switch:** DIP Switch Control

- Network Media:** Twisted Pair 22-24AWG, shielded recommended, EIA/TIA-485 (standard RS485)
- Terminations:** Functional Devices product installed at both ends of the standard RS485 Modbus® RTU network – Use 120 Ω end of line resistors. All other cases – Follow instructions from the device installed at the end of the Modbus® network.
- Polarity:** Network is polarity sensitive
- Baud Rate:** 9600, 19200, 38400, 57600 (DIP Switch Selectable)

- Contact Ratings:**
  - 20 Amp Resistive @ 277 Vac
  - 20 Amp Ballast @ 277 Vac
  - 16 Amp Electronic Ballast @ 277 Vac (N/O)
  - 10 Amp Tungsten @ 120 Vac (N/O)
  - 1110 VA Pilot Duty @ 277 Vac
  - 770 VA Pilot Duty @ 120 Vac
  - 2 HP @ 277 Vac
  - 1 HP @ 120 Vac
- Power Input Ratings:**
  - 81 mA @ 24 Vdc
  - 111 mA @ 24 Vac

- Notes:**
  - Modbus® Address & Baud Rate must be set prior to power up via DIP switches.
  - Order NEMA 4 housing by adding "-N4" to end of model number. (RIBTW24B-MBAI-N4)
  - Order with grey lid by adding "-GY" to end of model number. (RIBTW24B-MBAI-GY)
  - Order NEMA 4 housing with grey lid by adding "-N4-GY" to end of model number. (RIBTW24B-MBAI-N4-GY)
  - This model utilizes:
    - Physical coil 1 (Relay output)
    - Physical binary input 1 (Dry contact binary input)
    - Physical binary input 2 (Dry contact binary input)
    - Physical input register AI 1 (Analog input)
  - Thermistor Type 2 (T2) Precon 10 K @ 77°F (25°C) PN ST-R24, Model 24, (or equivalent.) Thermistor not included. (Range -39 to 187°F)
  - For all versions, raw analog default settings are 0 and 1023 (real), respectively.
  - When connecting 24 Vac to both the RIB(s) and a half-wave device, damage to device can occur.
    - Option 1: Use separate transformers for each device.
    - Option 2: Add diode between devices, see Option 2 note below.^^
  - Address and Baud Rate Settings on Bulletin B1676 available on website.

Modbus® is a registered trademark of Schneider Electric licensed to the Modbus Organization, Inc.


DIP SWITCHES*			BAUD RATE
8	9	10	
0	0	0	9600
0	0	1	19200
0	1	0	38400
0	1	1	57600

DIP SWITCHES*		RELAY STATE**
11	12	
1	0	Auto
X	1	Override on
0	0	Override off

\* 0 = Open ; 1 = Closed  
 \*\* Device must be powered for override

All other combinations=9600 baud

- Dry contact binary input is a general purpose input that is not tied to the relay internally. Can be used with any dry contact switching device, such as a current sensor, to feed back to the network.

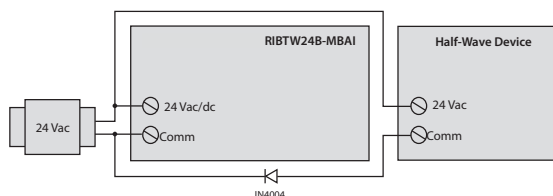

- ^^ Option 2: Add diode on 24 Vac power (Comm) interconnection between devices. Band on diode faces towards RIB(s).