


1-Port 10G Open SFP+ Network Card - PCIe - Intel Chip - MM/SM

Product ID: PEX10000SFPI

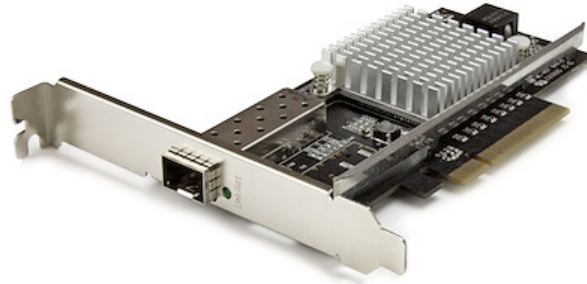

This fiber network card delivers reliable, high-performance network connectivity, by adding an open SFP+ slot to your server or high-powered workstation. It provides an easy and cost-effective way to upgrade your server or workstation to a 10 Gigabit fiber network using the SFP+ module of your choice and gives you the flexibility to use either multimode or single-mode fiber.

Several factors drive the need for more bandwidth in your network infrastructure. An increase in the number of network users and data-intensive applications, such as multimedia streaming and large file transfers all contribute to the need for more bandwidth in your network infrastructure. This fiber NIC lets you take advantage of the increased speed and stability of a 10 Gigabit network, with data transfers of up to 10Gbps.

The fiber NIC is compatible with most 10GbE SFP+ transceivers. This gives you flexible and scalable configuration options for connecting your computer directly to a fiber network, at greater distances.

The card features an open SFP+ slot with support for one interchangeable 10GBase SFP+ module. This gives you the option to use the fiber transceiver module that best suits your network needs based on distance and connector type. StarTech.com offers a variety of SFP+ transceiver modules including the SFP10GLRST single-mode SFP+ the SFP10GLRMST multi-mode SFP+, and SFP10GSRST multimode LC with DDM.

In addition, StarTech.com provide a dependable solution for linking telecom and data communications equipment, such as routers and switches.

The 10 Gigabit network card features the Intel 82599 chipset, delivering the power, performance and enhanced capabilities you need for reliable network connections to your server or computer. The Intel chip offers many advanced features including Intel Virtualization Technology for Connectivity, PXE network boot support and up to 15K jumbo frame support.

The PEX10000SFPI is backed by a StarTech.com 2-year warranty and free lifetime technical support.

Certifications, Reports and Compatibility

Applications

- Add 10Gbps network connectivity to file or application servers and high-performance workstations
- Transmit full 10 Gigabit network speeds to a remote terminal over longer distances than copper cabling
- Supports secure setups - a direct fiber connection means no electronic interference, which can be a problem with RJ45 network cards
- Upgrade your onboard network adapter to 10 Gigabit SFP+, for faster communication
- Create a video / audio editing console with 10Gbps access to network storage
- Ideal for remote embedded industrial monitoring systems, and high-speed video surveillance

Features

- Add a 10GbE SFP+ slot to your server or workstation for fast, high bandwidth connectivity, compatible with SR or LR transceivers
- Compatible with multimode or single-mode fiber
- Intel 82599 chipset with Intel Virtualization Technology for Connectivity
- PXE network boot support
- Compliant with IEEE 802.3ae (10GBASE-LR/SR only) and IEEE 802.3aq (10GBASE-LRM)
- Compliant with PCI Express Rev 2.0 specification, using PCIe x8 (or higher) slot
- Up to 15K jumbo frame support

Hardware

| | |
|--------------------|--|
| Warranty | 2 Years |
| Ports | 1 |
| Interface | Fiber (10 Gigabit Ethernet) |
| Bus Type | PCI Express |
| Card Type | Standard Profile (LP bracket incl.) |
| Industry Standards | IEEE 802.3ae (10GBASE-LR/SR only), IEEE 802.3aq (10GBASE-LRM) PCI Express Rev 2.0, using PCIe x8 (or higher) slot |
| Chipset ID | Intel - 82599 |

Performance

| | |
|----------------------------|---|
| Maximum Data Transfer Rate | 10 Gbps |
| Compatible Networks | 10 Gbps |
| Full Duplex Support | Yes |
| Jumbo Frame Support | 9K max. |
| Promiscuous Mode | Yes |
| Supported Protocols | IEEE 802.3ad (Link Aggregation) IEEE 802.3x (Flow Control Support) IEEE 802.1Q (VLAN tagging) |

Connector(s)

| | |
|-------------------|----------------|
| Connector Type(s) | PCI Express x8 |
| Internal Ports | SFP+ Slot |

Software

| | |
|------------------|---|
| OS Compatibility | Windows 7, 8, 8.1, 10 Windows Server 2008 R2, 2012, 2012 R2, 2016, 2019 (Windows Drivers are supported in 64-bit only) Linux 2.6.24 to 4.11.x <i>LTS Versions only</i> |
|------------------|---|

Environmental

| | |
|-----------------------|---------------------------|
| Operating Temperature | 5C to 50C (41F to 122F) |
| Storage Temperature | -20C to 60C (-4F to 140F) |
| Humidity | 20% ~ 80% RH |

Physical Characteristics

| | |
|----------------|------------------|
| Color | Black |
| Material | Steel |
| Product Length | 5.3 in [13.5 cm] |
| Product Width | 0.7 in [18 mm] |
| Product Height | 4.7 in [12 cm] |



| | |
|-------------------|----------------|
| Weight of Product | 3.6 oz [102 g] |
|-------------------|----------------|

Packaging Information

| | |
|----------------|------------------|
| Package Length | 6.8 in [17.2 cm] |
|----------------|------------------|

| | |
|---------------|------------------|
| Package Width | 5.6 in [14.2 cm] |
|---------------|------------------|

| | |
|----------------|----------------|
| Package Height | 1.3 in [32 mm] |
|----------------|----------------|

| | |
|---------------------------|----------------|
| Shipping (Package) Weight | 6.3 oz [178 g] |
|---------------------------|----------------|

What's in the Box

| | |
|---------------------|----------------------------------|
| Included in Package | 10G open SFP+ fiber network card |
| | low-profile bracket |
| | quick-start guide |

****Product appearance and specifications are subject to change without notice.***

