


# INSTALLATION INSTRUCTIONS



## LED PLASTIC SLIM SURFACE MOUNT 12"

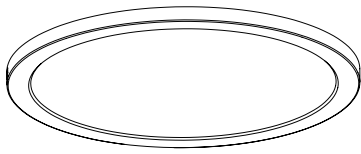

3CCT Selectable



### WARNING

FOR YOUR SAFETY READ AND UNDERSTAND INSTRUCTIONS COMPLETELY BEFORE STARTING INSTALLATION. BEFORE WIRING TO POWER SUPPLY, TURN OFF ELECTRICITY AT THE FUSE OR CIRCUIT BREAKER BOX.



### CAUTION: RISK OF FIRE

SUPPLY CONDUCTORS (POWER WIRES) CONNECTING THE FIXTURE MUST BE RATED MINIMUM 90°C. IF UNCERTAIN, CONSULT AN ELECTRICIAN.



### CAUTION: RISK OF ELECTRIC SHOCK

DISCONNECT POWER BEFORE OR CIRCUIT BREAKER BEFORE INSTALLING OR SERVICING.



### SAFETY PRECAUTIONS

FOR SAFETY, READ AND UNDERSTAND INSTRUCTIONS COMPLETELY BEFORE STARTING INSTALLATION. ELECTRICITY SHOULD BE TURNED OFF AT THE FUSE OR THE CIRCUIT BREAKER BOX BEFORE INSTALLING THE FIXTURE. ALL ELECTRICAL CONNECTIONS MUST BE IN ACCORDANCE WITH N. E. C. OR YOUR LOCAL CODE.


### ASSEMBLY INSTRUCTIONS

1. PREPARING FOR INSTALLATION: DISCONNECT ELECTRICAL POWER BEFORE INSTALLING OR SERVICING ANY PART OF THIS FIXTURE.
2. THIS PRODUCT SHALL BE SURFACE MOUNTED WITH JUNCTION BOX OR NON-COMBUSTIBLE SURFACE ABOVE 4 FEET (1.2 METER) HIGH. USER SHOULD PREPARE NECESSARY ACCESSORIES AND SPARE PARTS (NOT PROVIDED) INCLUDING JUNCTION BOX AND SCREWS.

### PACKAGE CONTENTS

<b>A</b> Slim Flush Mount Fixture  Ø11.81" 1.06" 0.51" (1 pc)	<b>B</b> Mounting Plate  (1 pc)	<b>C</b> Mounting screws  (2 pcs)
<b>D</b> Anchors  (2 pcs)	<b>E</b> Anchor Screws  (2 pcs)	<b>F</b> Wire Nuts  (3 pcs)

### TOOLS REQUIRED

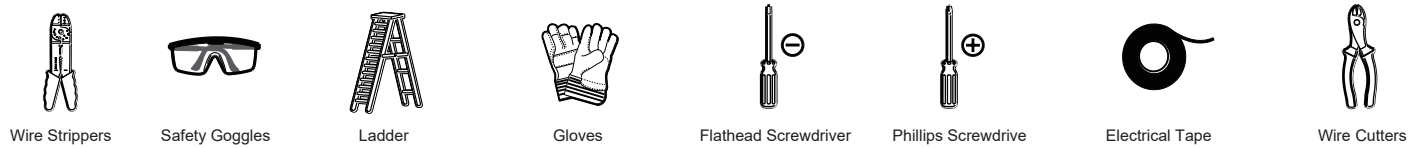


### INSTALLATION (CONSULT A QUALIFIED ELECTRICIAN BEFORE INSTALLING)

#### FLUSH MOUNT


**Step 1:** Pull the supply wires and house ground wire from the Outlet Box.

Position the mounting plate over the Junction Box. Mark the location of the two holes located on the Mounting Plate. Be sure to mark only the narrow parts of the hole. Remove the Mounting Plate from the ceiling. Drill the two holes using the appropriate type and size drill bit. Insert anchors into the holes.


Install the Mounting Plate to the Outlet Box by using two Mounting screws. Feed the two Anchor screws through the holes. Tighten the Anchor Screws into the ceiling anchors until the mounting plate sits flush against the ceiling. (See Fig. 1)

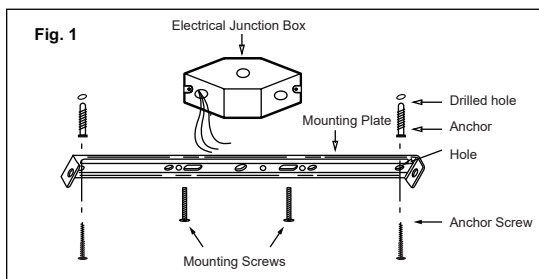


**Step 2:** Select CCT on the switch. Make Wire Connections: Connect the house ground wire to the fixture ground wire; connect the white supply wire to the white fixture wire; connect the black supply wire to the black fixture wire by using the wire connectors. Carefully tuck all wires back into the Junction Box (1). (See Fig. 2)

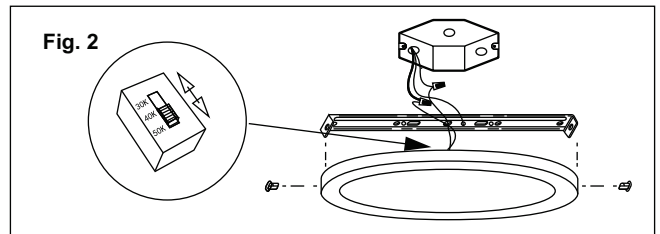

**Step 3:** Snap and fix the clip in the bracket. (See Fig. 3)

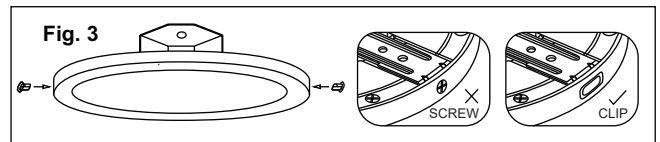

**Step 4:** Turn on the power and light up the lamp. (See Fig. 4)



**WARNING:** Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

### COMPATIBLE DIMMERS

LUTRON	
• PD-6WCL	• 6681
• DVCL-153P	• 6672
• CTCL-153P	
• MACL-153M	
• TGCL-153P	