

Tech Support for US #833-574-9124 (Option 2)  
(NA) Info@wboxtech.com  
Tech Support for UK #1706-510-500 (Option 2)  
(EMEA) wboxinfo.eu@adiglobal.com



0E-24PRJ45FG




## 26-Port Gigabit PoE Switch

24 Port PoE + 2 Shared  
Port (RJ-45 or SFP) Uplinks

Tech Support for US  
#833-574-9124 (Option 2)  
(NA) Info@wboxtech.com  
Tech Support for UK  
#1706-510-500 (Option 2)  
(EMEA) wboxinfo.eu@adiglobal.com



The 26Port/24 PoE Switch is fully integrated to support security monitoring, provides Gigabit packet forwarding capability,as well as fast Ethernet transfer rates by utilizing the appropriate bandwidth to ensure clear images/smooth transmission and enough bandwidth for high-definition video.

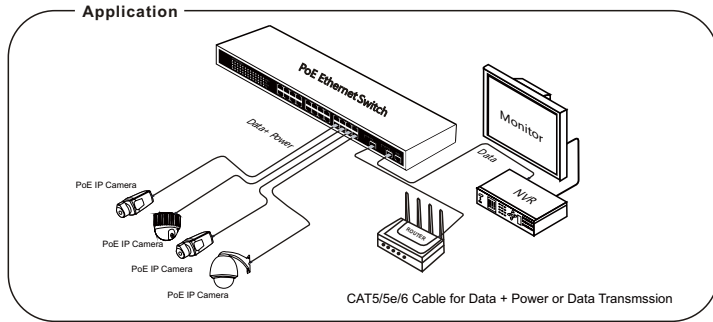

## Features

- Conforms to IEEE802.3, IEEE 802.3u, IEEE 802.3ab, IEEE 802.3af, IEEE 802.3at
- Provides 24 10/100/1000Base-TX ports and 2 Shared Gigabit Ports(RJ-45 or SFP)
- Provides 24 PoE+ injectors with a total of 370W Built-in power supply
- High backplane bandwidth of 52Gbps
- IEEE802.3x Flow control
- EMI standards comply with FCC, CE class B
- UL listed

## Notice

The transmission distance is related to the connected cable. Standard CAT5e/6 network cable and the quality of camera will help maximize the furthest distance possible

Be sure to have the model number and the nature of the problem available. In the event of replacement, the return product will be credited to Buyer's account and a new invoice issued for the replacement item. ADI reserves the right to issue a credit only in lieu of replacement.

If any W Box Technologies product is found to be in good working order or such product's inability to function properly is a result of user damage or abuse, the product will be returned to Buyer in the same condition as received and Buyer shall be responsible for any return freight changes.

## 5. Governing Law

For North America – The laws of State of New York apply to this Limited Warranty.

For EMEA – This Limited Warranty shall be governed by the laws of England and Wales.


## 6. Miscellaneous

Where any term of this Limited Warranty is prohibited by such laws, it shall be null and void, but the remainder of the Limited Warranty shall remain in full force and effect.

## ■ Board Diagram

26 Port Gigabit PoE Switch

Front

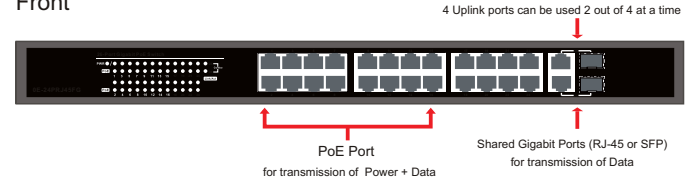

Back



## ■ Installation Procedures

Please check the following items before installation. If any items are missing, please contact ADI or the installing company.

- |                                     |     |
|-------------------------------------|-----|
| ● 26 Port/24 PoE Gigabit PoE Switch | 1pc |
| ● Rack mount kit                    | 1pc |
| ● AC power cable                    | 1pc |
| ● User manual                       | 1pc |

### Please follow the below installation steps

- 1) Turn off power to the unit and power off PoE devices before installation.  
Note: Installing with power on will damage the equipment.
- 2) Use a network cable to connect the PoE IP camera or other devices to related 1-24 PoE port of the PoE Switch.
- 3) Use a network cable to connect PoE switch via uplink port to NVR/Router etc.
- 4) Connect the AC cable to the unit
- 5) Check if the installation is correct, making sure all involved items are in good condition and well connected.
- 6) Ensure the PoE Switch is powered and work properly.

## Specifications

Item		Description	
Power	Power Supply	Built-in power supply	
	Input Vlotage	100~240VAC	
	Output Vlotage	52 VDC	
	PoE Budget	370W for 24 PoE ports	
Ethernet	Speed	1~24 Port: 10/100/1000Mbps 25-26 Port: Shared Gigabit Port (RJ-45 or SFP)	
	Transmission Distance	RJ-45: 328ft (100 meters) SFP Port: Transmission distances vary with type of SFP module used. SFP module not included	
Network Switch	Ethernet Standards	IEEE 802.3/802.3u/802.3ab/802.3af/at	
	Switching Capacity	52Gbps	
	Transfer Rate	14,880pps for 10Mbps	
		148,800pps for 100Mbps	
		1,488,000pps for 1000Mbps	
MAC Address	8K MAC address table		
LINK/ACT Indicator	On	Green	The port is connected
	Blinks	-	The port is receiving or transmitting data
	Off	-	The port is not linked successfully with the device
PoE Indicator	On	Green	Power Device is connected
	Off	-	Power device is not connected or power forwarding fails
	PoE pin assignmnet		V+(RJ-45 Pin 1,2), V-(RJ-45 Pin 3,6)
Environment	Working Temperature	0~40°C (32~104 Deg. F)	
	Storage Temperature	-40~70°C (-40~158 Deg. F)	
	Humidity non-condensing	0~85%	
Mechanical	Dimension L* W * H	17 19/64" x 7 51/64" x 1 45/64"	
		440 x 200 x 44mm	
	Color	Black	

Specifications are subject to change without notice

maximum liability shall not in any case exceed the purchase price of the product, which shall be fixed as liquidated damages and not as a penalty and shall be the complete and exclusive remedy against ADI.

### 3. Limitation on Liability to Buyer's Customers.

Buyer agrees to limit liability to its customers to the fullest extent permitted by law. Buyer acknowledges that ADI shall only be deemed to give consumers of its products such statutory warranties as may be required by law and at no time shall Buyer represent to its customers and/or users of ADI products that ADI provides any additional warranties. By accepting the products, to the fullest extent permitted by law, Buyer assumes all liability for, and agrees to indemnify and hold ADI harmless against and defend ADI from, any and all suits, claims, demands, causes of action and judgments relating to damages, whether for personal injury or to personal property, suffered by any person, firm, corporation or business association, including but not limited to, Buyer's customers and/or users of the products because of any failure of the products to detect and/or warn of the danger for which the goods were designed or any other failure of the products whether or not such damages are caused or contributed to by the sold or joint concurring negligence or fault of ADI.

### 4. Returns

Subject to the terms and conditions listed below, during the applicable warranty period, ADI will replace Product or provide a credit at purchase at its sole option free of charge any defective products returned prepaid. Any obligations of ADI to replace Limited Lifetime warranty products pursuant to this warranty which result from defect are limited to the availability of replacement product. ADI reserves the right to replace any such products with the then currently available products, or provide a credit in its sole discretion. In the event Buyer has a problem with any ADI product, please call your local ADI branch for return instructions:

For US call 1-800-233-6261

For Canada call 877-234-7378

For Puerto Rico call 787-793-8830

For EMEA contact your local ADI Branch

Raceway Conduit	Limited Lifetime
Wire Ties	Limited Lifetime
Magnetic Contacts	Limited Lifetime
Network Switches/PoE Switches	Limited Lifetime

## 2. EXCLUSION OF WARRANTIES, LIMITATION OF LIABILITY

THERE ARE NO WARRANTIES OR CONDITIONS, EXPRESS OR IMPLIED, OF MERCHANTABILITY, OR FITNESS FOR A PARTICULAR PURPOSE OR OTHERWISE, WHICH EXTEND BEYOND THE DESCRIPTION ON THE FACE HEREOF. TO THE FULLEST EXTENT PERMITTED BY LAW, IN NO CASE SHALL ADI BE LIABLE TO ANYONE FOR ANY (I) CONSEQUENTIAL, INCIDENTAL, INDIRECT, SPECIAL, OR PUNITIVE DAMAGES ARISING OUT OF OR RELATING IN ANY WAY TO THE PRODUCT AND/OR FOR BREACH OF THIS OR ANY OTHER WARRANTY OR CONDITION, EXPRESS OR IMPLIED, OR UPON ANY OTHER BASIS OF LIABILITY WHATSOEVER, EVEN IF THE LOSS OR DAMAGE IS CAUSED BY ADI'S OWN NEGLIGENCE OR FAULT AND EVEN IF ADI HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH LOSSES OR DAMAGES. Any product description (whether in writing or made orally by ADI or ADI's agents), specifications, samples, models, bulletin, drawings, diagrams, engineering sheets, or similar materials used in connection with the Buyer's order are for the sole purpose of identifying ADI's products and shall not be construed as an express warranty or condition. Any suggestions by ADI or ADI's agents regarding use, applications or suitability of the products shall not be construed as an express warranty or condition unless confirmed to be such in writing by ADI. ADI does not represent that the products it sells may not be compromised or circumvented; that the products will prevent any personal injury or property loss by burglary, robbery, fire or otherwise, or that the products will in all cases provide adequate warning or protection. Buyer understands and will cause its customer to understand that a properly installed and maintained product is not insurance or guarantee that such will not cause or lead to personal injury or property loss. CONSEQUENTLY ADI SHALL HAVE NO LIABILITY FOR ANY PERSONAL INJURY, PROPERTY DAMAGE OR OTHER LOSS BASED ON ANY CLAIM AT ALL INCLUDING A CLAIM THAT THE PRODUCT FAILED TO GIVE WARNING. However, if ADI is held liable whether directly or indirectly for any loss or damage with respect to the products it sells, regardless of cause or origin, its

## Trouble Shooting

- Make sure the equipment is installed according to the manufacturer's installation guide.
- Confirm RJ-45 cables comply with EIA/TIA 568A or 568B standard.
- Each Single PoE port can provide maximum power of 30w to the connected Power Device. Do not connect the Power Device with power over 30W.
- Total PoE power for all 24 PoE ports is limited to 370W
- Replace the equipment with a proper functioning 26 Port PoE Ethernet Switch to check if the equipment is damaged.
- For any questions, please contact W Box Tech Support 833-574-9124 (Option 2), email at [info@wboxtech.com](mailto:info@wboxtech.com) or the installing company

## Plug Producing Method

Instruments to be used: wire crimper, network tester and wire sequence of RJ-45 plug should conform with EIA/TIA568A or 568B.

- 1 Please remove 2 cm of the insulating layer and bare 8 pairs UTP cable
- 2 Separate the 8 pairs UTP cable and straighten
- 3 Line up the 8 pieces of cables per EIA TIA 568A or 568B
- 4 Cut off the cables to leave 1.5cm bare wire
- 5 Plug 8 cables into RJ-45 plug make sure each cable is in each pin
- 6 Use the wire crimper to crimp
- 7 Repeat above steps to make additional ends
- 8 Use network tester to test the cable

Pin	Color
1	White/Green
2	Green
3	White/Orange
4	Blue
5	White/Blue
6	Orange
7	White/Brown
8	Brown



EIA/TIA 568A

Pin	Color
1	White/Orange
2	Orange
3	White/Green
4	Blue
5	White/Blue
6	Green
7	White/Brown
8	Brown



EIA/TIA 568B



### Notice

When choose RJ-45 make sure if one end is EIA/TIA568A then other end should also be EIA/TIA568A.  
When choose RJ-45 make sure if one end is EIA/TIA568B. then other end should also be EIA/TIA568B.

## 1. Limited Warranty

### a. General

Subject to the terms and conditions of this Limited Warranty, from the date of sale through the period of time for product categories specified in Section 1(b), ADI warrants its W Box Technologies products to be free from defects in materials and workmanship under normal use and service, normal wear and tear excepted. Except as required by law, this Limited Warranty is only made to Buyer and may not be transferred to any third party.

ADI shall have no obligation under this Limited Warranty or otherwise if:

- (i) The product is improperly installed, applied or maintained;
- (ii) The product is installed outside of stated operating parameters, altered, or improperly services or repaired;
- (iii) Damage is caused by outside natural occurrences, such as lightning, power surges, fire, floods, acts of nature, or the like.
- (iv) Defects resulting from unauthorized modification, misuse, vandalism, or other causes unrelated to defective materials or workmanship, or failures related to batteries of any type used in connection with the products sold hereunder.

ADI only warrants those products branded as W Box Technologies products and sold by ADI. Any other products branded by third parties are warranted by the third party manufacturer for a period as defined by the third party manufacturer, and ADI assigns to Buyer those warranties and only those warranties extended by such third party manufacturers or vendors for non-ADI branded products. ADI does not itself warrant any non-ADI branded product and sells only on an as is basis in accordance with ADI's terms and conditions of sale.

### b. Specific Warranties for product categories are as follows:

Product Categories	Warranty Period
Walk Through & Hand Held Metal Detectors	12 months
Intrusion Wireless Communication Accessories	12 months
960H Analog Cameras	24 months
Televisions	24 months
CCTV Power Supplies	24 months
In Ceiling Speakers	24 months
Magnetic Locks	24 months
Surge Protection	24 months
UPS (uninterruptible power supplies)	24 months
Volume Controls	24 months
HDMI Distribution	24 months
6 Outlet Surge Protection	24 months
Intrusion Audio Devices	30 months
Video Surveillance Monitors	30 months
Power and Relays	30 months
Hold-up Buttons	30 months
Video Surveillance Baluns	30 months
Smoke Detectors	36 months
DVR's, NVR's	60 Months excluding HDD; 36 Months HDD (included in recorder)
HD Analog Cameras	60 months
IP Cameras	60 months
Racks	60 months
TV Mounts	60 months
PIR's	60 months
Analog Cables	Limited Lifetime
B Connectors	Limited Lifetime
Bus Terminals	Limited Lifetime
Extension Cords	Limited Lifetime
HDMI Cables	Limited Lifetime
Jacks, Cords and Intrusion Communication Accessories	Limited Lifetime
Patch Cables	Limited Lifetime
Patch Panels & Brackets	Limited Lifetime