



This document and its contents are subject to copyrights and other intellectual property rights owned by Alfa Laval (pub) or any of its affiliates (Alfa Laval). No part of this document may be copied, reproduced or transmitted in any form or by any means, or for any purpose, without Alfa Laval's prior express written permission. Information and services provided in this document are made as a benefit and service to the user, and no representations or warranties are made about the accuracy or suitability of this information and these services for any purpose. All rights are reserved.


**PRESSURE PLATE**  
(MOVABLE)

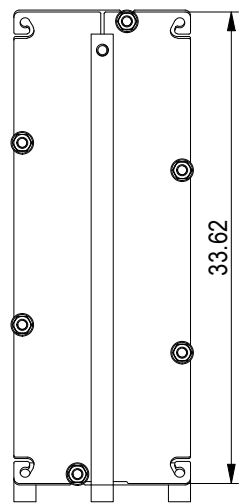


Space between pressure plate and supporting column should be kept free from fixed installations!

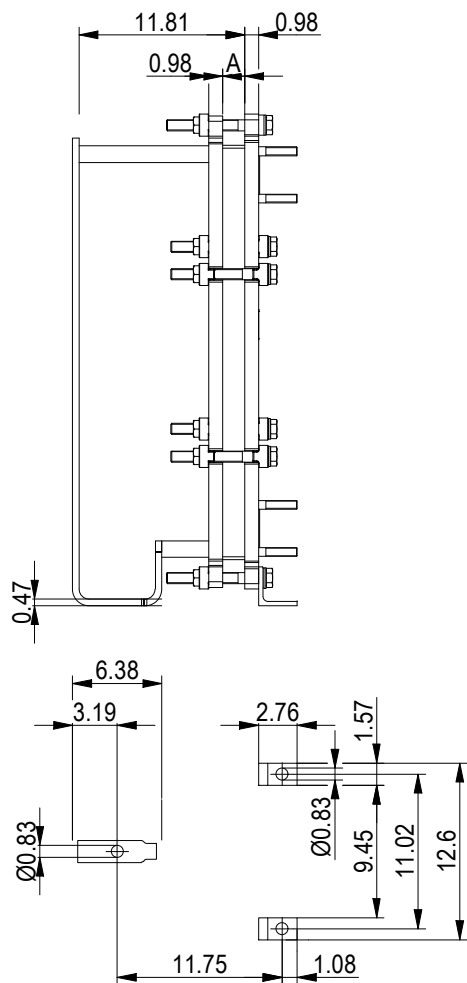

ASME B16.5 Class 150 NPS 2  
S1, S2, S3, S4

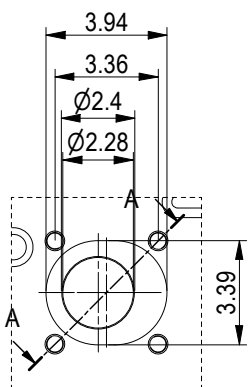


A-A:  
ALLOY 316

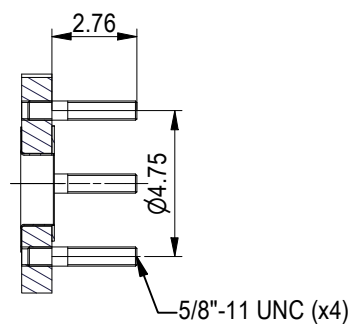

NO. OF UNITS                      1

null GPM  
null GPM



**FRAME PLATE**

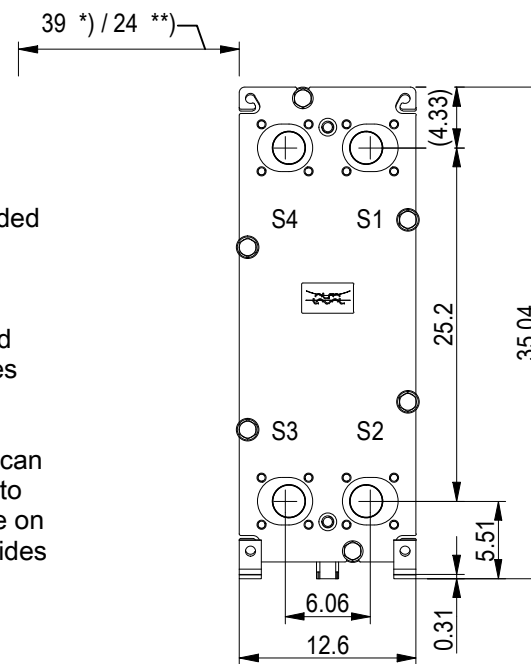


\*) Recommended free space for opening and closing to be applied on both sides

\*\*) Free space can be reduced to this distance on one of the sides


All dimensions in inches

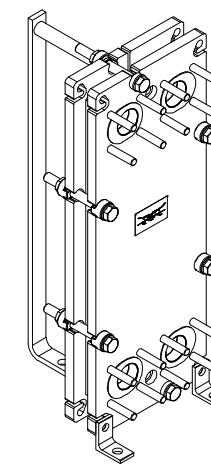

PROTECTION SHEET



PRESSURE PLATE



FRAME PLATE

APPROX. OUTER DIMENSIONS	
LENGTH	17.3 in
WIDTH	13.0 in
HEIGHT	34.6 in
APPROX. WEIGHTS	
NET WEIGHT, EMPTY	292 lb
WEIGHT FULL OF WATER	306 lb
PLATE MATERIAL	ALLOY 316
PLATE THICKNESS	0.5 mm
GASKET	NBRP ClipGrip™
AREA OF HEAT SURFACE	null ft²
CHANNEL ARRANGEMENT	1*12 MH / 1*12 ML




www.alfalaval.com

DRAWING  
GASKETED PLATE HEAT EXCHANGER

**T6-BFG**

ASME  
Code Section VIII Div.1

MAWP            150 psi at 150.1 °F  
MDMT            32.0 °F at 150 psi  
Designed and constructed in accordance with the 2019 ASME Code.



8240152972  
T6-BFG, 25 plates,

Do not use this drawing for foundation bolting or piping layout

DATE            4/27/22  
REVISION       0