

AT5 TIMING PULLEYS

METRIC TIMING PULLEY

5 mm Pitch

For 10 mm Wide Belts




Hub

Zinc Plated Steel Flanges

Aluminum



Part Number	No. of Teeth	Type	Pitch Dia (mm)	Out. Dia. (mm)	Flange Dia (mm)	Bore (mm)	Face Width (mm)	Overall Length (mm)	Hub Dia. (mm)
21AT5/12-2	12	6F	19.1	17.9	23.0	-	15.0	21.0	12.0
21AT5/14-2	14	6F	22.3	21.1	25.0	-	15.0	21.0	14.0
21AT5/15-2	15	6F	23.9	22.7	28.0	6.0	15.0	21.0	16.0
21AT5/16-2	16	6F	25.5	24.2	32.0	6.0	15.0	21.0	18.0
21AT5/18-2	18	6F	28.7	27.4	32.0	6.0	15.0	21.0	20.0
21AT5/20-2	20	6F	31.8	30.6	36.0	6.0	15.0	21.0	24.0
21AT5/22-2	22	6F	35.0	33.9	38.0	6.0	15.0	21.0	25.0
21AT5/24-2	24	6F	38.2	37.0	42.0	6.0	15.0	21.0	26.0
21AT5/25-2	25	6F	39.8	38.6	44.0	6.0	15.0	21.0	26.0
21AT5/26-2	26	6F	41.4	40.2	44.0	6.0	15.0	21.0	26.0
21AT5/27-2	27	6F	43.0	41.8	48.0	8.0	15.0	21.0	30.0
21AT5/30-2	30	6F	47.8	46.6	51.0	8.0	15.0	21.0	34.0
21AT5/32-2	32	6F	50.9	49.7	54.0	8.0	15.0	21.0	38.0
21AT5/36-2	36	6F	57.3	56.1	63.0	8.0	15.0	21.0	38.0
21AT5/40-2	40	6F	63.7	62.5	66.0	8.0	15.0	21.0	40.0
21AT5/44-0	44	6	70.0	68.8	-	8.0	15.0	21.0	50.0
21AT5/48-0	48	6	76.4	75.2	-	8.0	15.0	21.0	50.0
21AT5/60-0	60	6	95.5	94.3	-	8.0	15.0	21.0	65.0

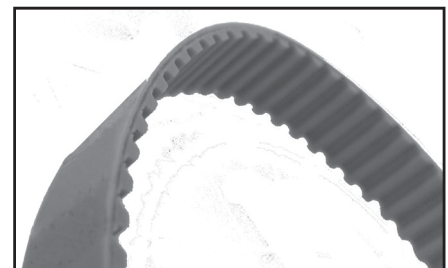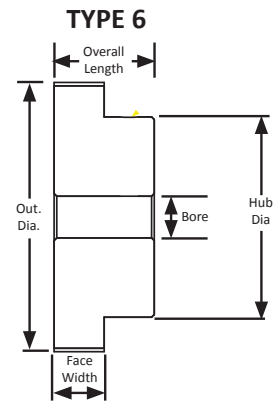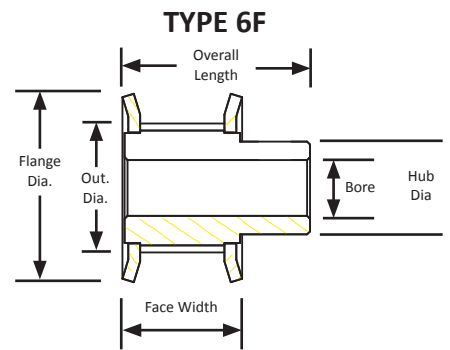

For matching AT5 pitch belts, see page 211.

The AT5 pitch is a metric pitch tooth profile and is trapezoidal in shape. Trapezoidal pitch timing belt pulleys are the most commonly used timing pulley profiles in the industry. They are precision manufactured and designed to produce a positive, press fit to a shaft with little sprocket wobble.

AT5 pitch pulley part numbers can tell you a great deal about the pulley including the number of teeth, pitch, overall length, and number of flanges.

For more information on part numbers and their meaning, see page 441.