

AT5 TIMING PULLEYS

METRIC TIMING PULLEY

5 mm Pitch

For 16 mm Wide Belts




Hub

Zinc Plated Steel Flanges


Aluminum



Part Number	No. of Teeth	Type	Pitch Dia. (mm)	Out. Dia. (mm)	Flange Dia. (mm)	Bore (mm)	Face Width (mm)	Overall Length (mm)	Hub Dia. (mm)
27AT5/12-2	12	6F	19.1	17.9	23.0	-	21.0	27.0	12.0
27AT5/14-2	14	6F	22.3	21.0	25.0	-	21.0	27.0	14.0
27AT5/15-2	15	6F	23.9	22.7	28.0	6.0	21.0	27.0	16.0
27AT5/16-2	16	6F	25.5	24.2	32.0	6.0	21.0	27.0	18.0
27AT5/18-2	18	6F	28.7	27.4	32.0	6.0	21.0	27.0	20.0
27AT5/20-2	20	6F	31.8	30.6	36.0	6.0	21.0	27.0	24.0
27AT5/22-2	22	6F	35.0	33.9	38.0	6.0	21.0	27.0	25.0
27AT5/24-2	24	6F	38.2	37.0	42.0	6.0	21.0	27.0	26.0
27AT5/25-2	25	6F	39.8	38.6	44.0	6.0	21.0	27.0	26.0
27AT5/26-2	26	6F	41.4	40.2	44.0	6.0	21.0	27.0	26.0
27AT5/27-2	27	6F	43.0	41.8	48.0	8.0	21.0	27.0	30.0
27AT5/30-2	30	6F	47.8	46.6	51.0	8.0	21.0	27.0	34.0
27AT5/32-2	32	6F	50.9	49.7	54.0	8.0	21.0	27.0	38.0
27AT5/36-2	36	6F	57.3	56.0	63.0	8.0	21.0	27.0	38.0
27AT5/40-2	40	6F	63.7	62.5	66.0	8.0	21.0	27.0	40.0
27AT5/44-0	44	6	70.0	68.8	-	8.0	21.0	27.0	50.0
27AT5/48-0	48	6	76.4	75.2	-	8.0	21.0	27.0	50.0
27AT5/60-0	60	6	95.5	94.3	-	8.0	21.0	27.0	65.0

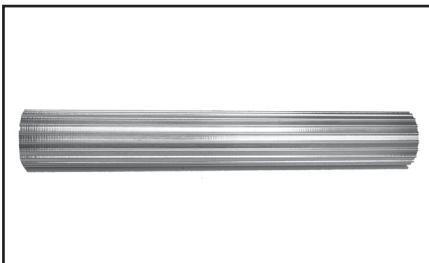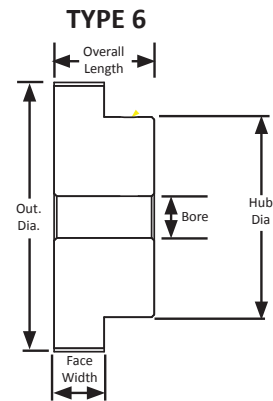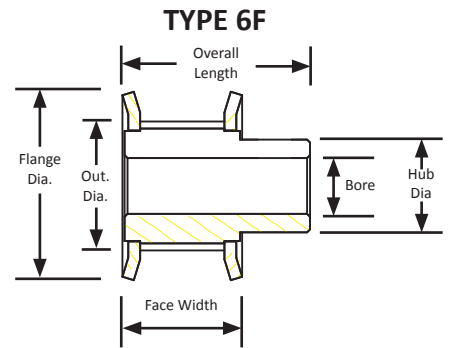

For AT5 pitch pulley stock and flanges, see page 365.

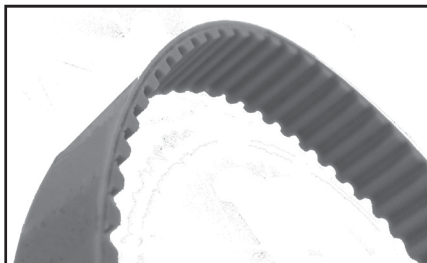

For matching AT5 pitch belts, see page 211.

B&B Manufacturing is proud to be a sponsor for the annual FIRST® Robotics Competition. We hope to inspire the next generation of science and technology leaders to build their skill sets in engineering, math, science, and technology.