

HVF. Visual flow indicators

Technopolymer ends



- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10
- 11
- 12
- 13
- 14
- 15
- 16
- 17
- 18

ENDS

Polypropylene based (PP) technopolymer, black colour, matte finish.

AXIS AND ROTOR PROPELLER

Polypropylene based (PP) technopolymer, red colour.

TUBULAR WINDOW

Borosilicate glass, high-resistance, also suitable for use with glycol-based solutions.

Maximum visibility of the flow from all angles.

TIE RODS

AISI 316L stainless steel.

STANDARD EXECUTIONS

Cylindrical gas thread according to UNI ISO 228/1.

- **HVF.**: brass bosses and NBR synthetic rubber gasket.

- **HVF-SST**: AISI 316 stainless steel bosses and packing ring in VITON®*.

MAXIMUM CONTINUOUS WORKING TEMPERATURE

100° C.

FEATURES AND APPLICATIONS

The indicator can be mounted in any position.

In case of mounting on rigid tubes, it is recommended to place the indicator perfectly aligned with the tubes.

The indicator operates with two-way liquid flows.

For rotating the propeller it is required a minimum fluid flow rate (Q**) depending on the type of fluid and its viscosity (shown in cSt, see table)




SPECIAL EXECUTIONS ON REQUEST

- Bosses with NPT conical threads.
- Axis and rotor propeller in blue colour.

* Registered trademark by DuPont Dow Elastomers.

HVF. (G1/4 - G3/8 - G1/2) HVF-SST (G1/4 - G3/8 - G1/2)

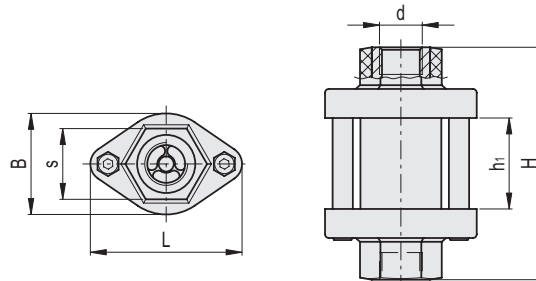

Conversion Table	
1 mm = 0.039 inch	
mm	inch
44	1.73
60	2.36
70	2.76

HVF. (G1/4 - G3/8 - G1/2)

BSP

METRIC

Code	Description	d	H	L	B	h1	s	Q max* l/min	P max # Bar	Q** l/min H2O	Q** l/min 0+40 cSt	Q** l/min 41+150 cSt	ΔP max ## Bar	⚖
111301	HVF.66-1/4	1/4	66	44	27	22	20	10	25	0.6	2.5	3.5	0.15	74
111311	HVF.92-3/8	3/8	92	60	40	36	28	20	15	1.2	3	4	0.25	176
111321	HVF.92-1/2	1/2	92	60	40	36	28	40	15	1.2	3	4	0.3	167

HVF-SST (G1/4 - G3/8 - G1/2)

BSP

INOX STAINLESS STEEL

METRIC

Code	Description	d	H	L	B	h1	s	Q max* l/min	P max # Bar	Q** l/min H2O	Q** l/min 0+40 cSt	Q** l/min 41+150 cSt	ΔP max ## Bar	⚖
111302	HVF.66-SST-1/4	1/4	66	44	27	22	20	10	25	0.6	2.5	3.5	0.15	74
111312	HVF.92-SST-3/8	3/8	92	60	40	36	28	20	15	1.2	3	4	0.25	176
111322	HVF.92-SST-1/2	1/2	92	60	40	36	28	40	15	1.2	3	4	0.3	167

* Maximum flow rate.

Maximum pressure


** Minimum flow rate to start the rotor for fluids of different viscosity

Pressure drop due to the indicator presence



Conversion Table	
1 mm = 0.039 inch	
L	
mm	inch
44	1.73
60	2.36
70	2.76

HVF. (G3/4 - G1)
HVF-SST (G3/4 - G1)

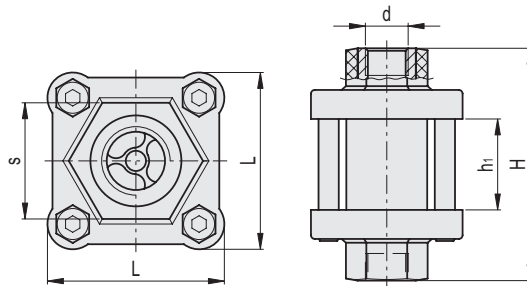

HVF. (G3/4 - G1)

BSP

METRIC

Code	Description	d	H	L	h1	s	Q max* l/min	P max # Bar	Q** l/min H2O	Q** l/min 0÷40 cSt	Q** l/min 41÷150 cSt	ΔP max ## Bar	⚖
111331	HVF.114-3/4	3/4	114	70	46	46	60	12	2.1	3.7	5	0.17	663
111341	HVF.114-1	1	114	70	46	46	80	12	2.1	3.7	5	0.15	667

HVF-SST (G3/4 - G1)

BSP

INOX STAINLESS STEEL

METRIC

Code	Description	d	H	L	h1	s	Q max* l/min	P max # Bar	Q** l/min H2O	Q** l/min 0÷40 cSt	Q** l/min 41÷150 cSt	ΔP max ## Bar	⚖
111332	HVF.114-SST-3/4	3/4	114	70	46	46	60	12	2.1	3.7	5	0.17	663
111342	HVF.114-SST-1	1	114	70	46	46	80	12	2.1	3.7	5	0.15	667

* Maximum flow rate.

Maximum pressure

** Minimum flow rate to start the rotor for fluids of different viscosity

Pressure drop due to the indicator presence