


DATE	REV	ECN	DESCRIPTION
5/23/2017	C		Added low temperature.

PRODUCT SPECIFICATION

Parent Number: F04064-

Description: 4 7x60/30 BC Excelene Welding Cable OD 0.420"

DIAMETER: 0.420
TOLERANCE ±: 0.010

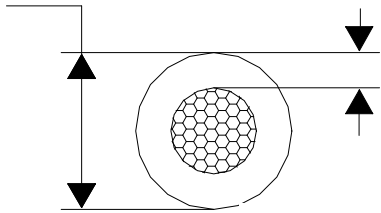

NOM WALL: 0.080
MINIMUM WALL: 0.072

Stranding: 7x60/30 BC LHL

Style: ExCelene Welding Cable

Insulation: EPDM

Print Legend: 4 COPPERFIELD EXCELENE® +105C -50C 600V WELDING CABLE MADE IN USA

Voltage: 600V

Temperature: -50C to +105C

- Notes:**
1. Separator is used between the copper conductor and insulation.
 2. Conductor complies with ASTM B 172

This product complies with European Directive 2011/65/EU (RoHS 2)

The information presented here is, to the best of our knowledge, true and accurate. Since conditions of use are beyond Southwire's control all product data presented is for informational purposes only and does not create a binding obligation or liability on Southwire or confer any rights on any customer. The sale of product(s) is conditioned upon acceptance of a purchase order subject to Southwire's standard terms and conditions contained therein, including without limitation Southwire's standard warranty. Southwire disclaims all liability in connection with the use of information contained herein or otherwise.

This specification is proprietary intellectual property of Southwire Company, LLC. Any information contained herein shall not be disclosed to any party without written consent of Southwire Company, LLC.

Customer Approval:

Customer Part Nbr(s): _____

Approved By: _____ **Date:** _____

Title: _____ **Company Name:** _____



Copperfield®

1115 W. North Street
 Bremen, IN 46506
 Phone: 1-574-546-5115