

# 2 Mil Double Sided Polyimide Tape

## PPTDE2 Series

### RoHS & REACH Compliant

2 Mil Double Sided Polyimide Tapes are made of 2 mil generic polyimide film with 1.5 mil of silicone adhesive coating on each side. They are packaged on a 36-yard-long roll with a PET liner on one side. These tapes offer an excellent performance in electrical and thermal insulation and have high dielectric strength. These tapes offer outstanding thermal endurance with excellent puncture and tear resistance.


### Applications

- 3D Printing and Aerospace Assembly
- Masking Circuit Boards and Coils
- Wafer Dicing Die Cutting, Optical, and Solar Panel Manufacturing

### Product Specifications <sup>(1)</sup>

Color	Amber	
Adhesion Type	Silicone	
Film Thickness	2 Mil	ASTM D-3652
Adhesive Thickness	1.5 Mil on each side	
Total Thickness	5 Mil	ASTM D-3652
Tensile Strength	50 lbs./in	ASTM D-3579
Liner	PET (Polyethylene)	
Dielectric Strength	10,000 volts	ASTM D-149
Operating Temperature	-73°C (-100°F) to 260°C (500°F)	
Length	36 Yards	
Adhesion to Steel	25 oz./in	ASTM D-3330
Core	3 in. Plastic Core	

<sup>(1)</sup> Specifications are subject to change at any time. If you have any questions, please contact us for the latest update.

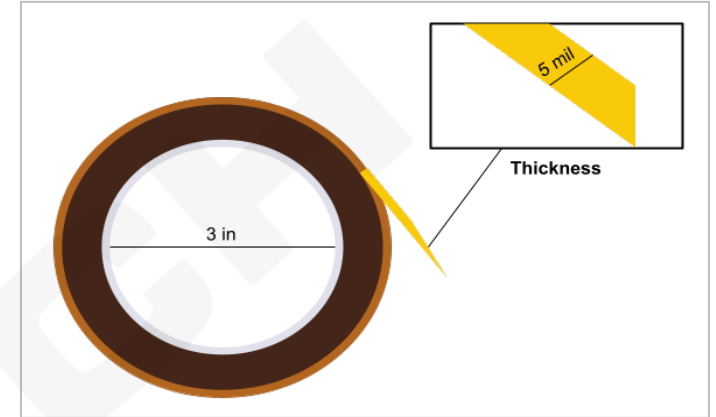

Bertech® makes no warranty, representation, or guarantee regarding the information contained herein or the suitability of its this product for any particular purpose, nor does Bertech® assume any liability whatsoever arising out of the application or use of this product. It is ultimately the responsibility of the customer to determine a product's suitability for a particular application.



**Bertech**  
640 Maple Ave  
Torrance, CA 90503  
Phone: (310) 787-0337  
Email: [sales@bertech.com](mailto:sales@bertech.com)  
[www.bertech.com](http://www.bertech.com)

**PRODUCT DATA SHEET**