

Double Sided Polyimide Tape with Double Liner

PPTDE2WL Series

RoHS & REACH Compliant

Double Sided Polyimide Tapes with Double Liner are made of 1 mil generic polyimide film with 1.5 mil of silicone adhesive coating on each side. They are packaged on a 36-yard-long roll with a PET liner on both sides. These tapes offer an excellent performance in electrical and thermal insulation and have high dielectric strength. They also offer outstanding thermal endurance with excellent puncture and tear resistance.


Applications

- 3D Printing and Aerospace Assembly
- Masking Circuit Boards and Coils
- Wafer Dicing Die Cutting, Optical, and Solar Panel Manufacturing

Product Specifications ⁽¹⁾

Color	Amber	
Adhesion Type	Silicone	
Film Thickness	1 Mil	ASTM D-3652
Adhesive Thickness	1.5 Mil on each side	
Total Thickness	4 Mil	ASTM D-3652
Tensile Strength	30 lbs./in	ASTM D-3759
Liner	PET (Polyethylene) on both sides	
Dielectric Strength	6,200 volts	ASTM D-149
Operating Temperature	-73°C (-100°F) to 260°C (500°F)	
Length	36 Yards	
Adhesion to Steel	25 oz./in	ASTM D-3330
Core	3 in. Plastic Core	

⁽¹⁾ Specifications are subject to change at any time. If you have any questions, please contact us for the latest update.

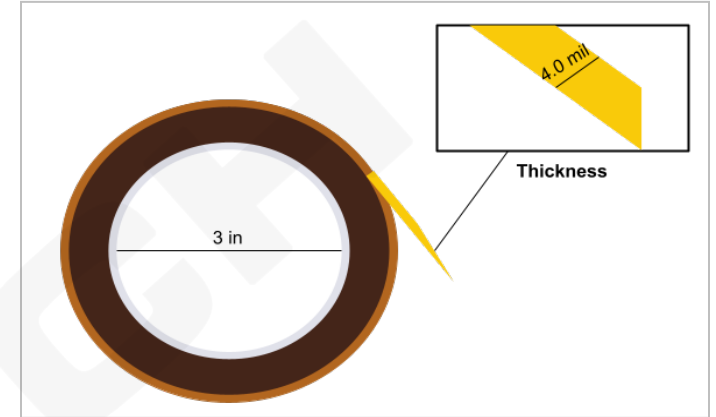

Bertech® makes no warranty, representation, or guarantee regarding the information contained herein or the suitability of its this product for any particular purpose, nor does Bertech® assume any liability whatsoever arising out of the application or use of this product. It is ultimately the responsibility of the customer to determine a product's suitability for a particular application.



Bertech
640 Maple Ave
Torrance, CA 90503
Phone: (310) 787-0337
Email: sales@bertech.com
www.bertech.com

PRODUCT DATA SHEET