


Indented Hex Washer Head - Type I (Phillips) - Combination Slted - A, AB



THREAD DATA		
Size: #12	Threads per in.: 14	Thread Class or Type: AB
Major Diameter: 0.2150 - 0.2080	Minor Dia Max/Min.: 0.164 - 0.157	Standard: ASME B18.6.3-2013
Length: 1-1/2	Length Tolerance: ± 0.05	
DIMENSIONAL DATA		
Type: Indented Hex Washer Head - Type I (Phillips) - Combination Slted - A, AB	Standard: ASME B18.6.3 - 2013	Nominal Diameter: 0.216
H - Head Height: 0.155 - 0.139	J - Slot Width: 0.067 - 0.056	T - Slot Depth: 0.103 - 0.072
Driver Size: 3	Penetration Depth: 0.152 - 0.127	Wobble: 10°
F - Protrusion Height: 0.083 Min	G - Gage Diameter: 0.34	A - Hex AF: 0.312 - 0.305
W - Hex AC: 0.340 Min	B - Washer Diameter: 0.432 - 0.398	U - Washer Thickness: 0.039 - 0.022
M - Ref. Recess Dim.: 0.247		
PHYSICAL REQUIREMENTS		
Nominal: 0.216	Standard: ASME B18.6.3-2013, Type AB (carbon steel)	Typical Materials: carbon steel: 1018-1022
Test Plate Thickness in.: 0.1270 - 0.1230	Test Plate Hole Size in.: 0.1875	Torsional Strength, Min. (in.lbf): 88
Core Hardness: HRC 28 - 38	Case Hardness: HRC 45 Min.	Case Depth (in.): .009-.004
Ductility Test Angle: 10°	Straightness Factor: N/A	
FINISH DATA		
Finish: Zinc & Clear, non-hexavalent/Cr(VI) free - .0001"/ 3µm	K factor (ref. DIN 946): 0.22	Standard: ASTM F1941/F1941M-2016, Fe/Zn 3AN

¹ These torque values are based on K factors determined using DIN 946, tightening tension of 75% of the yield strength, and the calculation formula $T=KDP$. These values are advisory only. The torque for assembling critical joints should be determined and/or verified through actual experimentation by the user. The IFI is not responsible for any losses or claims resulting from the use of these values.² Calculated Pretension is equal to 75% of the bolt's yield strength achieved when using the indicated Tightening Torque.

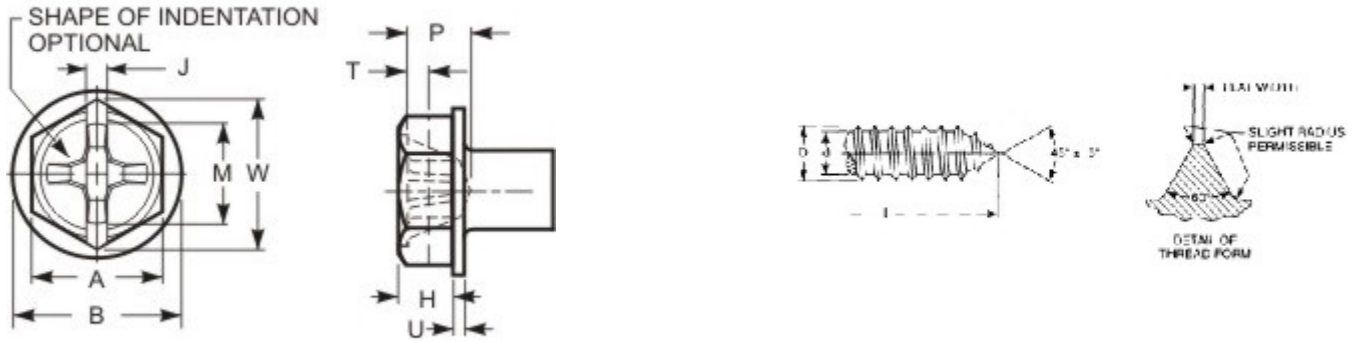