THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NUMBER	PACKAGE QUANTITY	MAXIMUM BUNDLE DIAMETER	LENGTH = "L" ±.2 [5]
MLT2DH-L	50	2.0" [50]	18.5" [470]
MLT4DH-L	50	4.0" [101]	28.0" [711]
MLT5DH-L	50	5.0" [127]	34.0" [863]
MLT6DH-Q	50	6.0" [152]	40.0" [1016]

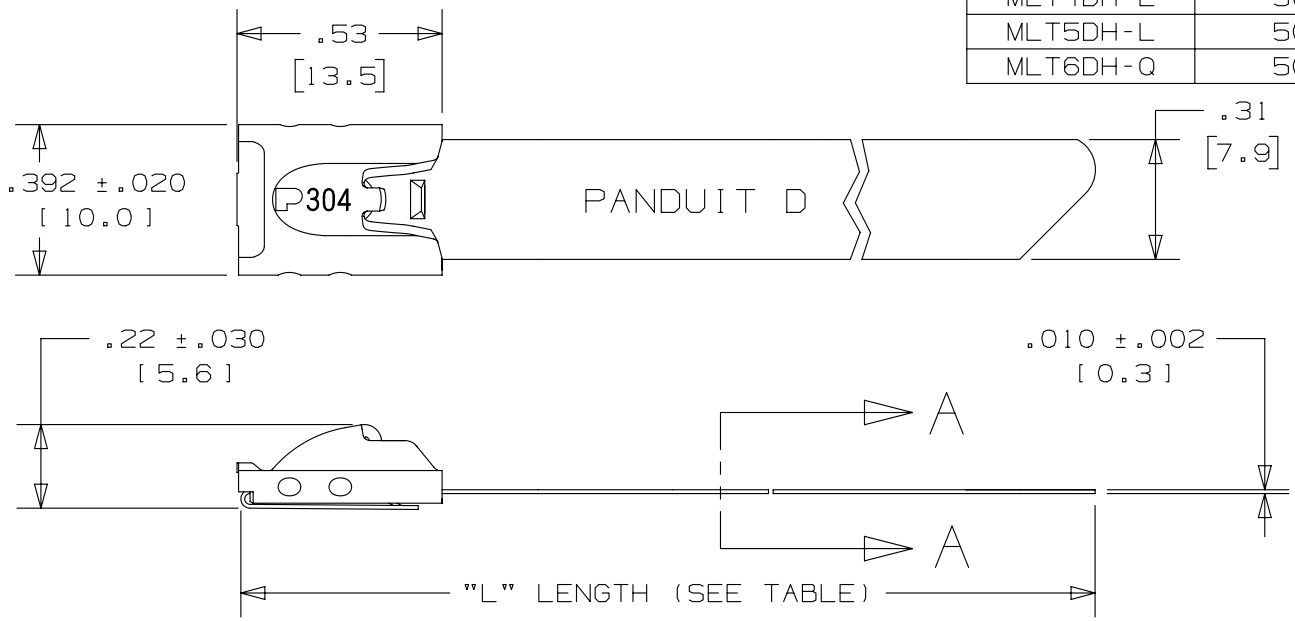

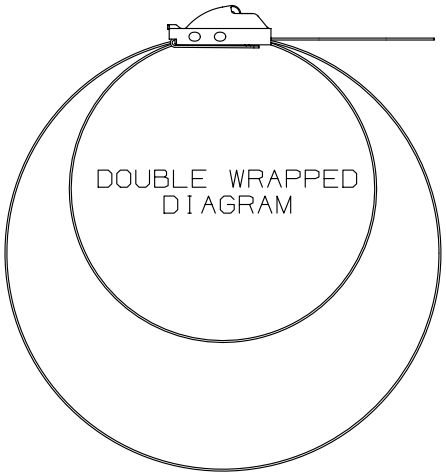

NOTES:
1. APPLICATION TOOLS - GS4MT, PPTMT, ST2MT, ST3MT, AND HTMT
2. MINIMUM LOOP TENSILE STRENGTH - 600 LBS. (2669 NEWTONS) WHEN TESTED ON A 1.5" MANDREL.
3. BRACKETS [ ] DENOTE DIMENSIONS IN MILLIMETERS, AND ARE SHOWN FOR REFERENCE ONLY
4. TOLERANCES:
   .XXX = ±.010 [.25] .XX = ±.02 [.5]
   .X = ±.03 [.8] ANGLES = ±2°
5. MATERIAL: 304 STAINLESS STEEL

BODY WRAPS AROUND TWO TIMES ENTERING HEAD TWICE (NOT TO SCALE)



REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
05A	3/13	JAMB	MIM	RGRO	UPDATE DRAWING TO NEW GLOBAL PANDUIT TITLE BLOCK WITH PANDUIT LOGO	SSECN01042
04A	2/12	MIM	RGRO	----	NOTE #3 METRIC DIMENSIONS NOTED AS BEING SHOWN FOR REFERENCE ONLY	-----

TITLE

DOUBLE WRAPPED METAL LOCKING TIE HEAVY SERIES

CUSTOMER DRAWING

ITEM REVISION NAME: N41142BS/05

DATASET FILE NAME: N41142BS/05

PANDUIT

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]
.X ± .1 [2.54] .XXX ± .005 [.127]
.XX ± .01 [.25] ANGLES ± 5 °
THIRD ANGLE PROJECTION

MATERIAL: 304 STAINLESS STEEL

DRAWING NUMBER: N41142BS_DC

DRAWN BY	DATE	CHK	SCALE	SHT 1 OF 1	SIZE
JAMB	2/12	DPN	2:1		A