



XTN4X

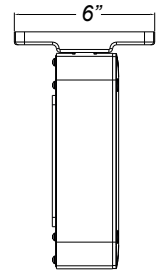

TECHNICAL SPECIFICATIONS:

- :: NEMA 4X Wet Location rated.
- :: UV stabilized polycarbonate housing and lens, 5VA flame rating
- :: Impact resistant housing with seamless silicon gasket
- :: Energy efficient LED panel, 3.2 watts (red) 3.8 watts (green), 25-year rated
- :: 120/277-volt
- :: Operating temperature: 68-122°F
- :: Universal canopy for side or top mount (for wall and ceiling installation)
- :: Easy snap-out left or right arrows
- :: 4.8V maintenance free Ni-Cad battery for long life
- :: Low profile compact design, available in white only
- :: 90-minute rated with push style test switch and red indicator light
- :: Top or back mount only—single face only
- :: Cold weather -4°F minimum operating temperature
- :: UL-listed for wet locations, meets UL924, NFPA 101 Life Safety Code
- :: 3-year warranty

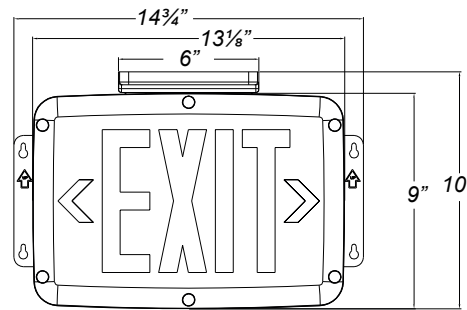

NEMA4X LED EXIT SIGN

CATALOG NO.	LETTERS	FACEPLATE	BODY	VOLTAGE	BATTERY
XTN4X-1RW	Red	Single Face	White	120/277	Ni-Cad
XTN4X-1RB	Red	Single Face	Black	120/277	Ni-Cad
XTN4X-1RG	Red	Single Face	Gray	120/277	Ni-Cad
XTN4X-1GW	Green	Single Face	White	120/277	Ni-Cad
XTN4X-1GB	Green	Single Face	Black	120/277	Ni-Cad
XTN4X-1GG	Green	Single Face	Gray	120/277	Ni-Cad
XTN4X-2RW	Red	Double Face	White	120/277	Ni-Cad
XTN4X-2RB	Red	Double Face	Black	120/277	Ni-Cad
XTN4X-2RG	Red	Double Face	Gray	120/277	Ni-Cad
XTN4X-2GW	Green	Double Face	White	120/277	Ni-Cad
XTN4X-2GB	Green	Double Face	Black	120/277	Ni-Cad
XTN4X-2GG	Green	Double Face	Gray	120/277	Ni-Cad

H11