

Mach<sup>®</sup> WAVE KOHLER, FAUCETS Touchless toilet flushometer, DC-powered, 1.28 gpf K-40TD00N10

#### Features

- 1.28 gpf (4.8 lpf)
- Activation distance is factory-set
- Chloramine and chlorine resistance on all rubber components exposed to waterway
- Engineered for optimal performance with KOHLER® commercial fixtures
- 125-micron filter protects internal components
- High back pressure vacuum breaker
- Locking stop cap provides protection against vandalism
- No external flush volume adjustment ensures water conservation
- 24-hour automatic sentinel flush keeps trapway fresh
- Mechanical override enables flushometer to be used manually even during a power outage
- Includes 1.5V AA alkaline batteries

### Material

Brass construction with durable Polished Chrome finish

### Technology

- Flushometer activates when hand is waved over electronic infrared WAVE sensor
- Patented piston technology for superior flush volume accuracy

### Installation

Intended for toilet installations with 1-1/2" (38 mm) top spud coupling connection

### **Recommended Products/Accessories**

K-23723 Faucet cleaner 1421939 Flushometer Arm Extension Kit 1509698 Pressure Gauge Kit, 1/8"

### **Optional Products/Accessories**

GP1118986 Flushometer Extension Kit K-10313 Flushometer 12" rough-in kit







## Codes/Standards

ASME A112.18.1/CSA B125.1 ASSE 1037/ASME A112.1037/CSA B125.37 EPA WaterSense® ADA ICC/ANSI A117.1 CSA B651 OBC

### **KOHLER® One-Year Limited** Warranty

See website for detailed warranty information.

## **Available Colors/Finishes**

Color tiles intended for reference only.


#### **Color Code Description**

CP Polished Chrome





# Mach® WAVE Touchless toilet flushometer, DC-powered, 1.28 gpf K-40TD00N10

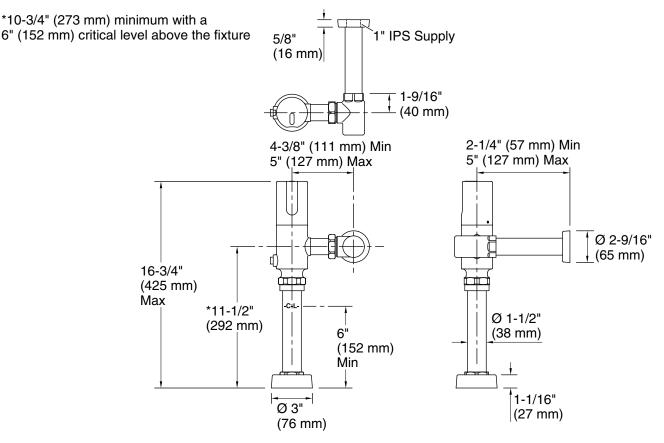

## **Technical Information**

All product dimensions are nominal.

### Pressure/fixture Supply Requirements

Fixture pressure max (static):	80 psi (551.6 kPa)
Fixture pressure min (static):	35 psi (241.3 kPa)
Min flowing pressure:	25 psi (172.4 kPa)
Min flow rate:	25 gpm (94.6 lpm)

#### Notes

Install this product according to the installation instructions.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

