

### Pitch® Rite-Temp<sup>®</sup> shower valve trim K-TS74042-4

#### Features

- Pressure-balancing diaphragm technology maintains outlet temperature within +/-3°F during water pressure fluctuations.
- Antiscald protection.
- A single handle controls both on/off activation and temperature setting.
- Includes faceplate with ADA-compliant metal level handle.
- For use with any KOHLER showerhead (sold separately).
- Coordinates with Hint<sup>™</sup> bathroom sink faucets and bath faucets.

#### Material

- Premium material construction with metal handle ensures reliability and durability.
- KOHLER finishes resist corrosion and tarnishing.

#### Installation

Trim only; requires valve to complete installation (sold separately).

#### **Required Products/Accessories**

K-8304 Series Rite-Temp® Valve & Cartridge Kits

or

K-8300 Series Rite-Temp® Valve Body Rough-ins K-8305 Series Rite-Temp® Cartridges

#### **Recommended Products/Accessories**

K-23723 Faucet cleaner

#### **Optional Products/Accessories**

K-10350 Deep rough-in kit K-10351 Test cap for K-8300 Series valve bodies 1307346 Retro mixer cap for K-304 Rite-Temp valve 1362395 Retro mixer cap for K-2971 HiFlow Rite-Temp valve





#### **Codes/Standards**

ASME A112.18.1/CSA B125.1 ADA ICC/ANSI A117.1 CSA B651 OBC

## KOHLER<sup>®</sup> Faucet Lifetime Limited Warranty

See website for detailed warranty information.

#### **Available Colors/Finishes**

Color tiles intended for reference only.

Color Code Description


- ł.
- CP Polished Chrome
- BN Vibrant® Brushed Nickel

BL Matte Black

2MB Vibrant® Brushed Moderne Brass

# KOHLER, Faucets

Pitch® Rite-Temp® shower valve trim K-TS74042-4

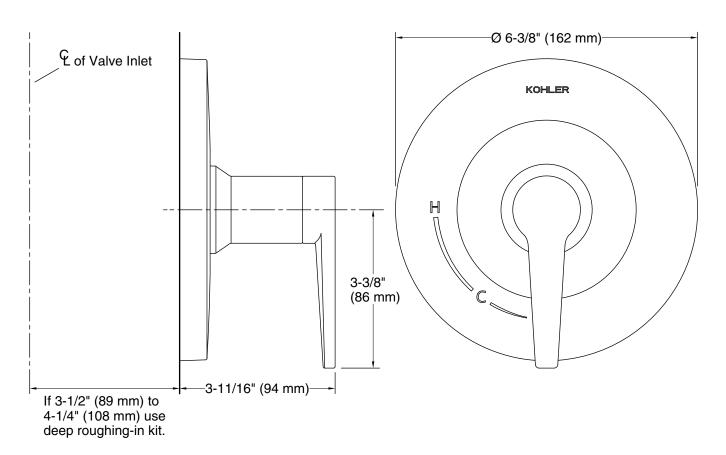

#### **Technical Information**

All product dimensions are nominal.

Drain included: No

#### Showerhead/Body Spray:

Rated maximum 1.75 gal/min (6.6 l/min) flow: Pressure: 80 psi (5.5 bar)

#### Notes

Install this product according to the installation instructions.

Install straight pipe or tube drop of 7" (178 mm) to 18" (457 mm) with single elbow between the valve and the wall-mount spout.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

