


| | |
|--|---|
| Type of Appliance | Condensing, Tankless, Temperature controlled, continuous flow, gas hot water system, Energy Star Qualified |
| Rinnai model number | REU-KCM2025W-US |
| Operation / Installation | Forced combustion; outdoor only; Certified for installation in Manufactured (Mobile) Homes |
| Minimum/Maximum Gas Rate (Input) | 10,300 - 130,000 BTU/h |
| Electrical | Appliance: AC 120 Volts - 60 Hz Temperature Controller: DC 12 Volts |
| Electrical Consumption | Normal: 61 w Standby: 1.3 w Anti-frost protection: 140 w |
| Amperage | Max: 2.3A Fuse: 10A |
| Ignition System | Direct electronic ignition |
| Hot Water Capacity | Minimum flow rate: 0.26 GPM (1 l/min) Minimum activation flow rate: 0.4 GPM (1 l/min) Maximum flow rate: 6.5 GPM (24.6 l/min) |
| Temperature (with remote) | 120° - 140° F (49° - 60°C) |
| Temperature (without remote) | 120° F (49°C), 125° F (49°C), 135° F (57°C), or 140° F (60°C) |
| Approved Gas Types | Natural or Propane (ensure unit matches gas type) |
| Uniform Energy Factor (UEF) | 0.90 |
| Service Connections | Gas supply: 3/4 inch (19mm) MNPT Cold water inlet: 3/4 inch (19mm) MNPT Hot water outlet: 3/4 inch (19mm) MNPT |
| Water Flow Control | Water flow sensor, electronic water control and fixed by-pass |
| Minimum/Maximum Water Supply Pressure | 50 - 150 PSI (345-1035 KPa) (recommended 60 - 80 PSI (414 - 552 KPa) for optimal performance) |
| High Altitude Capability | Up to 5,400 ft (1646 m) elevation above sea level |

Rinnai is continually updating and improving products; therefore, specifications are subject to change without prior notice. Local, state, provincial and federal codes must be adhered to prior to installation.

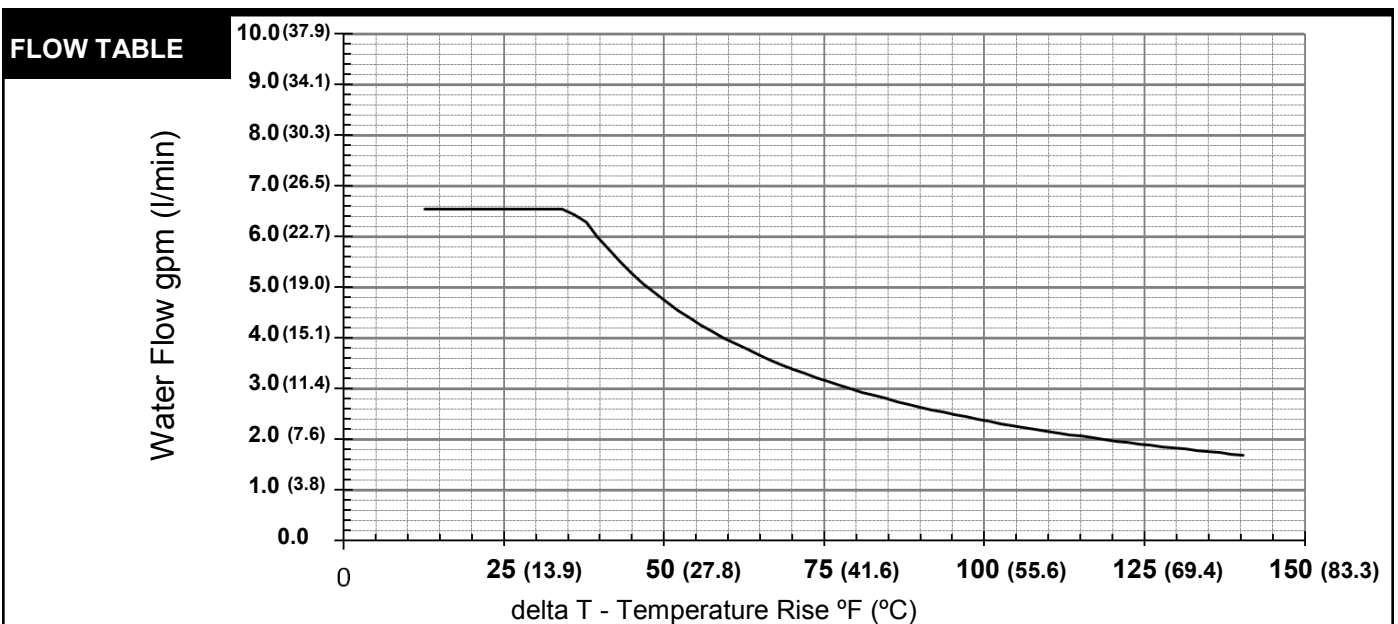

Controller (Optional)

MC-91-2US (optional maximum of 4 can be installed)
Do not install MC-100V-1US or BC-100V-1US

Controller Cable

Non-polarized two-core cable, minimum 22 AWG

Safety Devices

- Flame failure - Flame Rod
- Boiling protection
- Combustion fan rpm check
- Over current - glass fuse
- Remaining flame (OHS)
- Thermal fuse
- Automatic frost protection

Clearances from Combustibles

- Top of heater - 12 inches (305mm)
- Front (Panel) - 24 inches (610mm)
- Front (Exhaust) - 24 inches (610mm)
- Back of heater - 0 inches
- Bottom of heater - 12 inches (305mm)
- Sides of heater - 6 inches (152mm)

Clearances from Non-combustibles

* 24 inches (610mm) required for service

- Top of heater - 2 inches (51mm)
- Front (Panel) - 0 inches *
- Front (Exhaust) - 24 inches (610mm)
- Back of heater - 0 inches
- Bottom of heater - 2 inches (51mm)
- Sides of heater - 1/8 inch (3.2mm)

Min. / Max. Gas Supply Pressure

Natural Gas: min 4" W.C. (2.5mbar) max 10.5" W.C. (26.1mbar)
Propane Gas: min 8" W.C. (20mbar) max 13.5" W.C. (33.6mbar)

Manifold Gas Pressure (inches W.C.)

Natural Gas: high fire 2.02" W.C. (5.0mbar) low fire 0.89" W.C. (2.2mbar)
Propane Gas: high fire 2.32" W.C. (5.8mbar) low fire 0.96" W.C. (2.4mbar)

NOx

Complies with South Coast Air Quality Management District 14 ng/J or 20 ppm NOx emission levels

Limited Warranty

Heat exchanger: 12 years* for residential, All other parts: 5 years*; Labor: 1 year;
(* 3 years if used as a circulating water heater within a circulation loop, when the water heater is in series with a circulation system and all circulating water flows through the water heater, and where an aquastat / thermostat, timer, or an on-demand recirculation system is not incorporated.)
Refer to the manual for complete warranty information.

