Halsey Taylor. SPECIFICATIONS

# Halsey Taylor Wall Mount GreenSpec ADA Cooler Filtered 8 GPH Stainless Model HACG8SS-WF

## PRODUCT SPECIFICATIONS

Halsey Taylor Wall Mount GreenSpec ADA Cooler, Filtered 8 GPH Stainless. Chilling Capacity of 8.0 GPH (gallons per hour) of 50° F drinking water, based on 80° F inlet water and 90° F ambient, per ASHRAE 18 testing. Features shall include Energy Savings, Filtered. Furnished with Double Bubbler ™. Mechanical Front and Side Bubbler Pushbar activation. Product shall be Wall Mount (On Wall), for Indoor applications, serving 1 station(s). Unit shall be certified to UL 399 and CAN/CSA C22.2 No. 120.

Special Features:	Energy Savings, Filtered	
Finish:	Stainless Steel	
Power:	115V/60Hz	
Bubbler Style:	Double Bubbler ™	
Activation by:	Mechanical Front and Side Bubbler	
	Pushbar	
Mounting Type:	Wall Mount (On Wall)	
Chilling Capacity*:	8.0 GPH	
Full Load Amps	5	
Dimensions (L x W x H):	18" x 18-5/8" x 20-5/8"	
Approx. Shipping Weight:	61 lbs.	
Installation Location:	Indoor	
No. of Stations Served:	1	
*Based on 80° F inlet water & 90° F ambient air temp for 50° F chilled		

Based on 80° F inlet water & 90° F ambient air temp for 50° F chilled drinking water.

- Mechanically-Activated bubbler continues to supply water in event of service disruptions.
- Filter is certified to NSF 42 and 53 for lead, particulate, chlorine, taste and odor reduction. 1,500 gal. capacity.
- Energy-Savings Feature allowing for the refrigeration to be powered off when not in use.
- Exclusive Double Bubbler which projects two separate streams that converge to form a fuller, more satisfying drink.

#### **COOLING SYSTEM**

- Compressor: Hermetically-sealed, reciprocating type, single phase. Sealed-in lifetime lubrication.
- Condenser: Fan cooled, copper tube with aluminum fins. Fan motor is permanently lubricated.
- Cooling Unit: Combination tube-tank type. Continuous copper tubing with is fully insulated with EPS foam that meets UL requirements for self-extinguishing material.
- Refrigerant Control: Refrigerant R-134a is controlled by accurately calibrated capillary tube.
- Temperature Control: Easily accessible enclosed adjustable thermostat is factory preset. Requires no adjustment other than for altitude requirements.

PART:	_QTY:
PROJECT:	
CONTACT:	
DATE:	
NOTES:	
APPROVAL:	



### Included with Product:

Water Cooler. Filter

#### Ships in one box.

AMERICAN PRIDE. A LIFETIME TRADITION. Like your family, the Elkay family has values and traditions that endure. For almost a century, Elkay has been a family-owned and operated company, providing thousands of jobs that support our families and communities.

## PRODUCT COMPLIANCE

ADA & ICC A117.1

ASME A112.19.3/CSA B45.4

**Buy American Act** 

CAN/CSA C22.2 No. 120

NSF/ANSI 42, 53, 61, & 372 (lead free)

UL 399






Complies with ADA & ICC A117.1 accessibility requirements when installed according to the requirements outlined in these standards. Installation may require additional components and/or construction features to be fully compliant. Consult the local Authority Having Jurisdiction if necessary. Installation Instructions (PDF) - 0000000559

5 Year Limited Warranty on the refrigeration system of the unit. Electrical components and water system are warranted for 12 months from date of installation. Warranty pertains to drinking water applications only. Non-drinking water applications are not covered under warranty.

Warranty (PDF)





# Halsey Taylor. SPECIFICATIONS


# Halsey Taylor Wall Mount GreenSpec ADA Cooler Filtered 8 GPH Stainless **Model HACG8SS-WF**

Optional Accessories		
<u>55897C</u>	Halsey Taylor WaterSentry VII Replacement Filter (Coolers + Fountains) Spec Sheet (PDF)	NO IMAGE AVAILABLE
<u>MLP100</u>	In-wall Carrier for Single-station On-wall Bottle Fillers Coolers & Fountains Spec Sheet (PDF)	Ĭ
<u>98324C</u>	Cane Apron for HAC HVR EMABF & VRC Models (Stainless) Spec Sheet (PDF)	
<u>96852CA</u>	Halsey Taylor Gooseneck Glass Filler Kit Spec Sheet (PDF)	

In keeping with our policy of continuing product improvement, Halsey Taylor reserves the right to change product specifications without notice. Please visit Halseytaylor.com for the most current version of Halsey Taylor product specification sheets. This specification describes a Halsey Taylor product with design, quality, and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.

Halsey Taylor. **SPECIFICATIONS** 

## Halsey Taylor Wall Mount GreenSpec ADA Cooler Filtered 8 GPH Stainless Model HACG8SS-WF

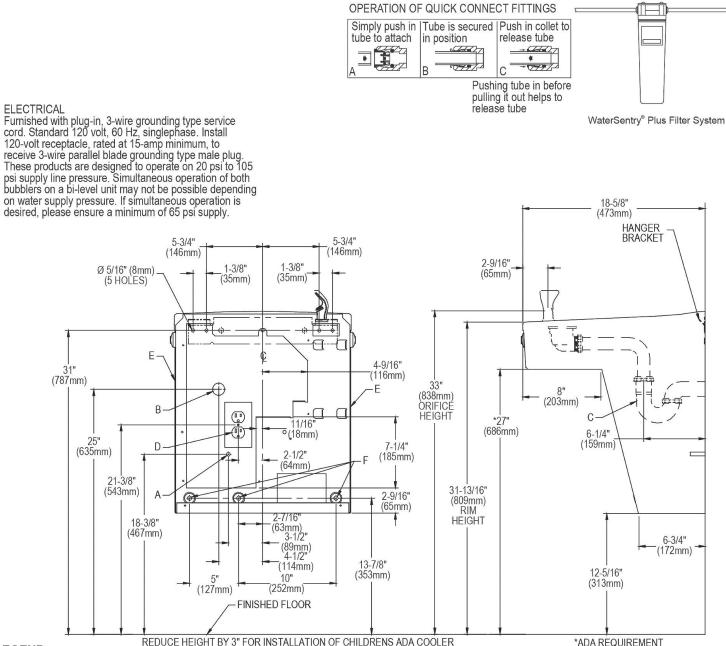

#### LEGEND:

A: Recommended water supply location, 3/8" O.D. unplated copper tube connect stub 1-1/2" (38mm) out from wall shut off valve by others not furnished B: Recommended location for waste outlet, 1-1/4" O.D. drain.

C 1-1/4" Trap not furnished.

D: Electrical supply (3) wire recessed box

Insure proper ventilation by maintaining 6" (152mm) min. clearance from cabinet louvers to wall E

F: 7/16" Bolt holes for fastening unit ti wall. Note : New Installations Must Use Ground Fault Circuit Interrupter (GFCI). It is highly recommended that the circuit be dedicated and the load protection be sized for 20 amps.

In keeping with our policy of continuing product improvement, Halsey Taylor reserves the right to change product specifications without notice. Please visit Halseytaylor.com for the most current version of Halsey Taylor product specification sheets. This specification describes a Halsey Taylor product with design, guality, and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.