
\*\*\* ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE \*\*\* ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON.

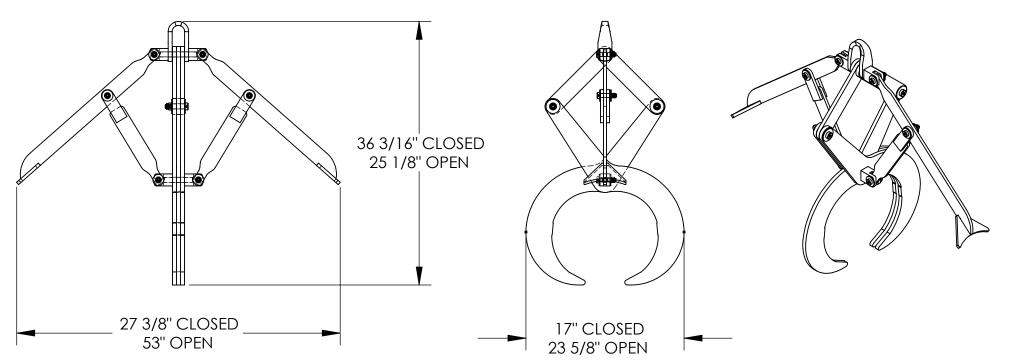

FAB.

POWER

## DIMENSION TOLERANCE ± 1/4"

28-007-164-002

I, THE UNDERSIGNED, AGREE THAT THE PRODUCT AS REPRESENTED SATISFIES DESIGN AND DIMENSION

REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO

QUOTE #

## STANDARD FEATURES

**MODEL NUMBER IS PG-S-200** CAPACITY: 2.000 LBS. UNIT IS FOR 10.75" - 11.10" O.D. STEEL PIPE/TUBE TOUGH BAKED IN POWDER COATED YELLOW FINISH

NOTE: OVERALL DIMENSIONS GIVEN IS THE MAX/MIN FOR

## SPECIAL FEATURES **NONE**

EACH VALUE		CONFIRM PRODUCT AND INSTALLATION COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE AND LOCAL REGULATIONS AND STANDARDS.  ANY MODIFIED UNITS ARE NON-RETURNABLE  [ ] As drawn [ ] As marked			
		Signed:Printed Name:	ON DECEM		Date:
		LEAD TIME WILL START UPON RECEIPT OF SIGNED APPROVAL DRAWING			
FOR INTERNAL USE ONLY PROJECT SIGN OFF	DISTR	RIBUTOR'S NAME:		P.O.# X W.O.#	
SALES		'ESTIL MANUFAC	νν.Ο.# X		
ENG.		<sup>WN BY:</sup> SR	9/25/2006		SALES: X
FAB.	REFE	RENCE: X		SCALE: 1:12	FILE NAME:

Α

QUOTED LEAD TIME: X