

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** **0430202010**

**Status:** **Active**

**Overview:**

**Description:** Micro-Fit 3.0 Plug Housing, Dual Row, 20 Circuits, UL 94V-2, Panel Mount Ears, Glow-Wire Capable, Black

**Documents:**

<a href="#">Drawing (PDF)</a>	<a href="#">Test Summary 430450005-TS-000 (PDF)</a>
<a href="#">3D Model</a>	<a href="#">Test Summary 430450006-TS-000 (PDF)</a>
<a href="#">3D Model (PDF)</a>	<a href="#">Test Summary TS-43045-001-001 (PDF)</a>
<a href="#">Product Specification 430450001-PS-KO-000 (PDF)</a>	<a href="#">Test Summary TS-43045-003-001 (PDF)</a>
<a href="#">Product Specification 430450001-PS-SP-000 (PDF)</a>	<a href="#">Test Summary TS-46235-001-001 (PDF)</a>
<a href="#">Product Specification PS-43045-001 (PDF)</a>	<a href="#">Datasheet (PDF)</a>
<a href="#">Packaging Specification PK-43020-001-001 (PDF)</a>	<a href="#">RoHS Certificate of Compliance (PDF)</a>

**Agency Certification**


CSA LR19980

**General**

Product Family Crimp Housings  
 Series [43020](#)  
 Application Power, Wire-to-Wire  
 Comments This Molex product is manufactured from material that has the following ratings, tested by independent agencies: a) A Glow Wire Ignition Temperature (GWIT) of at least 775 deg C per IEC 60695-2-13. b) A Glow Wire Flammability Index (GWFI) above 850 deg C per IEC 60695-2-12 and hence complies with the requirements set out in the International Standard IEC 60335-1 5th edition - household and similar electrical appliances - safety, section 30 Resistance to heat and fire. The customers using this product must determine its suitability for use in their particular application through testing or other acceptable means as described in end-product glow-wire flammability test standard IEC 60695-2-11 and any applicable product end-use standard(s). If it is determined during the customer's evaluation of suitability, that higher performance is required, please contact Molex for possible product options.  
 Overview [microfit\\_30](#)  
 Product Name Micro-Fit 3.0  
 Taxonomy Connector Housings  
 UPC 889056719896

**Physical**

Circuits (maximum) 20  
 Color - Resin Black  
 Flammability 94V-0  
 Gender Plug  
 Glow-Wire Capable Yes  
 Keying to Mating Part None  
 Lock to Mating Part Yes  
 Material - Resin Nylon  
 Net Weight 2.415/g  
 Number of Rows 2  
 Packaging Type Bag

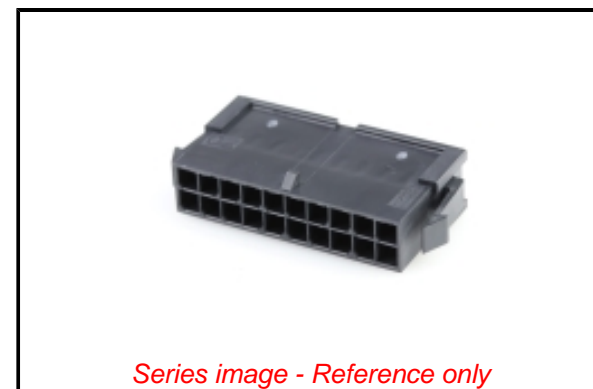

Series image - Reference only

**EU ELV**

**Not Relevant**

**EU RoHS**

**Compliant**

**REACH SVHC**

Not Contained Per -  
 D(2022)4187-DC (10  
 June 2022)

**Halogen-Free**

**Status**

**Not Low-Halogen**

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

**China RoHS**

Green Image

Not Relevant

Not Contained

**Search Parts in this Series**

[43020](#) Series

**Mates With**

Micro-Fit 3.0 Receptacle Housings [43025](#)

**Use With**

Micro-Fit 3.0 Crimp Terminals [43031](#) <br>  
 Micro-Fit 3.0 Pre-Crimped Lead [214762](#) ,  
[214763](#)

Panel Mount	Yes
Pitch - Mating Interface	3.00mm
Pitch - Termination Interface	3.00mm
Polarized to Mating Part	Yes
Stackable	No
Temperature Range - Operating	-40° to +125°C

**Material Info**

**Reference - Drawing Numbers**

Packaging Specification	PK-43020-001-001
Product Specification	430450001-PS-KO-000, 430450001-PS-SP-000, PS-43045-001
Sales Drawing	SD-43020-002-001
Test Summary	430450005-TS-000, 430450006-TS-000, TS-43045-001-001, TS-43045-003-001, TS-46235-001-001

This document was generated on 10/10/2022

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**