


PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0879140204](#)
Status: **Active**
Overview: C-Grid Connector Products
Description: 2.54mm Pitch C-Grid Header, Through Hole, Dual Row, Vertical, 0.38µm Gold (Au) Selective Plating, 2 Circuits, Tray Packaging, Lead-Free

Documents:

Drawing (PDF)	Test Summary 879200000-TS-000 (PDF)
Product Specification PS-87920-019-001 (PDF)	Test Summary 879200001-TS-000 (PDF)
Application Specification 713080001-AS-000 (PDF)	RoHS Certificate of Compliance (PDF)
Packaging Specification PK-89990-489-001 (PDF)	

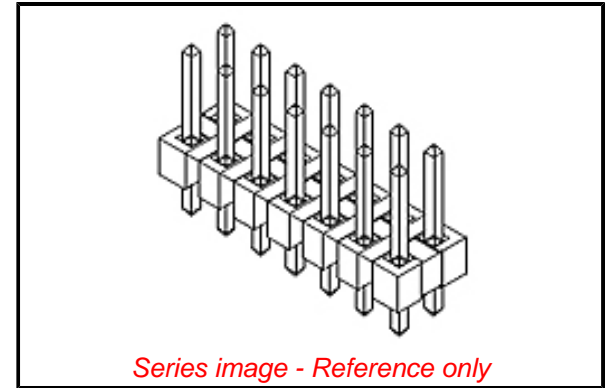

Agency Certification

UL E29179

General

Product Family	PCB Headers
Series	87914
Application	Board-to-Board, Signal, Wire-to-Board
Overview	C-Grid Connector Products
Product Name	C-Grid
Taxonomy	PCB Headers and Receptacles
UPC	822350649728

Physical

Breakaway	Yes
Circuits (Loaded)	2
Circuits (maximum)	2
Color - Resin	Black
First Mate / Last Break	No
Flammability	94V-0
Glow-Wire Capable	No
Guide to Mating Part	No
Keying to Mating Part	None
Lock to Mating Part	None
Mated Height	6.10mm
Material - Metal	Copper Alloy
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	0.113/g
Number of Rows	2
Orientation	Vertical
PC Tail Length	2.72mm
PCB Locator	No
PCB Retention	None
PCB Thickness - Recommended	1.60mm
Packaging Type	Tray
Pitch - Mating Interface	2.54mm
Pitch - Termination Interface	2.54mm
Plating min - Mating	0.381µm
Plating min - Termination	1.905µm
Polarized to Mating Part	No
Polarized to PCB	No
Shrouded	No
Stackable	No
Surface Mount Compatible (SMC)	Yes

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per -
D(2022)4187-DC (10
June 2022)

Halogen-Free

Status

Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

China RoHS

Green Image

Not Relevant

Not Contained

Search Parts in this Series

[87914 Series](#)

Mates With

[7859](#) Shunts, [71850](#) C-Grid PCB Receptacles, [70450](#) SL IDT Housing

Temperature Range - Operating	-55° to +105°C
Termination Interface: Style	Through Hole

Electrical

Current - Maximum per Contact	3.0A
Voltage - Maximum	250V

Solder Process Data

Duration at Max. Process Temperature (seconds)	012
Lead-free Process Capability	WAVE
Max. Cycles at Max. Process Temperature	001
Process Temperature max. C	260

Material Info**Reference - Drawing Numbers**

Application Specification	713080001-AS-000
Packaging Specification	PK-89990-489-001
Product Specification	PS-87920-019-001
Sales Drawing	SD-87914-013-000
Test Summary	879200000-TS-000, 879200001-TS-000

This document was generated on 10/19/2022

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION