

### FASTON | FASTON 205

TE Internal #: 1217080-1


PCB Terminals, Receptacle, Mating Tab Width .25 in / .205 in [6.35 mm / 5.21 mm], PCB Hole Diameter 1.4 mm [.055 in], FASTON 205


View on TE.com >



Terminals & Splices > PCB Terminals











PCB Terminal Type: Receptacle

PCB Thickness (Recommended): 1.57 mm [ .062 in ]

Mating Tab Width: 5.21 mm, 6.35 mm [ .205 in, .25 in ]

Mating Tab Thickness: .64 mm, .8 mm [ .025 in, .031 in ]

PCB Hole Diameter: 1.4 mm [.055 in]

### **Features**

## Product Type Features

| Insertion Force               | Low                               |
|-------------------------------|-----------------------------------|
| Configuration Features        |                                   |
| Connection Capacity           | Single                            |
| Stud Hole                     | No                                |
| Terminal Angle                | 180 °                             |
| Body Features                 |                                   |
| Plating Thickness             | 2.54 μm[100 μin]                  |
| Contact Features              |                                   |
| Contact Plating Material      | Tin                               |
| PCB Terminal Type             | Receptacle                        |
| Mating Tab Width              | 5.21 mm, 6.35 mm[.205 in][.25 in] |
| Mating Tab Thickness          | .64 mm, .8 mm[.025 in][.031 in]   |
| Terminal Plating Material     | Tin                               |
| Contact Underplating Material | Copper, Nickel                    |



| Terminal Size                               | 5.2, 6.35                  |
|---|----------------------------|
| Terminal Orientation                        | Straight                   |
| Termination Features                        |                            |
| Termination Method to Printed Circuit Board | Through Hole - Solder      |
| Product Terminates To                       | Printed Circuit Board      |
| Mechanical Attachment                       |                            |
| Wire Insulation Support                     | Without                    |
| Dimensions                                  |                            |
| Extension Below Board                       | 3.81 mm[.15 in]            |
| Receptacle Terminal Stock Thickness         | .41 mm[.016 in]            |
| PCB Thickness (Recommended)                 | 1.57 mm[.062 in]           |
| PCB Hole Diameter                           | 1.4 mm[.055 in]            |
| Profile Height from PCB                     | 8.38 mm[.334 in]           |
| Usage Conditions                            |                            |
| Insulation Option                           | Uninsulated                |
| Operating Temperature Range                 | -40 - 105 °C[-40 - 221 °F] |
| Packaging Features                          |                            |
| Packaging Quantity                          | 1000                       |
| Packaging Method                            | Bag                        |
| Other                                       |                            |
|   |                            |

# **Product Compliance**

Line

For compliance documentation, visit the product page on TE.com>

| EU RoHS Directive 2011/65/EU                  | Compliant   |
|---|---|
| EU ELV Directive 2000/53/EC                   | Compliant   |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold   |
| EU REACH Regulation (EC) No. 1907/2006        | Current ECHA Candidate List: JUNE 2022<br>(224)<br>Candidate List Declared Against: JUNE<br>2022 (224)<br>Does not contain REACH SVHC |
| Halogen Content                               | Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC  |

Budget



#### Free

### Solder Process Capability

Wave solder capable to 240°C

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-onreach

# Compatible Parts



TE Part # 63969-1 FASTON 205/250 PCB MOUNTED **TPBR** 




















## Also in the Series | FASTON 205

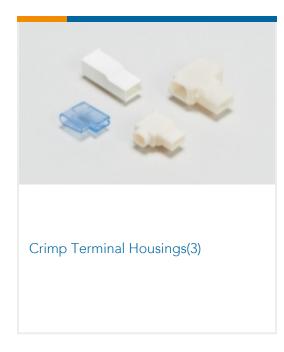

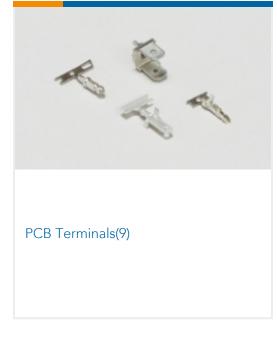

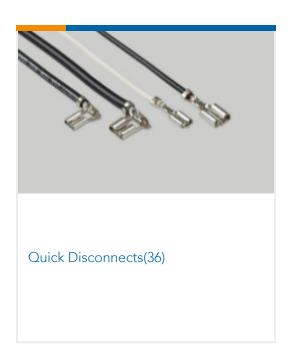

### **Documents**



### **Product Drawings**

FASTON 205/250 PCB MOUNTED TPBR

English

**CAD Files** 

3D PDF

3D

**Customer View Model** 

ENG\_CVM\_CVM\_1217080-1\_C\_c-1217080-1-c.2d\_dxf.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_1217080-1\_C\_c-1217080-1-c.3d\_igs.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_1217080-1\_C\_c-1217080-1-c.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

## Datasheets & Catalog Pages

**FASTON PCB Tabs and Receptacles** 

English

PRINTED CIRCUIT BOARD TERMINALS AND DISCONNECTS

English

**Product Specifications** 

**Application Specification** 

English

Product Environmental Compliance

MD\_1217080-1\_092420181436\_dmtec

English

MD\_1217080-1\_092420181436\_dmtec

English

**Agency Approvals** 

**UL Report** 

English