PIDG

TE Internal #: 131644-1


Ring Terminals & Spade Terminals, Ring Tongue, 22 – 18 AWG Wire Size, .3 – .9 mm² Wire Size, 509 – 3260 CMA Wire Size, Stud

Size M2.5, PIDG

View on TE.com >



Terminals & Splices > Ring Terminals & Spade Terminals

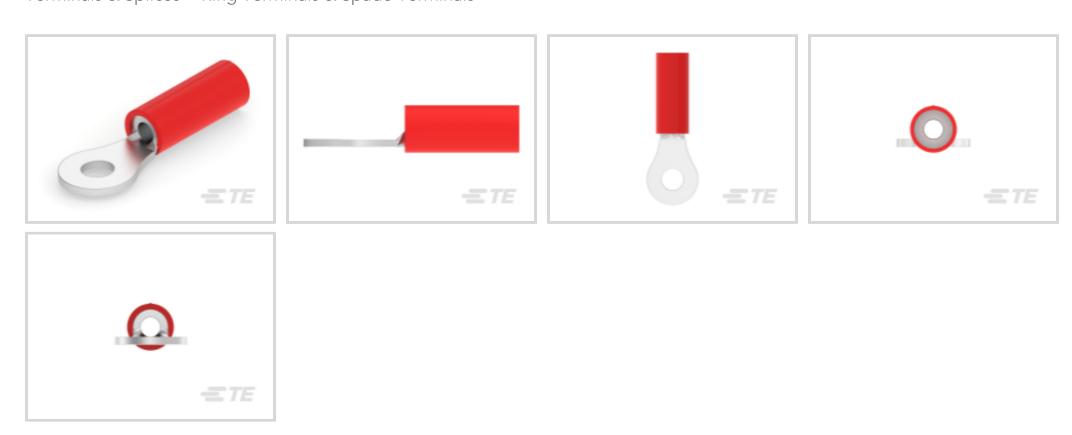

Ring & Spade Terminal Type: Ring Tongue

Wire Size: **509 – 3260 CMA**

Stud Size: M2.5

Features

Product Type Features

| Product Type Features | |
|--|--------------------|
| Shape Description | RING-041 |
| Stud Size | M2.5 |
| Sealable | No |
| Wire Insulation Support Retention Type | Insulation Support |
| Configuration Features | |
| Number of Holes | 1 |
| Terminal Angle | 180° |
| Electrical Characteristics | |
| Voltage (Max) | 300 V |
| Body Features | |
| Weight per Piece | .81 g |
| Stripe Color | Red |
| Contact Features | |
| Ring & Spade Terminal Type | Ring Tongue |
| | |

Closed

Barrel Type



| Terminal Orientation | Straight |
|---|---------------------------------------|
| Terminal Plating Material | Tin |
| Mechanical Attachment | |
| Wire Insulation Support | With |
| Dimensions | |
| Wire Size | 509 – 3260 CMA |
| Stud Diameter | 3.02 mm[.119 in] |
| Tongue Thickness | .79 mm[.031 in] |
| Overall Product Length | 22.02 mm[.867 in] |
| Accepts Wire Insulation Diameter (Max) | 1.77 mm[.07 in] |
| Accepts Wire Insulation Diameter Range | 1.25 – 1.77 mm[.049 – .07 in] |
| | |
| Usage Conditions | |
| Usage Conditions Insulation Option | Partially Insulated |
| | Partially Insulated 105 °C[221 °F] |
| Insulation Option | |
| Insulation Option Operating Temperature Range | |
| Insulation Option Operating Temperature Range Operation/Application | 105 °C[221 °F] |
| Insulation Option Operating Temperature Range Operation/Application Compatible With Wire Base Material | 105 °C[221 °F] Copper |
| Insulation Option Operating Temperature Range Operation/Application Compatible With Wire Base Material Compatible With Wire Plating Material | 105 °C[221 °F] Copper Tin |
| Insulation Option Operating Temperature Range Operation/Application Compatible With Wire Base Material Compatible With Wire Plating Material Heavy Duty | 105 °C[221 °F] Copper Tin |
| Insulation Option Operating Temperature Range Operation/Application Compatible With Wire Base Material Compatible With Wire Plating Material Heavy Duty Industry Standards | 105 °C[221 °F] Copper Tin No |
| Insulation Option Operating Temperature Range Operation/Application Compatible With Wire Base Material Compatible With Wire Plating Material Heavy Duty Industry Standards Government Qualified | 105 °C[221 °F] Copper Tin No |

Product Compliance

For compliance documentation, visit the product page on TE.com>

| EU RoHS Directive 2011/65/EU | Compliant |
|---|---|
| EU ELV Directive 2000/53/EC | Compliant |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold |
| EU REACH Regulation (EC) No. 1907/2006 | Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JAN 2021 (211) |



Does not contain REACH SVHC

Not applicable for solder process capability

| Halogen Content | BFR/CFR/PVC Free, but Br/Cl >900 ppm in other sources. |
|-----------------|--|
| | |

Product Compliance Disclaimer

Solder Process Capability

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts



Also in the Series | PIDG



Compression Connectors(17)



Crimp Terminal Housings(1)



Crimp Wire Pins, Tabs & Ferrules(41)



Hand Crimping Tools(2)










PCB Terminals(9)



Quick Disconnects(53)



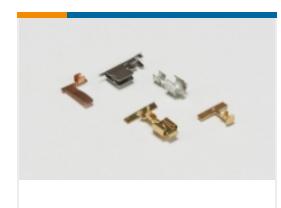

Special Purpose Terminals(1)



Documents

Product Drawings

TERM, PIDG, 20 AWG, IR, #4 STUD

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_131644-1_G.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_131644-1_G.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_131644-1_G.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use

Product Specifications

Application Specification

English

Product Environmental Compliance

TE Material Declaration

English