


### TH/.025 Connector System

TE Internal #: 1379659-5 Housing for Female Terminals, Wire-to-Board / Wire-to-Device / Wire-to-Wire, 8 Position, .087 in [2.2 mm] Centerline, TH/.025 Connector System

View on TE.com >



Connectors > Automotive Connectors > Connector Housings > TH/.025 CONNECTOR SYSTEM, HOUSING



Connector & Housing Type: Housing for Female Terminals

Mating Tab Width: .64 mm [.025 in ]

Connector System: Wire-to-Board, Wire-to-Device, Wire-to-Wire

Number of Positions: 8

Centerline (Pitch): 2.2 mm [.087 in ]

## All TH/.025 CONNECTOR SYSTEM, HOUSING (202)

# Features

## Product Type Features

Connector Shape

Connector & Housing Type

Rectangular

Housing for Female Terminals

Connector System	Wire-to-Board, Wire-to-Device, Wire-to- Wire
Sealable	No
Hybrid Connector	No
Primary Locking Feature	On the Terminal
Configuration Features	
Number of Positions	8
Number of Rows	2
Electrical Characteristics	
Operating Voltage	14 VDC
Nominal Voltage Architecture	12 V
Body Features	
Cable Exit Angle	180°
Body Material	PBT
Primary Product Color	Natural

Housing for Female Terminals, Wire-to-Board / Wire-to-Device / Wire-to-Wire, 8 Position, .087 in [2.2 mm] Centerline, TH/.025 Connector System



# **Contact Features**

Contact Size	.64mm
Contact Type	Receptacle
Mating Tab Width	.64 mm[.025 in]
Mechanical Attachment	
Mounting Feature	Without
Terminal Position Assurance	Yes
Strain Relief	Without
Mating Alignment Type	Keyed
Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)
Housing Features	
Centerline (Pitch)	2.2 mm[.087 in]
Dimensions	
Product Width	21 mm[.827 in]
Product Length	13 mm[.512 in]
Product Height	15.8 mm[.622 in]
Row-to-Row Spacing	3 mm[.118 in]
Usage Conditions	
Operating Temperature (Max)	70 °C, 75 °C, 80 °C, 85 °C, 90 °C, 100 °C [158 °F][167 °F][176 °F][185 °F][194 °F][212 ° F]
Operating Temperature Range	-40 - 100 °C[-40 - 212 °F]
Operation/Application	
Circuit Application	Signal
Industry Standards	
UL Flammability Rating	UL 94HB
Packaging Features	
Packaging Quantity	100
Packaging Method	Bag
Other	
Serviceable	Yes

Housing for Female Terminals, Wire-to-Board / Wire-to-Device / Wire-to-Wire, 8 Position, .087 in [2.2 mm] Centerline, TH/.025 Connector System



Connector Position Assurance Capable

No

# **Product Compliance**

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JUNE 2022 (224) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not reviewed for solder process capability

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


# **Compatible Parts**




Also in the Series | TH/.025 Connector System

Housing for Female Terminals, Wire-to-Board / Wire-to-Device / Wire-to-Wire, 8 Position, .087 in [2.2 mm] Centerline, TH/.025 Connector System



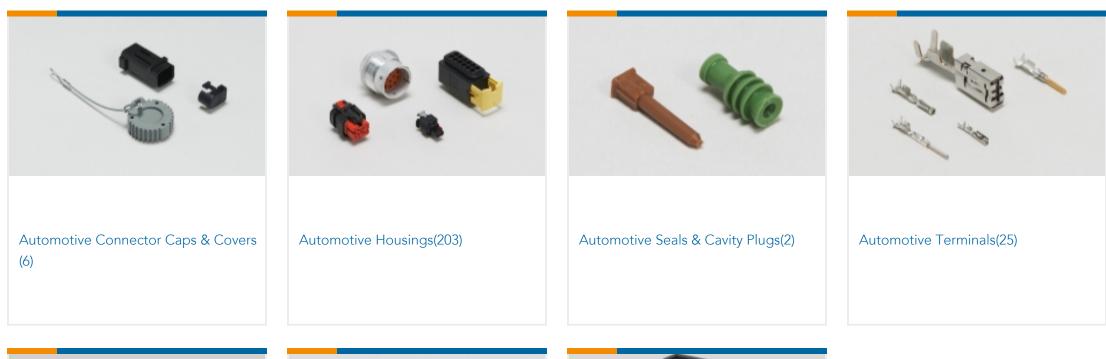

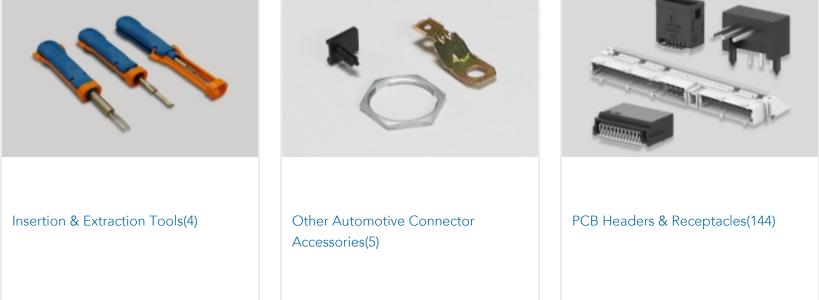

# Documents

Product Drawings

8W PLUG HOUSING ASSY NATU

English

**8W PLUG HOUSING ASSY NATU** 

English

## **CAD** Files

**Customer View Model** 

ENG\_CVM\_CVM\_1379659-5\_B.2d\_dxf.zip

English

## 3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_1379659-5\_B.3d\_igs.zip

English

Customer View Model ENG\_CVM\_CVM\_1379659-5\_B.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages

TH/.025 Connector Series

English

Product Specifications

Packaging specification for TH Tab en Plug (TH TES)

English

**&** For support call+1 800 522 6752

Housing for Female Terminals, Wire-to-Board / Wire-to-Device / Wire-to-Wire, 8 Position, .087 in [2.2 mm] Centerline, TH/.025 Connector System



**Product Specification** 

English

Product Specification

English

Instruction Sheets Instruction Sheet (non U.S.)

English