## FASTIN-FASTON | FASTIN-FASTON 250

TE Internal #: 151325-1

Crimp Terminal Housings, Receptacle, Receptacle, 11 Position, Straight, Natural, Nylon, Mating Alignment, FASTIN-FASTON 250

View on TE.com >




Terminals & Splices > Terminal Housings, Insulation Sleeves & Blocks > Crimp Terminal Housings









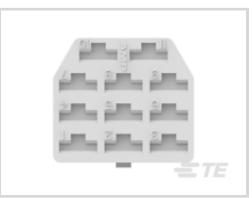

Terminal Type: Receptacle
Housing Type: Receptacle

Number of Positions: 11

Terminal Orientation: Straight
Primary Product Color: Natural

## **Features**

## Product Type Features

| Product Type           | Terminal Housing |  |  |  |
|------------------------|------------------|--|--|--|
| Sealable               | No               |  |  |  |
| Housing Type           | Receptacle       |  |  |  |
| Insulated              | No               |  |  |  |
| Configuration Features |                  |  |  |  |
| Number of Positions    | 11               |  |  |  |
| Body Features          |                  |  |  |  |
| Primary Product Color  | Natural          |  |  |  |
| Contact Features       |                  |  |  |  |

# Mechanical Attachment

Contact Mating Retention

Terminal Orientation

Terminal Type

| M | ating Alignment | With |
|---|-----------------|------|
|   | 5 5             |      |

Receptacle

Straight

Without



Crimp Terminal Housing Mounting Style Cable Mount (Free-Hanging)

## **Housing Features**

| Housing Material   | Nylon                              |
|--------------------|------------------------------------|
| Centerline (Pitch) | 9.5 mm, 10.54 mm[.374 in][.414 in] |
| Dimensions         |                                    |
| Length             | 29.6 mm[1.164 in]                  |
| Usage Conditions   |                                    |

## Packaging Features

Operating Temperature Range

| r dekaging reduces |        |
|--------------------|--------|
| Packaging Quantity | 1000   |
| Packaging Method   | Carton |

-40 - 105 °C[-40 - 221 °F]

# **Product Compliance**

For compliance documentation, visit the product page on TE.com>

| EU RoHS Directive 2011/65/EU                  | Compliant   |
|---|---|
| EU ELV Directive 2000/53/EC                   | Compliant   |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold   |
| EU REACH Regulation (EC) No. 1907/2006        | Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JUNE 2022 (224) Does not contain REACH SVHC |
| Halogen Content                               | Low Halogen - Br, Cl, F, I < 900 ppm per<br>homogenous material. Also BFR/CFR/PVC<br>Free                                 |
| Solder Process Capability                     | Not applicable for solder process capability  |

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach



# **Compatible Parts**



6.6



FF 250 REC 14-12AWG TPBR

REREELING

TE Part # 170258-1
FF 250 REC 14-12AWG BR REREELING


















# Also in the Series | FASTIN-FASTON 250

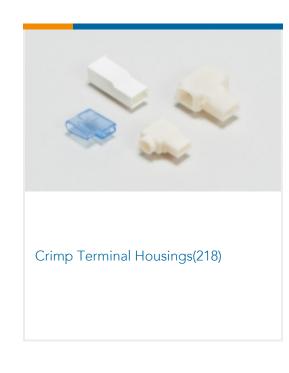



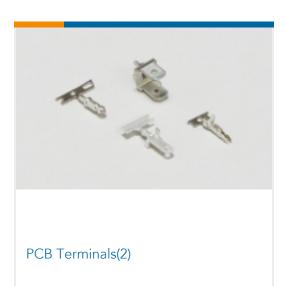

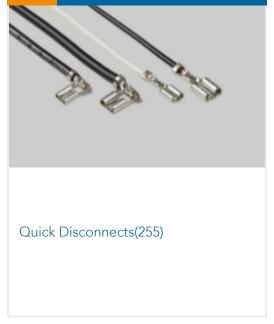

## **Documents**

Product Drawings
FF 250 REC HSG 11P NYLON NAT

English

CAD Files
3D PDF

3D



**Customer View Model** 

ENG\_CVM\_CVM\_151325-1\_G.2d\_dxf.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_151325-1\_G.3d\_igs.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_151325-1\_G.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages

White Paper: Nylon Discoloration

English

**Product Specifications** 

**Application Specification** 

English