1544678-1 - ACTIVE

NG Power Terminals and Connectors, NG1

TE Internal #: 1544678-1 Housing for Female Terminals, Wire-to-Wire, 2 Position, .472 in [12 mm] Centerline, Sealable, Black, Signal, Cable Mount (Free-Hanging), Hybrid

View on TE.com >

Connectors > Automotive Connectors > Connector Housings



Connector & Housing Type: Housing for Female Terminals

Mating Tab Width: .64 mm, 1.5 mm [.025 in, .059 in]

Connector System: Wire-to-Wire

Number of Positions: 2

Centerline (Pitch): 12 mm [.472 in]

Features

Product Type Features

Connector ShapeCircularConnector & Housing TypeHousing for Female TerminalsConnector SystemWire-to-Wire



Sealable	Yes
Hybrid Connector	No
Primary Locking Feature	Integrated in Housing
Configuration Features	
Number of Positions	2
Number of Rows	1
Electrical Characteristics	
Operating Voltage	13 VDC
Nominal Voltage Architecture	12 V
Body Features	
Cable Exit Angle	180°
Body Material	PBT
Primary Product Color	Black
Contact Features	
Contact Size	8mm

Housing for Female Terminals, Wire-to-Wire, 2 Position, .472 in [12 mm] Centerline, Sealable, Black, Signal, Cable Mount (Free-Hanging), Hybrid



Contact Type	Receptacle
Mating Tab Width	.64 mm, 1.5 mm[.025 in][.059 in]
Mechanical Attachment	
Mounting Feature	Without
Terminal Position Assurance	Yes
Strain Relief	Without
Mating Alignment Type	Keyed
Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)
Housing Features	
Centerline (Pitch)	12 mm[.472 in]
Dimensions	
Product Width	43.4 mm[1.709 in]
Product Length	35.1 mm[1.382 in]
Product Height	34.1 mm[1.343 in]
Usage Conditions	

Operating Temperature (Max)

70 °C, 75 °C, 80 °C, 85 °C, 90 °C, 100 °C,

	105 °C, 110 °C, 120 °C, 125 °C[158 °F][167 ° F][176 °F][185 °F][194 °F][212 °F][221 °F][230 °F][248 °F][257 °F]
Operating Temperature Range	-40 – 125 °C[-40 – 257 °F]
Operation/Application	
Circuit Application	Signal
Industry Standards	
Degree of Protection	IP67
UL Flammability Rating	UL 94HB
Packaging Features	
Packaging Quantity	750
Packaging Method	Box & Carton
Other	
Serviceable	Yes
Connector Position Assurance Capable	Yes

Housing for Female Terminals, Wire-to-Wire, 2 Position, .472 in [12 mm] Centerline, Sealable, Black, Signal, Cable Mount (Free-Hanging), Hybrid



Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JUNE 2022 (224) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts




Housing for Female Terminals, Wire-to-Wire, 2 Position, .472 in [12 mm] Centerline, Sealable, Black, Signal, Cable Mount (Free-Hanging), Hybrid



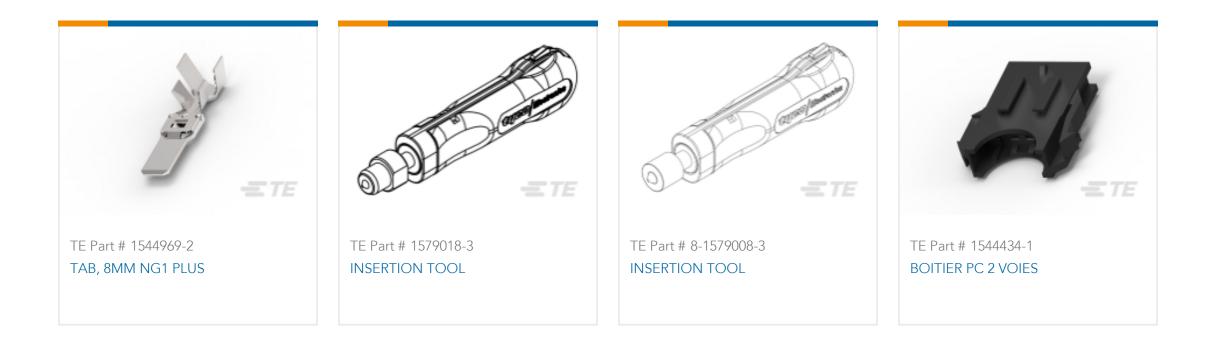


Also in the Series | NG Power Terminals and Connectors

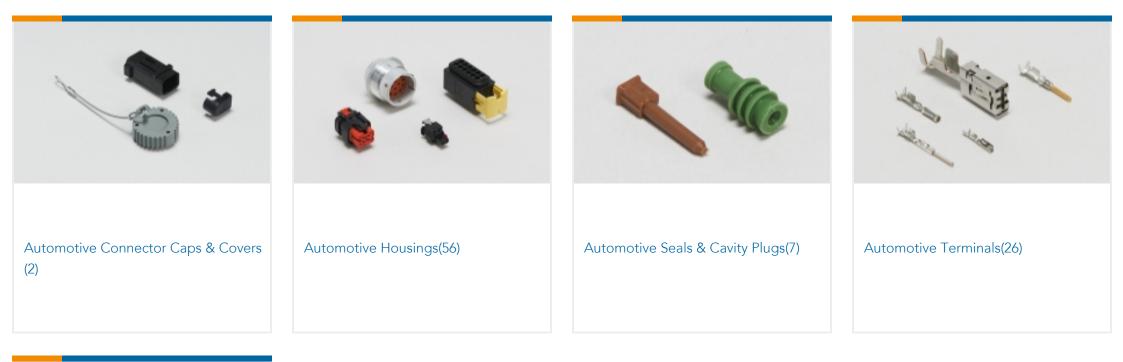




Insertion & Extraction Tools(13)

Also in the Series NG1

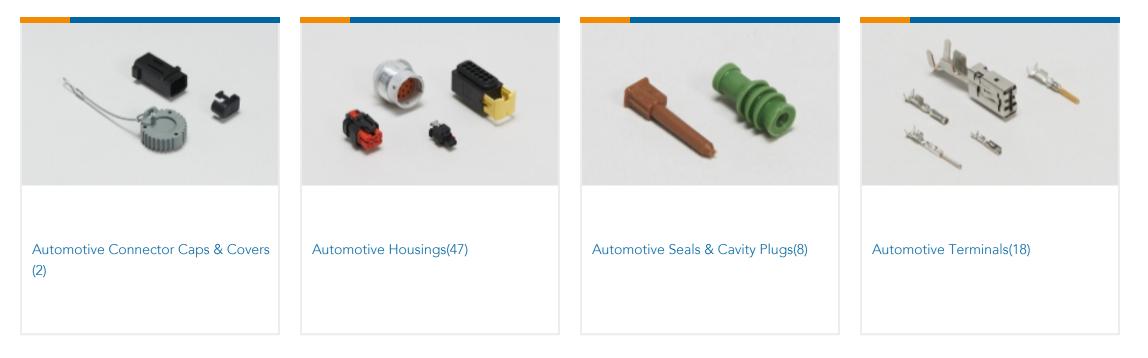

Housing for Female Terminals, Wire-to-Wire, 2 Position, .472 in [12 mm] Centerline, Sealable, Black, Signal, Cable Mount (Free-Hanging), Hybrid



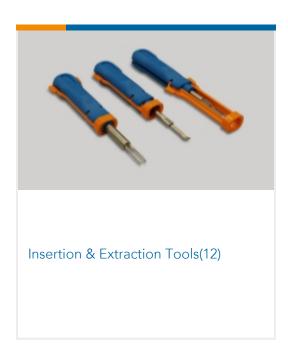

Documents

Product Drawings SEALED 8NG1 2W HSG WITHOUT SKIRT AND CPA

English

CAD Files

Customer View Model

ENG_CVM_CVM_1544678-1_A.2d_dxf.zip

English

3D PDF

3D

Customer View Model ENG_CVM_CVM_1544678-1_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1544678-1_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications

Product Specification

English

Product Specification

French

Instruction Sheets Instruction Sheet (non U.S.)

English