1718490-2 - ACTIVE

AMP | AMP MCP 1.5K, AMP MCP Connector System

TE Internal #: 1718490-2 Housing for Female Terminals, Wire-to-Wire, 9 Position, .157 in [4 mm] Centerline, Natural, Signal, Cable Mount (Free-Hanging), Hybrid

View on TE.com >

Connectors > Automotive Connectors > Connector Housings > AMP MCP Unsealed Connector Housings



Connector & Housing Type: Housing for Female Terminals

Mating Tab Width: 1.6 mm [.063 in]

Connector System: Wire-to-Wire

Number of Positions: 9

Centerline (Pitch): 4 mm [.157 in]

All AMP MCP Unsealed Connector Housings (187)



Features

Product Type Features

| Connector Shape | Rectangular |
|---------------------------------------|------------------------------|
| Connector & Housing Type | Housing for Female Terminals |
| Connector System | Wire-to-Wire |
| Sealable | No |
| Hybrid Connector | No |
| Primary Locking Feature | On the Terminal |
| Configuration Features | |
| | |
| Number of Positions | 9 |
| | 9 1 |
| Number of Positions | |
| Number of Positions Number of Rows | |

Housing for Female Terminals, Wire-to-Wire, 9 Position, .157 in [4 mm] Centerline, Natural, Signal, Cable Mount (Free-Hanging), Hybrid



Body Features

| Cable Exit Angle | Other |
|-----------------------------|----------------------------|
| Body Material | PBT GF |
| Primary Product Color | Natural |
| Connector Code | В |
| Contact Features | |
| Contact Size | 1.5K |
| Contact Type | Receptacle |
| Mating Tab Width | 1.6 mm[.063 in] |
| Mechanical Attachment | |
| Mounting Feature | Without |
| Terminal Position Assurance | Yes |
| Strain Relief | Without |
| Mating Alignment Type | Keyed |
| Mating Alignment | With |
| Connector Mounting Type | Cable Mount (Free-Hanging) |

Housing Features

| Centerline (Pitch) | 4 mm[.157 in] |
|-----------------------------|---|
| Dimensions | |
| Product Width | 23.5 mm[.925 in] |
| Product Length | 37.2 mm[1.465 in] |
| Product Height | 4.2 mm[.165 in] |
| Usage Conditions | |
| Operating Temperature (Max) | 70 °C, 75 °C, 80 °C, 85 °C, 90 °C, 100 °C, 105 °C, 110 °C, 120 °C[158 °F][167 °F][176 ° F][185 °F][194 °F][212 °F][221 °F][230 °F][248 °F] |
| Operating Temperature Range | -40 – 120 °C[-40 – 248 °F] |
| Operation/Application | |
| Circuit Application | Signal |
| Industry Standards | |
| UL Flammability Rating | UL 94HB |
| Packaging Features | |

Housing for Female Terminals, Wire-to-Wire, 9 Position, .157 in [4 mm] Centerline, Natural, Signal, Cable Mount (Free-Hanging), Hybrid



| Packaging Quantity | 1000 |
|--------------------------------------|------|
| Packaging Method | Box |
| Other | |
| Serviceable | Yes |
| Connector Position Assurance Capable | No |

Product Compliance

For compliance documentation, visit the product page on TE.com>

| EU RoHS Directive 2011/65/EU | Compliant |
|---|---|
| EU ELV Directive 2000/53/EC | Compliant |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold |
| EU REACH Regulation (EC) No. 1907/2006 | Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JUNE 2022 (224) Does not contain REACH SVHC |
| Halogen Content | Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free |
| Solder Process Capability | Not applicable for solder process capability |


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts

Housing for Female Terminals, Wire-to-Wire, 9 Position, .157 in [4 mm] Centerline, Natural, Signal, Cable Mount (Free-Hanging), Hybrid



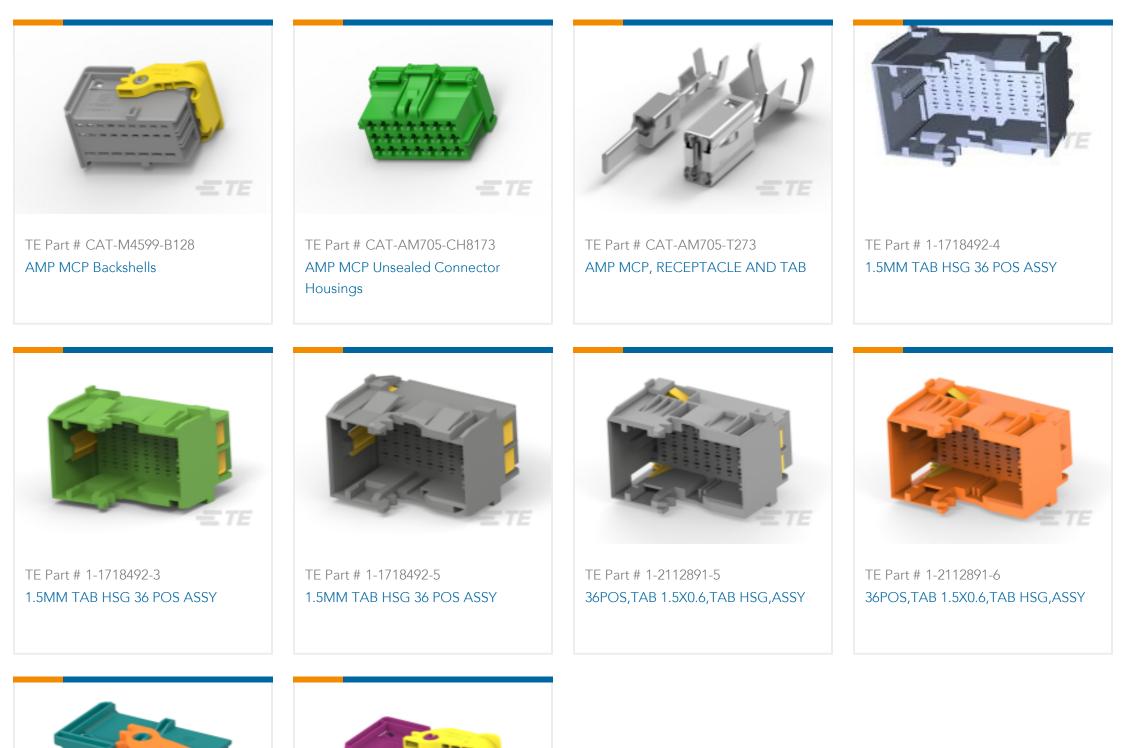



TE Part # 1-2141847-4 CARRIER,RECEPTCALE HSG, 36POS, ASSY



TE Part # 1-2364901-2 36POS. AMP MCP 1,5K, REC HSG ASSY, UNSLD


Also in the Series AMP MCP 1.5K



Also in the Series AMP MCP Connector System

Housing for Female Terminals, Wire-to-Wire, 9 Position, .157 in [4 mm] Centerline, Natural, Signal, Cable Mount (Free-Hanging), Hybrid



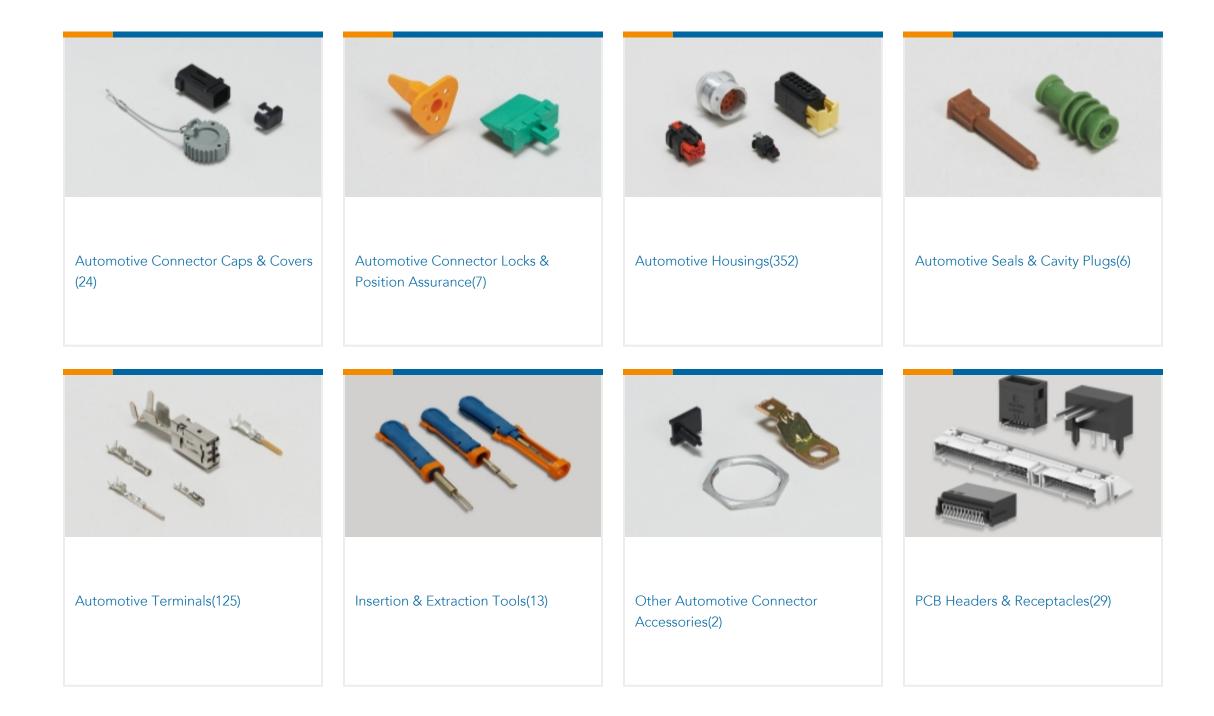

Documents

Product Drawings AMP MCP 1.5 RECEPT HSG 9 POS

English

CAD Files

Customer View Model

ENG_CVM_1718490-2_A1.3d_igs.zip

English

Customer View Model

ENG_CVM_1718490-2_A1.3d_stp.zip

English

Customer View Model

ENG_CVM_1718490-2_A1.2d_dxf.zip

English

3D PDF

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Product Specifications Application Specification

German