174663-2 - ACTIVE


AMP | Econoseal, Econoseal J - Mark II

TE Internal #: 174663-2 Housing for Male Terminals, Wire-to-Wire, 12 Position, .189 in [4.8 mm] Centerline, Sealable, Black, Signal, Cable Mount (Free-Hanging), Hybrid

View on TE.com >



Connectors > Automotive Connectors > Connector Housings > ECONOSEAL, CONNECTOR HOUSING



Connector & Housing Type: Housing for Male Terminals

Mating Tab Width: 1.8 mm [.071 in]

Connector System: Wire-to-Wire

Number of Positions: 12

Centerline (Pitch): 4.8 mm [.189 in]

All ECONOSEAL, CONNECTOR HOUSING (90)

Features

Product Type Features

Connector Shape

Connector & Housing Type

Rectangular

Housing for Male Terminals

Connector System	Wire-to-Wire					
Sealable	Yes					
Hybrid Connector	No					
Primary Locking Feature	Integrated in Housing					
Configuration Features						
Number of Positions	12					
Number of Rows	2					
Electrical Characteristics						
Operating Voltage	12 VDC					
Nominal Voltage Architecture	12 V					
Body Features						
Cable Exit Angle	180°					
Body Material	PBT					
Primary Product Color	Black					

Housing for Male Terminals, Wire-to-Wire, 12 Position, .189 in [4.8 mm] Centerline, Sealable, Black, Signal, Cable Mount (Free-Hanging), Hybrid



Contact Features

Contact Size	1.8mm
Contact Type	Tab
Mating Tab Width	1.8 mm[.071 in]
Mechanical Attachment	
Mounting Feature	Without
Terminal Position Assurance	Yes
Strain Relief	Without
Mating Alignment Type	Polarization
Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)
Housing Features	
Centerline (Pitch)	4.8 mm[.189 in]
Dimensions	
Product Width	37.5 mm[1.476 in]
Product Length	36.5 mm[1.437 in]
Product Height	26.85 mm[1.057 in]
Row-to-Row Spacing	3 mm[.118 in]
Usage Conditions	
Operating Temperature (Max)	70 °C, 75 °C, 80 °C, 85 °C, 90 °C, 100 °C, 105 °C[158 °F][167 °F][176 °F][185 °F][194 °F] [212 °F][221 °F]
Operating Temperature Range	-30 – 105 °C[-22 – 221 °F]
Operation/Application	
Circuit Application	Signal
Industry Standards	
UL Flammability Rating	UL 94V-2
Packaging Features	
Packaging Quantity	100
Packaging Method	Bag
Other	
Serviceable	Yes
	100

Housing for Male Terminals, Wire-to-Wire, 12 Position, .189 in [4.8 mm] Centerline, Sealable, Black, Signal, Cable Mount (Free-Hanging), Hybrid



Connector Position Assurance Capable

No

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant	
EU ELV Directive 2000/53/EC	Compliant	
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold	
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JUNE 2022 (224) Does not contain REACH SVHC	
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.	
Solder Process Capability	Not applicable for solder process capability	

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts




Housing for Male Terminals, Wire-to-Wire, 12 Position, .189 in [4.8 mm] Centerline, Sealable, Black, Signal, Cable Mount (Free-Hanging), Hybrid






Also in the Series | Econoseal

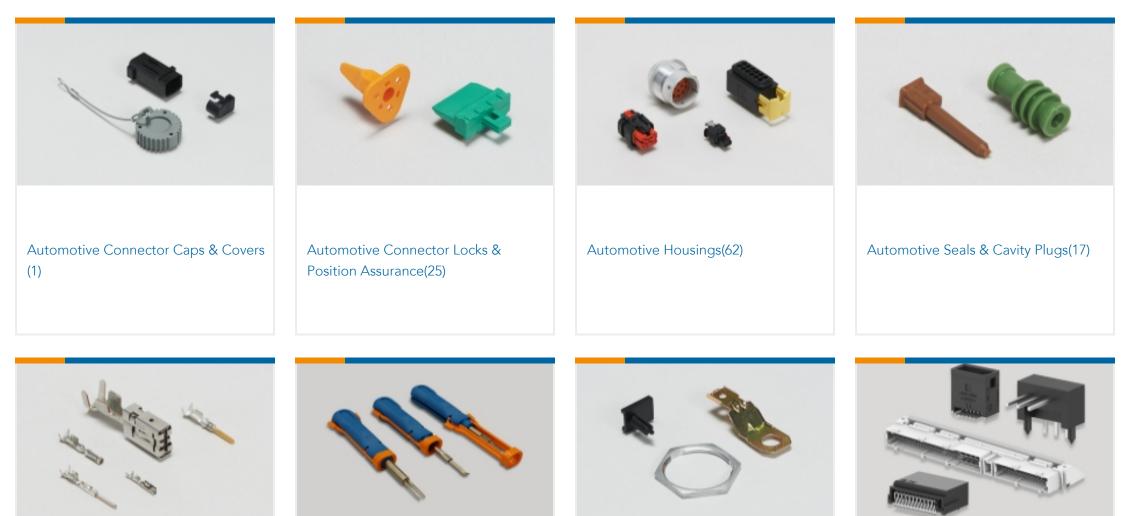


Automotive Terminals(47)	Insertion & Extraction Tools(7)	Other Automotive Connector	PCB Headers & Receptacles(4)
		Accessories(5)	



Also in the Series | Econoseal J - Mark II

Housing for Male Terminals, Wire-to-Wire, 12 Position, .189 in [4.8 mm] Centerline, Sealable, Black, Signal, Cable Mount (Free-Hanging), Hybrid



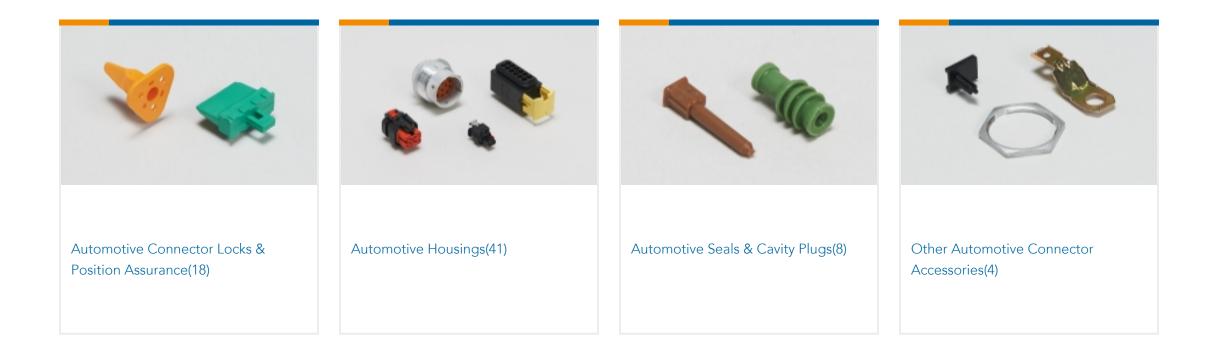

Documents

Product Drawings 12 POS HSG MARK II+

English

CAD Files

Customer View Model

ENG_CVM_CVM_174663-2_C.2d_dxf.zip

English

3D PDF

3D

Customer View Model ENG_CVM_CVM_174663-2_C.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_174663-2_C.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages Econoseal Connector Series

English

Product Specifications

Product Specification

English

Product Specification

Japanese

Instruction Sheets ECONOSEAL J MARK II+ CONNECTOR (EJ-MK II+) English Customer Manual (non U.S.)

English

ECONOSEAL J MARK II+ CONNECTOR

English

Housing for Male Terminals, Wire-to-Wire, 12 Position, .189 in [4.8 mm] Centerline, Sealable, Black, Signal, Cable Mount (Free-Hanging), Hybrid



Customer Manual (non U.S.)

English

Agency Approvals Agency Approval Document

English