



#### Power Double Lock

TE Internal #: 179862-1 Rectangular Power Connectors, Housing, Plug, Wire-to-Board / Wire-to-Wire, 6 Position, 6.5 mm [.255 in] Centerline, Wire & Cable, Power Double Lock

#### View on TE.com >

Connectors > Power Connectors > Rectangular Power > Rectangular Power Connectors > STD Temp Power Double Lock Plug

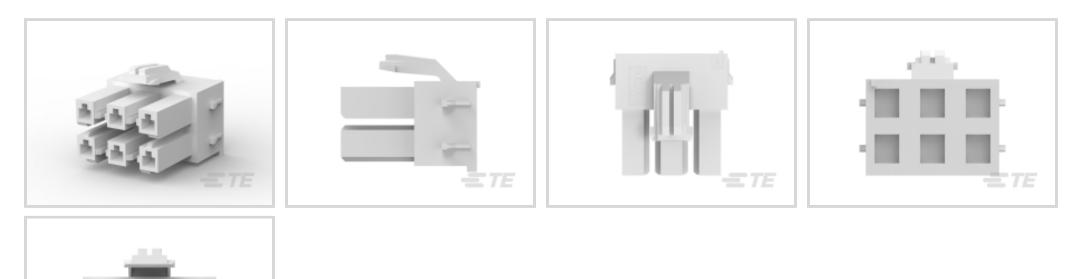

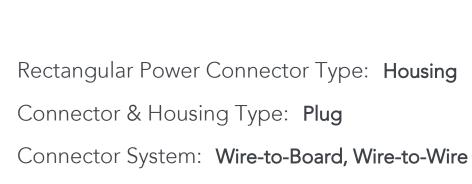

Number of Positions: 6

Centerline (Pitch): 6.5 mm [.255 in ]

All STD Temp Power Double Lock Plug (68)



### Features

#### **Product Type Features**

Rectangular Power Connector Type	Housing	
Connector & Housing Type	Plug	
Connector System	Wire-to-Board, Wire-to-Wire	
Sealable	No	
Connector & Contact Terminates To	Wire & Cable	
Configuration Features		
Number of Positions	6	
Number of Rows	2	
Electrical Characteristics		
Operating Voltage	300 VAC	
Contact Features		
Contact Layout	Matrix	

Rectangular Power Connectors, Housing, Plug, Wire-to-Board / Wire-to-Wire, 6 Position, 6.5 mm [.255 in] Centerline, Wire & Cable, Power Double Lock



Contact Retention Within Housing	Without
Contact Type	Receptacle
Termination Features	
Termination Method to Wire & Cable	Crimp
Wire/Cable Type	Discrete Wire
Wire Type	Stranded
Mechanical Attachment	
Connector Mounting Type	Cable Mount (Free-Hanging)
Housing Features	
Centerline (Pitch)	6.5 mm[.255 in]
Housing Color	Natural
Housing Material	Nylon 6/6
Dimensions	
Row-to-Row Spacing	6.5 mm[.256 in]
Usage Conditions	
Operating Temperature Range	-30 – 105 °C[-22 – 221 °F]

#### **Operation/Application**

Circuit Application	Power & Signal	
Industry Standards		
UL Flammability Rating	UL 94V-0	
Glow Wire Rating	Standard Part - Not Glow Wire	
Agency/Standard Number	UL 1977	
Agency/Standard	UL	
Packaging Features		
Packaging Method	Bag	
Packaging Quantity	100	
Other		
For Use With	Contacts: 177914 or 177915, Double Lock Plate 316062-1, Header: 179849	

## Product Compliance

For compliance documentation, visit the product page on TE.com>

Rectangular Power Connectors, Housing, Plug, Wire-to-Board / Wire-to-Wire, 6 Position, 6.5 mm [.255 in] Centerline, Wire & Cable, Power Double Lock



EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JUNE 2022 (224) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


## **Compatible Parts**




**C** For support call+1 800 522 6752


Rectangular Power Connectors, Housing, Plug, Wire-to-Board / Wire-to-Wire, 6 Position, 6.5 mm [.255 in] Centerline, Wire & Cable, Power Double Lock



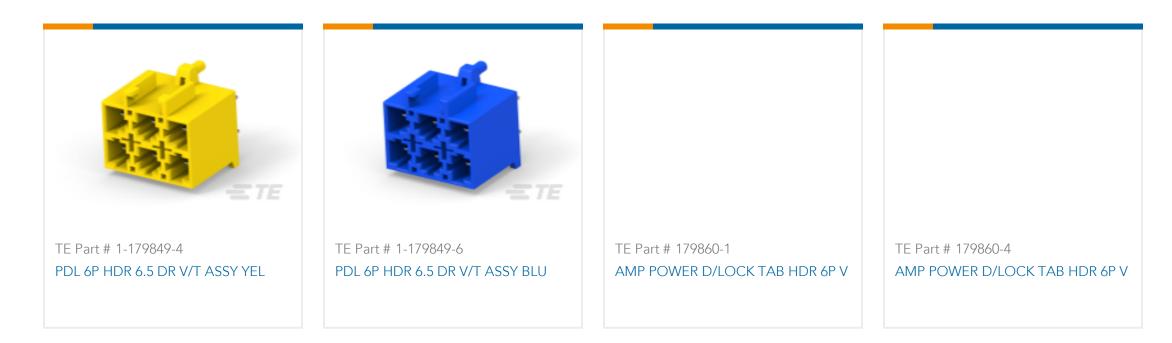




# Also in the Series | Power Double Lock

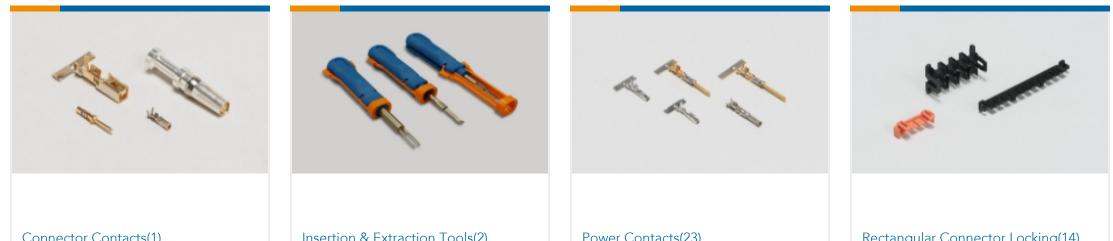

Connector Contacts(1)	Insertion & Extraction Tools(2)	Power Contacts(23)	Rectangular Connector Locking(14)



#### Documents

Product Drawings AMP POWER D/LOCK PLUG HSG 6P

English

**CAD** Files

3D PDF

3D

Customer View Model

**C** For support call+1 800 522 6752

Rectangular Power Connectors, Housing, Plug, Wire-to-Board / Wire-to-Wire, 6 Position, 6.5 mm [.255 in] Centerline, Wire & Cable, Power Double Lock



ENG\_CVM\_CVM\_179862-1\_N.2d\_dxf.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_179862-1\_N.3d\_igs.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_179862-1\_N.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use

Datasheets & Catalog Pages SOFT\_SHELL\_PIN\_AND\_SOCKET\_CONNECTORS\_CATALOG

English

**Product Specifications** 

**Product Specification** 

English

**Product Environmental Compliance** 

**Product Compliance** 

English

**Product Compliance** 

English

Agency Approvals CSA Certificate

English