
179970-4 - ACTIVE

Positive Lock | Positive Lock 250

TE Internal #: 179970-4 Crimp Terminal Housings, Receptacle, Receptacle, 1 Position, Straight, UL 94V-0, Yellow, Nylon, Mating Alignment, Positive Lock 250

View on TE.com >

Terminals & Splices > Terminal Housings, Insulation Sleeves & Blocks > Crimp Terminal Housings

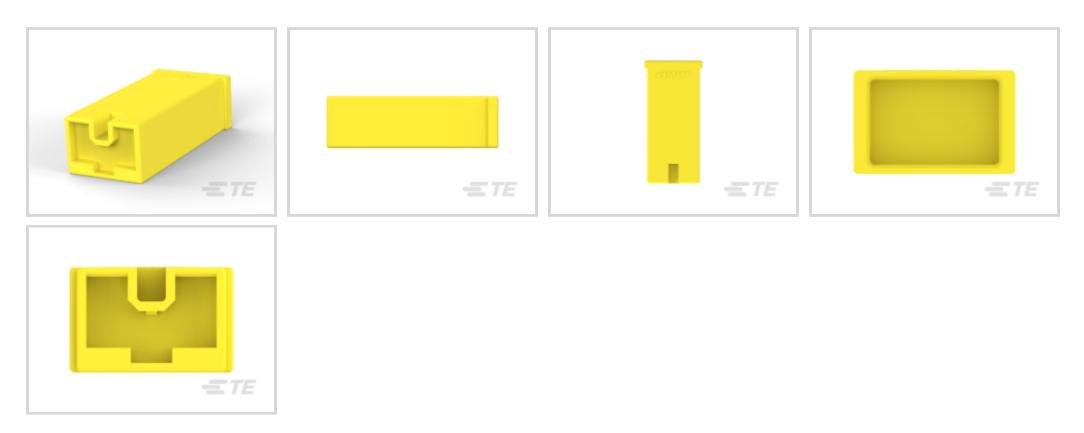

Terminal Type: **Receptacle** Housing Type: **Receptacle** Number of Positions: **1**

Terminal Orientation: Straight

UL Flammability Rating: UL 94V-0

Features



Product Type Features

Terminates To	Wire & Cable	
Product Type	Terminal Housing	
Sealable	No	
Connector System	Wire-to-Board, Wire-to-Wire	
Housing Type	Receptacle	
Insulated	No	
Configuration Features		
Number of Positions	1	
Body Features		
Primary Product Color	Yellow	
Contact Features		
Terminal Type	Receptacle	
Terminal Orientation	Straight	
Contact Mating Retention	Without	

C For support call+1 800 522 6752

179970-4

Crimp Terminal Housings, Receptacle, Receptacle, 1 Position, Straight, UL 94V-0, Yellow, Nylon, Mating Alignment, Positive Lock 250



Mechanical Attachment

Mating Alignment Type	Polarization
Mating Alignment	With
Crimp Terminal Housing Mounting Style	Cable Mount (Free-Hanging)
Housing Features	
Housing Material	Nylon
Usage Conditions	
Operating Temperature Range	-40 - 105 °C[-40 - 221 °F]
Industry Standards	
UL Flammability Rating	UL 94V-0
Packaging Features	
Packaging Quantity	400
Product Compliance	
For compliance documentation, visit the product page on TE.com>	
ELL ROUS Directive 2011/65/ELL	Compliant

EU RoHS Directive 2011/65/EU	Compliant
FLL FLV Directive 2000/53/FC	Compliant

EU ELV DIrective 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JUNE 2022 (224) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Solder Process Capability

Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides

179970-4

Crimp Terminal Housings, Receptacle, Receptacle, 1 Position, Straight, UL 94V-0, Yellow, Nylon, Mating Alignment, Positive Lock 250



on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts



TE Part # 179975-1 250 PL EX REC. 15-10AWG PTBR



TE Part # 179973-1 250 PL EX REC. 22-18AWG PTBR



TE Part # 179974-1 250 PL EX REC. 18-14AWG PTBR




TE Part # 179973-6 PL EX 250 REC 22-18 PTPCOPPER-ALLOY



Also in the Series | Positive Lock 250

And the second s			
Automotive Terminals(1)	Crimp Terminal Housings(202)	Insertion & Extraction Tools(3)	Insulation Boots & Sleeves(4)

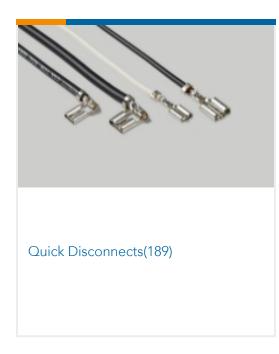

Documents

Product Drawings PL EXII 250 REC HSG 1P NYLON YELLOW

179970-4

Crimp Terminal Housings, Receptacle, Receptacle, 1 Position, Straight, UL 94V-0, Yellow, Nylon, Mating Alignment, Positive Lock 250



English **CAD** Files 3D PDF 3D **Customer View Model** ENG_CVM_CVM_179970-4_J.2d_dxf.zip English **Customer View Model** ENG_CVM_CVM_179970-4_J.3d_igs.zip English **Customer View Model** ENG_CVM_CVM_179970-4_J.3d_stp.zip English By downloading the CAD file I accept and agree to the Terms and Conditions of use **Product Specifications Product Specification** Japanese 250 Series, Positive Lock EX-II Connector Japanese

Product Environmental Compliance Product Compliance

English

Product Compliance

English