


CST

TE Internal #: 1-1375820-3 Housing, Receptacle, Wire-to-Wire, 13 Position, 2.54 mm [.1 in] Centerline, Crimp, 1 Row, Natural, Mating Retention, Wire & Cable, Power & Signal

View on TE.com >

Connectors > PCB Connectors > Wire-to-Board Connectors > Wire-to-Board Connector Assemblies & Housings >

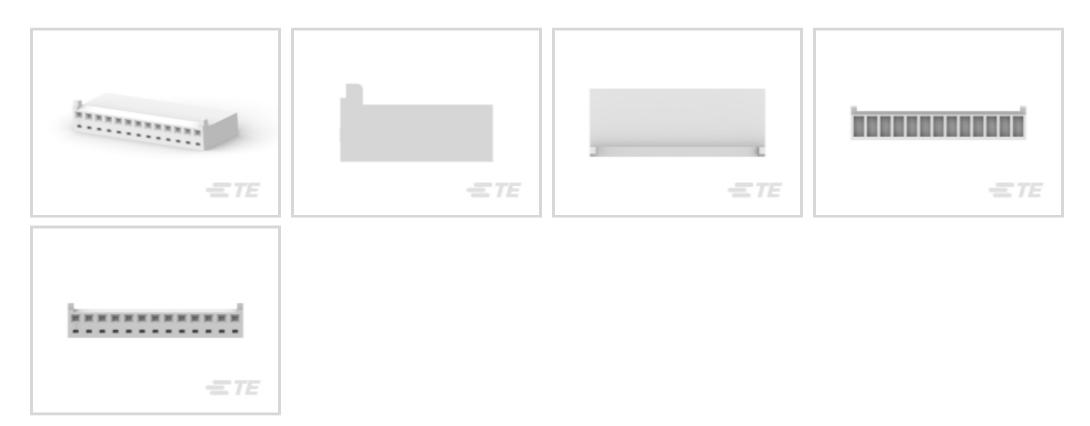

Receptacle Housing: 2.54mm, 1 Row, CST-100 II

Connector Product Type: Housing

Connector & Housing Type: Receptacle

Connector System: Wire-to-Wire

Number of Positions: 13

Centerline (Pitch): 2.54 mm [.1 in]

All Receptacle Housing: 2.54mm, 1 Row, CST-100 II (31)



Features

Product Type Features

Connector Product Type	Housing
Connector & Housing Type	Receptacle
Connector System	Wire-to-Wire
Sealable	No
Connector & Contact Terminates To	Wire & Cable
Configuration Features	
Number of Positions	13
Number of Rows	1
Electrical Characteristics	
Operating Voltage	250 VAC
Contact Features	

C For support call+1 800 522 6752

Housing, Receptacle, Wire-to-Wire, 13 Position, 2.54 mm [.1 in] Centerline, Crimp, 1 Row, Natural, Mating Retention, Wire & Cable, Power & Signal



Contact Layout	Inline
Contact Retention Within Housing	Without
Contact Type	Socket
Contact Current Rating (Max)	7 A
Termination Features	
Termination Method to Wire & Cable	Crimp
Mechanical Attachment	
Strain Relief	Without
PCB Mount Alignment	Without
Panel Mount Feature	Without
PCB Mount Retention	Without
Mating Retention Type	Latch
Mating Retention	With
Connector Mounting Type	Cable Mount (Free-Hanging)
Housing Features	
Housing Material	Nylon - GF
Centerline (Pitch)	2.54 mm[.1 in]
Housing Color	Natural
Dimensions	
Connector Length	33.53 mm[1.32 in]
Connector Height	6.6 mm[.26 in]
Wire Size	.13 – .33 mm²
Usage Conditions	
Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]
Operation/Application	
Circuit Application	Power & Signal
Industry Standards	
CSA Rating	Certified
Glow Wire Rating	Standard Part - Not Glow Wire
UL Flammability Rating	UL 94V-0
UL File Number	E28476
UL Rating	Recognized

Housing, Receptacle, Wire-to-Wire, 13 Position, 2.54 mm [.1 in] Centerline, Crimp, 1 Row, Natural, Mating Retention, Wire & Cable, Power & Signal



Agency/Standard	CSA, UL
CSA File Number	LR 7189
Packaging Features	
Packaging Quantity	1
Packaging Method	Package
Other	
Comment	Accepts Rec Contact p/n 1375819 & MTA- 100 Keying Plug P/N 641994-1, Not interchangeable with CST-100 contacts and
	housings.
Product Compliance For compliance documentation, visit the product page on TE.com>	
-	
For compliance documentation, visit the product page on TE.com>	housings.
For compliance documentation, visit the product page on TE.com> EU RoHS Directive 2011/65/EU	housings. Compliant

Halogen Content

Does not contain REACH SVHC

Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Solder Process Capability

Not applicable for solder process capability


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts

Housing, Receptacle, Wire-to-Wire, 13 Position, 2.54 mm [.1 in] Centerline, Crimp, 1 Row, Natural, Mating Retention, Wire & Cable, Power & Signal



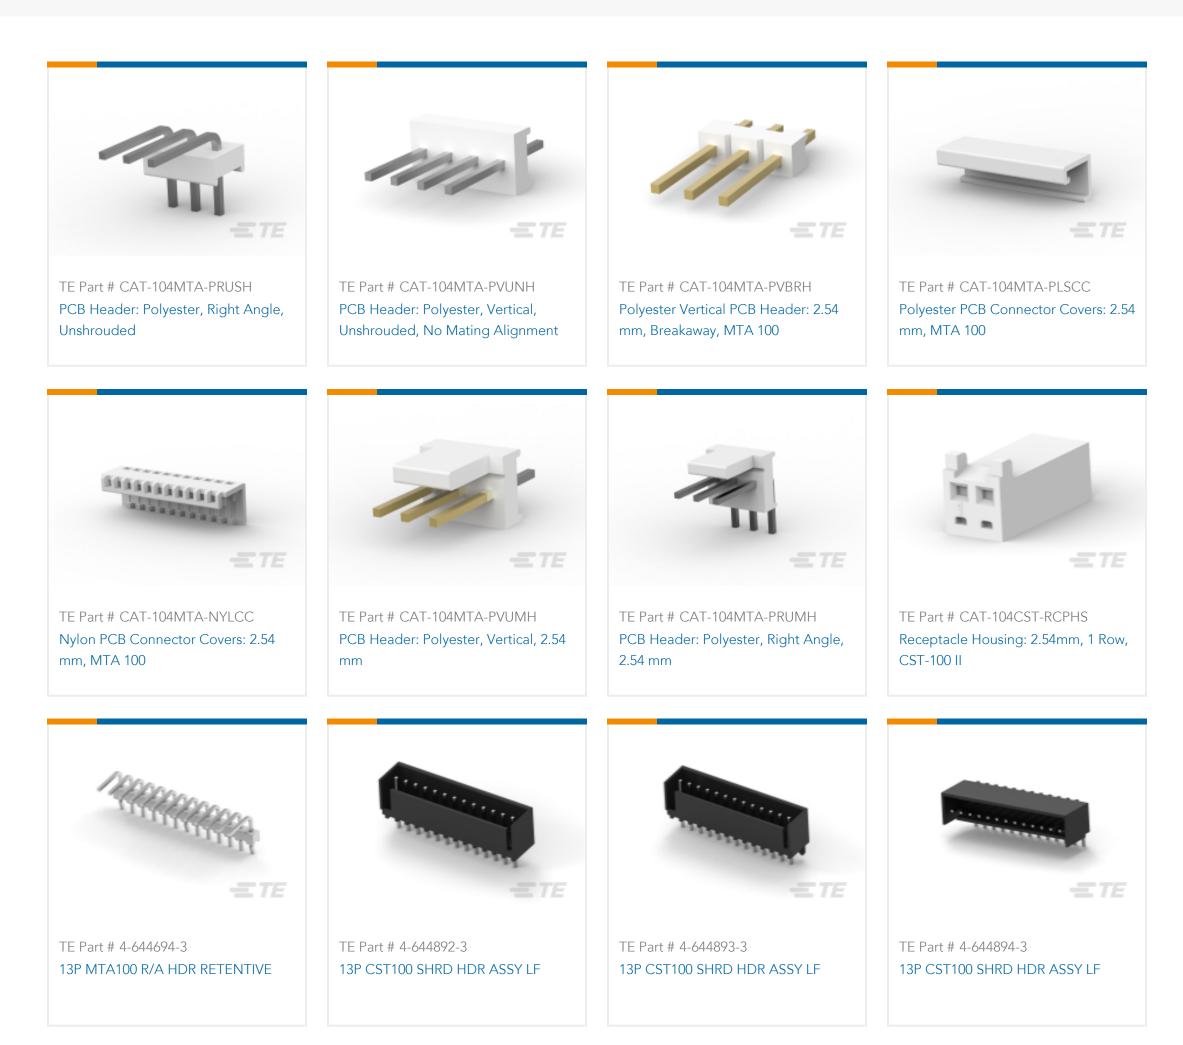



Documents

Product Drawings CST-100 II HOUSING 13 POS

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1-1375820-3_A.2d_dxf.zip

English

Housing, Receptacle, Wire-to-Wire, 13 Position, 2.54 mm [.1 in] Centerline, Crimp, 1 Row, Natural, Mating Retention, Wire & Cable, Power & Signal



Customer View Model

ENG_CVM_CVM_1-1375820-3_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1-1375820-3_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications

Application Specification

English

Product Environmental Compliance

TE Material Declaration

English

Instruction Sheets Instruction Sheet (U.S.)

English