# SSRD-240D40 V ACTIVE


#### Potter & Brumfield | Potter & Brumfield SSRD

TE Internal #: 1-1393030-6 Power Relays, Solid State, (2) x 1 Form A (SPST-NO), Chassis Mount, Potter & Brumfield SSRD

#### View on TE.com >



Relays, Contactors & Switches > Relays > Power Relays > P&B SSRD SERIES SOLID STATE RELAYS

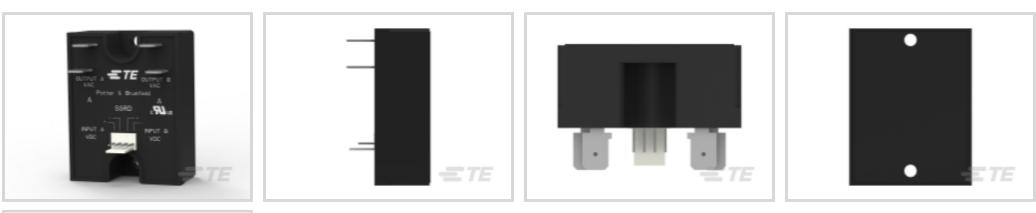



Power Relay Type: Solid State

Contact Arrangement: (2) x 1 Form A (SPST-NO)

Relay Mounting Type: Chassis Mount

All P&B SSRD SERIES SOLID STATE RELAYS (3)

### Features

Product Type Features	
Output Type	AC
Power Relay Type	Solid State
Configuration Features	
Output Switching	Zero
Electrical Characteristics	
Input Voltage Typical	4 – 15 VDC
Output Voltage (Max)	280 V
Output Voltage Rating (AC Relays)	24 – 280 Vrms
Output Current Rating	.1 – 40 Arms
Output Current (Min)	.1 A
Body Features	
Product Weight	90 g[3.17 oz]
Case Color	Black

### **Contact Features**

**C** For support call+1 800 522 6752

11/02/2022 09:00AM | Page 1

#### SSRD-240D40

Power Relays, Solid State, (2) x 1 Form A (SPST-NO), Chassis Mount, Potter & Brumfield SSRD



Switch Arrangement	(2) x 1 Form A (SPST-NO)
Contact Arrangement	(2) x 1 Form A (SPST-NO)
Termination Features	
Relay Termination Type	.25 x .032 Quick Connect Terminals
Mechanical Attachment	
Coupling	Optical
Relay Mounting Type	Chassis Mount
Housing Features	
Relay Housing Style	Industry Standard
Dimensions	
Dimensions (L x W x H) (Approximate)	44.5 x 57x 30.2 mm[1.752 x 2.244 x 1.189 in]
Usage Conditions	
Operating Temperature Range	-30 – 80 °C
Operation/Application	
R-Switch & slimSSR Relays	No

## Product Compliance

#### For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant with Exemptions
EU ELV Directive 2000/53/EC	Compliant with Exemptions
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JUNE 2022 (224) SVHC > Threshold: Pb (88% in Component Part) Aticle Safe Usage Statements: Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

#### SSRD-240D40

Power Relays, Solid State, (2) x 1 Form A (SPST-NO), Chassis Mount, Potter & Brumfield SSRD



This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

# **Compatible Parts**



# Also in the Series | Potter & Brumfield SSRD



## Documents

**CAD** Files

Customer View Model

ENG\_CVM\_CVM\_1-1393030-6\_B1.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_1-1393030-6\_B1.3d\_stp.zip

English

Customer View Model

ENG\_CVM\_CVM\_1-1393030-6\_B1.2d\_dxf.zip

English

3D PDF

3D

#### SSRD-240D40

Power Relays, Solid State, (2) x 1 Form A (SPST-NO), Chassis Mount, Potter & Brumfield SSRD



By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Datasheets & Catalog Pages SSRD Dual AC Output Hockey Puck Solid State Relay With Paired SCR Outputs

English

SSR, SSRD and SSRT Series

English