


Economy Power 2.5 TE Internal #: 1-1969588-5 Housing, Receptacle, Wire-to-Wire, 15 Position, 2.5 mm [.098 in] Centerline, Crimp, 1 Row, Natural, Mating Retention, Wire & Cable, Economy Power 2.5

### View on TE.com >

Connectors > PCB Connectors > Wire-to-Board Connectors > Wire-to-Board Connector Assemblies & Housings

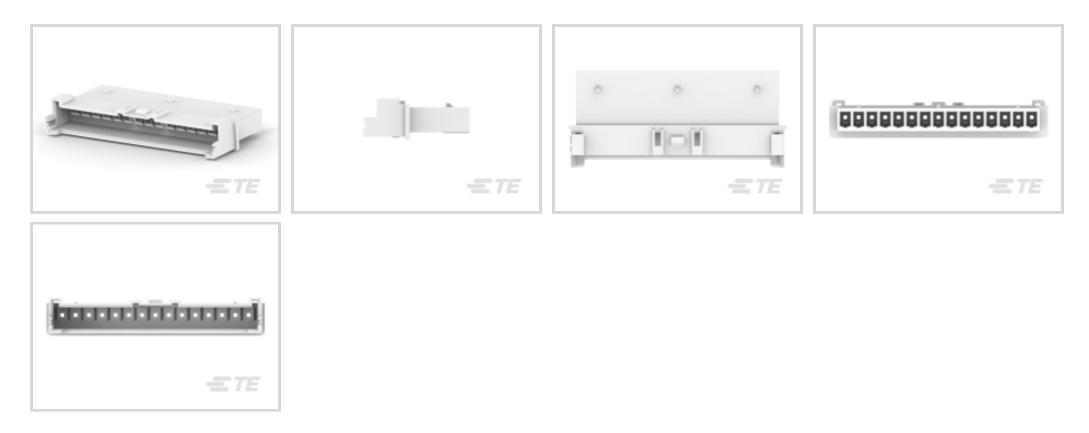

Connector Product Type: Housing Connector & Housing Type: Receptacle Connector System: Wire-to-Wire Number of Positions: 15

Centerline (Pitch): 2.5 mm [.098 in]

## Features



## Product Type Features

Connector Product Type	Housing
Connector & Housing Type	Receptacle
Connector System	Wire-to-Wire
Sealable	No
Connector & Contact Terminates To	Wire & Cable
Configuration Features	
Number of Positions	15
Number of Rows	1
Electrical Characteristics	
Operating Voltage	250 VAC
Contact Features	
Contact Type	Pin
Contact Base Material	Brass
Contact Current Rating (Max)	7.5 A

**C** For support call+1 800 522 6752

Housing, Receptacle, Wire-to-Wire, 15 Position, 2.5 mm [.098 in] Centerline, Crimp, 1 Row, Natural, Mating Retention, Wire & Cable, Economy Power 2.5



### **Termination Features**

rennination reatures	
Termination Method to Wire & Cable	Crimp
Mechanical Attachment	
Strain Relief	Without
Panel Mount Feature	Without
PCB Mount Retention	Without
Mating Retention Type	Latch
Mating Retention	With
Connector Mounting Type	Cable Mount (Free-Hanging)
Housing Features	
Housing Entry Configuration	Both Ends Closed
Housing Material	Nylon - GF
Centerline (Pitch)	2.5 mm[.098 in]
Housing Color	Natural
Dimensions	
Connector Length	40 mm[1.575 in]
Connector Height	6.6 mm[.26 in]
Connector Width	18.17 mm[.715 in]
Accepts Wire Insulation Diameter Range	1.3 – 1.7 mm[.051 – .067 in]
Wire Size	.13 – .33 mm²
Usage Conditions	
Operating Temperature Range	-25 – 105 °C[-13 – 221 °F]
Operation/Application	
Circuit Application	Power & Signal
Industry Standards	
Glow Wire Rating	Standard Part - Not Glow Wire
3	
UL Flammability Rating	UL 94V-0
UL Flammability Rating	UL 94V-0
	UL 94V-0 100

**C** For support call+1 800 522 6752

11/02/2022 05:58AM | Page 2

Housing, Receptacle, Wire-to-Wire, 15 Position, 2.5 mm [.098 in] Centerline, Crimp, 1 Row, Natural, Mating Retention, Wire & Cable, Economy Power 2.5



Comment

Free Hanging

# Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JUNE 2022 (224) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not reviewed for solder process capability

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

# **Compatible Parts**



Housing, Receptacle, Wire-to-Wire, 15 Position, 2.5 mm [.098 in] Centerline, Crimp, 1 Row, Natural, Mating Retention, Wire & Cable, Economy Power 2.5








TE Part # 1-1969588-3 HSG, REC, FREE-HANGING, SINGLE ROW,EP2.5



TE Part # 1-1969589-5 HSG, REC,FREE-HANG,GWT, SINGLE ROW,EP2.5

# Also in the Series | Economy Power 2.5

		Contraction of the second	
Insertion & Extraction Tools(1)	PCB Headers & Receptacles(408)	PCB Latches, Locks & Retainers(49)	Rectangular Power Connectors(43)

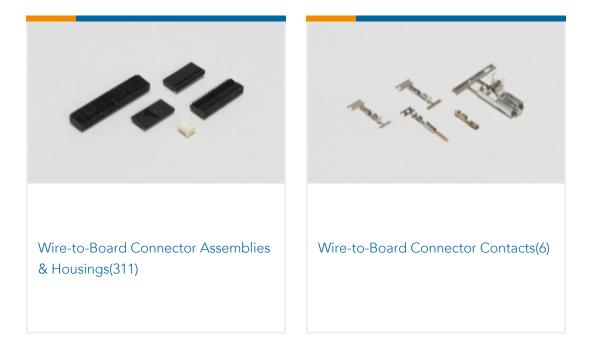

# Documents

**C** For support call+1 800 522 6752

Housing, Receptacle, Wire-to-Wire, 15 Position, 2.5 mm [.098 in] Centerline, Crimp, 1 Row, Natural, Mating Retention, Wire & Cable, Economy Power 2.5



Product Drawings HSG, REC, FREE-HANGING, SINGLE ROW, EP2.5

English

**CAD** Files

3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_1-1969588-5\_B.2d\_dxf.zip

English

Customer View Model

ENG\_CVM\_CVM\_1-1969588-5\_B.3d\_igs.zip

English

Customer View Model ENG\_CVM\_CVM\_1-1969588-5\_B.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

**Product Specifications** 

**Product Specification** 

English

Instruction Sheets Instruction Sheet (U.S.)

English

Agency Approvals UL Report

English