

Power Triple Lock TE Internal #: 1-1971875-7 Rectangular Power Connectors, Housing, Cap, Wire-to-Wire, 15 Position, 6 mm [.236 in] Centerline, Wire & Cable, UL 94V-0, Power Triple Lock

View on TE.com >



Connectors > Power Connectors > Rectangular Power > Rectangular Power Connectors > Standard Temperature Caps | POWER TRIPLE LOCK





Rectangular Power Connector Type: Housing

Connector & Housing Type: Cap

Connector System: Wire-to-Wire

Number of Positions: 15

Centerline (Pitch): 6 mm [.236 in]

All Standard Temperature Caps | POWER TRIPLE LOCK (40)

Features

Product Type Features

Rectangular Power Connector Type	Housing
Connector & Housing Type	Сар
Connector System	Wire-to-Wire
Sealable	No
Connector & Contact Terminates To	Wire & Cable
Configuration Features	
Number of Positions	15
Keying	A
Number of Power Positions	15
Number of Rows	3
Electrical Characteristics	
Operating Voltage	600 VDC

Rectangular Power Connectors, Housing, Cap, Wire-to-Wire, 15 Position, 6 mm [.236 in] Centerline, Wire & Cable, UL 94V-0, Power Triple Lock



Contact Features

Contact Layout	Matrix
Contact Retention Within Housing	Without
Contact Type	Tab
Termination Features	
Termination Method to Wire & Cable	Crimp
Mechanical Attachment	
Panel Mount Feature	With
Panel Mount Feature Type	Latches
Connector Mounting Type	Panel Mount
Housing Features	
Centerline (Pitch)	6 mm[.236 in]
Housing Color	Natural
Housing Material	PBT GF
Cable Exit Angle	Straight
Dimensions	
Row-to-Row Spacing	8.1 mm[.319 in]
Height	31.15 mm
Panel Thickness	1 – 2 mm[.039 – .079 in]
Usage Conditions	
Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]
Operation/Application	
Circuit Application	Power
Identification Marking	
Circuit Identification Feature	With
Industry Standards	
UL Flammability Rating	UL 94V-0
Glow Wire Rating	Standard Part - Not Glow Wire
UL Rating	Recognized
Agency/Standard Number	E28476
Agency/Standard	UL

Rectangular Power Connectors, Housing, Cap, Wire-to-Wire, 15 Position, 6 mm [.236 in] Centerline, Wire & Cable, UL 94V-0, Power Triple Lock



Packaging Features

Packaging Method	Carton
Other	
For Use With	CPA, Plug Housing, TPA, Tab Contact

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JUNE 2022 (224) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts




Rectangular Power Connectors, Housing, Cap, Wire-to-Wire, 15 Position, 6 mm [.236 in] Centerline, Wire & Cable, UL 94V-0, Power Triple Lock





Also in the Series | Power Triple Lock

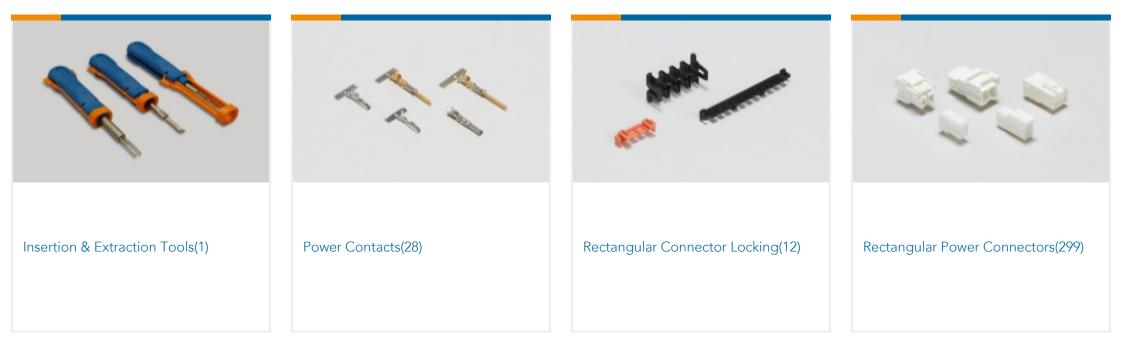

Documents

CAD Files 3D PDF

3D

.

Customer View Model

ENG_CVM_CVM_1-1971875-7_F.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1-1971875-7_F.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1-1971875-7_F.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages

1-1773734-9 TE Power Triple Lock Quick Reference Guide - German

German

9-1773465-1Power Triple Lock QRG

English

Product Specifications

Application Specification

English

Product Environmental Compliance

C For support call+1 800 522 6752

Rectangular Power Connectors, Housing, Cap, Wire-to-Wire, 15 Position, 6 mm [.236 in] Centerline, Wire & Cable, UL 94V-0, Power Triple Lock



TE Material Declaration

English

MD_1-1971875-7_05172018013_dmtec

English

MD_1-1971875-7_05172018013_dmtec

English