

M12 Rail Bulkhead PCB

TE Internal #: 1-2823589-3 Standard Circular Connectors, Cable-to-Cable, 4 Position, Sealable, Printed Circuit Board, Signal, Cable Mount (Free-Hanging), M12 Rail Bulkhead PCB

View on TE.com >



Connectors > Circular Connectors > Standard Circular Connectors > M12 PCB MOUNTED



Connector System: Cable-to-Cable Number of Positions: 4 Sealable: Yes Connector & Contact Terminates To: Printed Circuit Board Contact Current Rating (Max): 4A

All M12 PCB MOUNTED (12)

Features

Product Type Features

Product Type

Lead Assembly

Connector System	Cable-to-Cable
Sealable	Yes
Connector & Contact Terminates To	Printed Circuit Board
Circular Connector Type	Plug
Shell Type	Full Metal Shell
Configuration Features	
Number of Positions	4
Contacts Preloaded	Yes
Electrical Characteristics	
Operating Voltage	50 VDC
Body Features	
Environmental Protection Type	Elastomer Sealed
Environmental Protection	Yes
Weight	25 g[.0552 lb]
Shell Plating Material	Nickel

C For support call+1 800 522 6752

1-2823589-3

Standard Circular Connectors, Cable-to-Cable, 4 Position, Sealable, Printed Circuit Board, Signal, Cable Mount (Free-Hanging), M12 Rail Bulkhead PCB



Shell Base MaterialBrassCircular Connector Insulation Material TypeLow Fire Hazard ThermoplasticHermetically SealedYesContact FeaturesContact Current Rating (Max)Contact Current Rating (Max)4 ACircular Connector Contact TypePinMechanical AttachmentCable Mount (Free-Hanging)Polarization CodeDMating Alignment TypeKeyedMating RetentionWithUsege Conditions7IP Water Sealing Level6Operating Temperature Range-40 – 85 °C[-40 – 185 °F]Durability Rating250 Cycles		
Hermetically Sealed Yes Contact Features Contact Current Rating (Max) 4 A Circular Connector Contact Type Pin Mechanical Attachment Cable Mount (Free-Hanging) Polarization Code D Mating Alignment Type Keyed Mating Retention With Usage Conditions 7 IP Water Sealing Level 6 Operating Temperature Range -40 – 85 °C[-40 – 185 °F]	Shell Base Material	Brass
Contact Features Contact Current Rating (Max) 4 A Circular Connector Contact Type Pin Mechanical Attachment Cable Mount (Free-Hanging) Connector Mounting Type Cable Mount (Free-Hanging) Polarization Code D Mating Alignment Type Keyed Mating Retention With Usage Conditions 7 IP Water Sealing Level 6 Operating Temperature Range -40 – 85 °C[-40 – 185 °F] Operation/Application Sealer S	Circular Connector Insulation Material Type	Low Fire Hazard Thermoplastic
Contact Current Rating (Max) 4 A Circular Connector Contact Type Pin Mechanical Attachment Connector Mounting Type Connector Mounting Type Cable Mount (Free-Hanging) Polarization Code D Mating Alignment Type Keyed Mating Retention With Usage Conditions 7 IP Water Sealing Level 6 Operating Temperature Range -40 – 85 °C[-40 – 185 °F] Operation/Application Sealement	Hermetically Sealed	Yes
Circular Connector Contact Type Pin Mechanical Attachment Cable Mount (Free-Hanging) Connector Mounting Type Cable Mount (Free-Hanging) Polarization Code D Mating Alignment Type Keyed Mating Retention With Usage Conditions 7 IP Water Sealing Level 7 IP Dust Sealing Level 6 Operating Temperature Range -40 – 85 °C[-40 – 185 °F]	Contact Features	
Mechanical Attachment Connector Mounting Type Cable Mount (Free-Hanging) Polarization Code D Mating Alignment Type Keyed Mating Retention With Usage Conditions I IP Water Sealing Level 7 IP Dust Sealing Level 6 Operating Temperature Range -40 – 85 °C[-40 – 185 °F]	Contact Current Rating (Max)	4 A
Connector Mounting TypeCable Mount (Free-Hanging)Polarization CodeDMating Alignment TypeKeyedMating RetentionWithUsage ConditionsIP Water Sealing Level7IP Dust Sealing Level6Operating Temperature Range-40 – 85 °C[-40 – 185 °F]Operation/Application	Circular Connector Contact Type	Pin
Polarization Code D Mating Alignment Type Keyed Mating Retention With Usage Conditions IP Water Sealing Level 7 IP Dust Sealing Level 6 Operating Temperature Range -40 – 85 °C[-40 – 185 °F]	Mechanical Attachment	
Mating Alignment TypeKeyedMating RetentionWithUsage Conditions-IP Water Sealing Level7IP Dust Sealing Level6Operating Temperature Range-40 – 85 °C[-40 – 185 °F]Operation/Application-	Connector Mounting Type	Cable Mount (Free-Hanging)
Mating Retention With Usage Conditions 7 IP Water Sealing Level 7 IP Dust Sealing Level 6 Operating Temperature Range -40 – 85 °C[-40 – 185 °F]	Polarization Code	D
Usage Conditions IP Water Sealing Level 7 IP Dust Sealing Level 6 Operating Temperature Range -40 – 85 °C[-40 – 185 °F] Operation/Application -40 – 85 °C[-40 – 185 °F]	Mating Alignment Type	Keyed
IP Water Sealing Level 7 IP Dust Sealing Level 6 Operating Temperature Range -40 – 85 °C[-40 – 185 °F] Operation/Application -40 – 85 °C[-40 – 185 °F]	Mating Retention	With
IP Dust Sealing Level 6 Operating Temperature Range -40 - 85 °C[-40 - 185 °F] Operation/Application -40 - 85 °C[-40 - 185 °F]	Usage Conditions	
Operating Temperature Range -40 – 85 °C[-40 – 185 °F] Operation/Application	IP Water Sealing Level	7
Operation/Application	IP Dust Sealing Level	6
	Operating Temperature Range	-40 – 85 °C[-40 – 185 °F]
Durability Rating 250 Cycles	Operation/Application	
	Durability Rating	250 Cycles

Circuit Application	Signal
Shielded	Yes
Industry Standards	
UL Flammability Rating	UL 94V-0
Packaging Features	
Packaging Quantity	1
Other	
Field Serviceable	Yes
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant with Exemptions
EU ELV Directive 2000/53/EC	Not Yet Reviewed
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	

1-2823589-3

Standard Circular Connectors, Cable-to-Cable, 4 Position, Sealable, Printed Circuit Board, Signal, Cable Mount (Free-Hanging), M12 Rail Bulkhead PCB



Current ECHA Candidate List: JUNE 2022 (224)Candidate List Declared Against: JUNE 2022 (224) SVHC > Threshold:Pb (3.5% in Component Part) Article Safe Usage Statements: Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location. Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Halogen Content


Solder Process Capability

Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-onreach

Compatible Parts

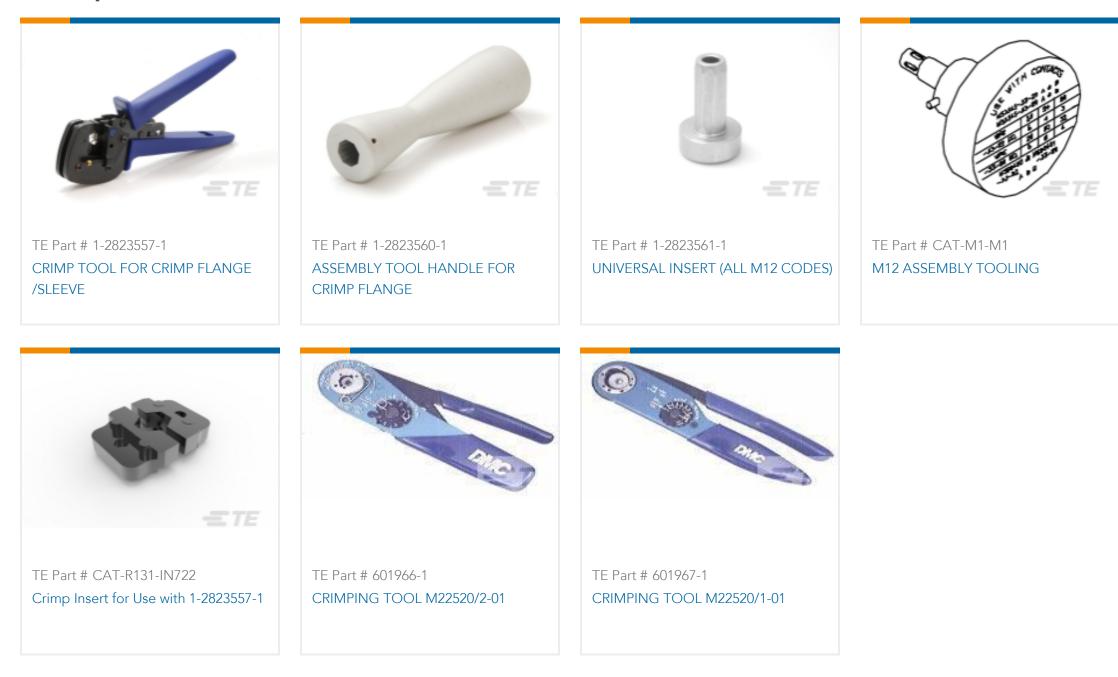

Also in the Series M12 Rail Bulkhead PCB

1-2823589-3

Standard Circular Connectors, Cable-to-Cable, 4 Position, Sealable, Printed Circuit Board, Signal, Cable Mount (Free-Hanging), M12 Rail Bulkhead PCB



Standard Circular Connectors(13)

Documents

Product Drawings M12 D-CODE 4,MALE REAR PANEL MOUNT

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1-2823589-3_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1-2823589-3_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1-2823589-3_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages M12 PCB Connector Flyer

English