


# AMP Signal Double Lock

TE Internal #: 2108641-1 Housing, Receptacle, Wire-to-Board, 11 Position, 2.5 mm [.098 in] Centerline, Crimp, 1 Row, Natural, Mating Retention, AMP Signal Double Lock

## View on TE.com >

Connectors > PCB Connectors > Wire-to-Board Connectors > Wire-to-Board Connector Assemblies & Housings >

STD Temp Signal Double Lock Header

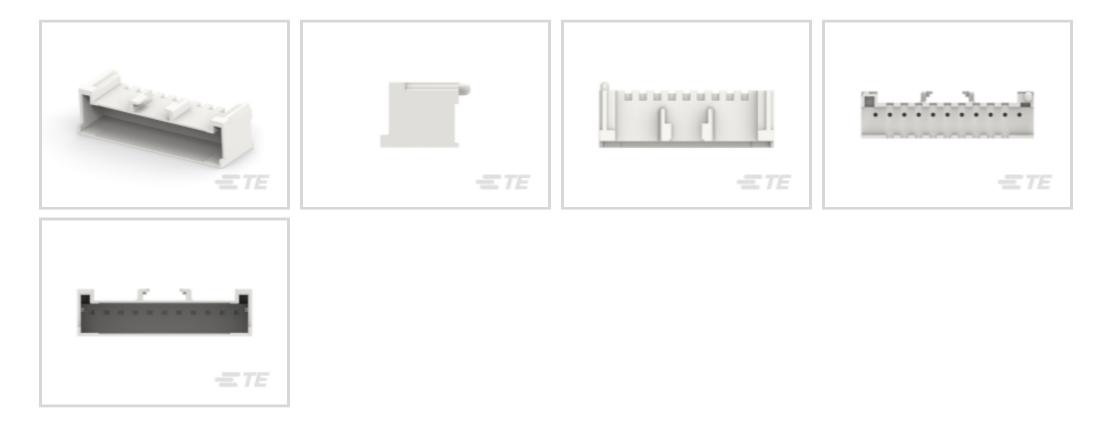

Connector Product Type: Housing

Connector & Housing Type: Receptacle

Connector System: Wire-to-Board

Number of Positions: 11

Centerline (Pitch): 2.5 mm [.098 in]

All STD Temp Signal Double Lock Header (6)



# Features

# **Product Type Features**

| Connector Product Type            | Housing               |  |  |  |
|-----------------------------------|-----------------------|--|--|--|
| Connector & Housing Type          | Receptacle            |  |  |  |
| Connector System                  | Wire-to-Board         |  |  |  |
| Sealable                          | No                    |  |  |  |
| Connector & Contact Terminates To | Printed Circuit Board |  |  |  |
| Configuration Features            |                       |  |  |  |
| Number of Positions               | 11                    |  |  |  |
| Number of Rows                    | 1                     |  |  |  |
| Electrical Characteristics        |                       |  |  |  |
| Operating Voltage                 | 50 VAC                |  |  |  |
| Body Features                     |                       |  |  |  |
|                                   |                       |  |  |  |

Housing, Receptacle, Wire-to-Board, 11 Position, 2.5 mm [.098 in] Centerline, Crimp, 1 Row, Natural, Mating Retention, AMP Signal Double Lock



| Connector Profile                     | Standard          |  |  |
|---------------------------------------|-------------------|--|--|
| Contact Features                      |                   |  |  |
| Contact Layout                        | Inline            |  |  |
| Contact Retention Within Housing      | With              |  |  |
| Contact Type                          | Tab               |  |  |
| Termination Features                  |                   |  |  |
| Termination Method to Wire & Cable    | Crimp             |  |  |
| Mechanical Attachment                 |                   |  |  |
| PCB Mount Alignment Type              | Boss              |  |  |
| Strain Relief                         | Without           |  |  |
| Contact Retention Type Within Housing | Double Lock Plate |  |  |
| PCB Mount Alignment                   | With              |  |  |
| PCB Mount Retention                   | Without           |  |  |
| Mating Retention Type                 | Latch             |  |  |
| Mating Retention                      | With              |  |  |
|                                       |                   |  |  |

# **Housing Features**

| Housing Material            | Nylon 6/6 GF               |  |  |  |
|-----------------------------|----------------------------|--|--|--|
| Centerline (Pitch)          | 2.5 mm[.098 in]            |  |  |  |
| Housing Color               | Natural                    |  |  |  |
| Dimensions                  |                            |  |  |  |
| Connector Length            | 30 mm[1.181 in]            |  |  |  |
| Connector Height            | 8.2 mm[.322 in]            |  |  |  |
| Usage Conditions            |                            |  |  |  |
| Operating Temperature Range | -30 – 105 °C[-22 – 221 °F] |  |  |  |
| Operation/Application       |                            |  |  |  |
| Circuit Application         | Power & Signal             |  |  |  |
| Packaging Features          |                            |  |  |  |
| Packaging Quantity          | 2000                       |  |  |  |
| Packaging Method            | Bag                        |  |  |  |

# **Product Compliance**

**C** For support call+1 800 522 6752

Housing, Receptacle, Wire-to-Board, 11 Position, 2.5 mm [.098 in] Centerline, Crimp, 1 Row, Natural, Mating Retention, AMP Signal Double Lock



#### For compliance documentation, visit the product page on TE.com>

| EU RoHS Directive 2011/65/EU                  | Compliant   |
|---|---|
| EU ELV Directive 2000/53/EC                   | Compliant   |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold   |
| EU REACH Regulation (EC) No. 1907/2006        | Current ECHA Candidate List: JUNE 2022<br>(224)<br>Candidate List Declared Against: JUNE<br>2022 (224)<br>Does not contain REACH SVHC |
| Halogen Content                               | Not Low Halogen - contains Br or Cl > 900<br>ppm.   |
| Solder Process Capability                     | Not reviewed for solder process capability  |

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-

# **Compatible Parts**





2.5MM SIGNAL MATE CONN HEADER



TE Part # 1376478-2 2.5 SMC HDR 2POS WHITE (LP)



TE Part # CAT-SI261-H342 STD Temp Signal Double Lock Header





Housing, Receptacle, Wire-to-Board, 11 Position, 2.5 mm [.098 in] Centerline, Crimp, 1 Row, Natural, Mating Retention, AMP Signal Double Lock



# Also in the Series | AMP Signal Double Lock

| A Contraction of the second se |                                    |   | Calledon and a second               |
|--|------------------------------------|---|-------------------------------------|
| Connector Contacts(8)  | Insertion & Extraction Tools(1)    | PCB Headers & Receptacles(145)            | PCB Latches, Locks & Retainers(17)  |
|  |                                    | And a |                                     |
| Rectangular Caps & Covers(1)   | Rectangular Connector Housings(23) | Rectangular Connector Locking(2)          | Rectangular Connector Seals(10)     |
|  |                                    |   | A AN AN                             |
| Rectangular Power Connectors(3)  | Standard Rectangular Connectors(1) | Wire-to-Board Connector Assemblies        | Wire-to-Board Connector Contacts(6) |

| Rectangular Power Connectors(3) | Standard Rectangular Connectors(1) | Wire-to-Board Connector Assemblies<br>& Housings(76) | Wire-to-Board Connector Contacts(6) |
|---------------------------------|------------------------------------|--|-------------------------------------|
|                                 |                                    |  |                                     |
|                                 |                                    |  |                                     |
|                                 |                                    |  |                                     |

# Documents

# CAD Files

# 3D PDF

3D

Customer View Model

### ENG\_CVM\_CVM\_2108641-1\_A.2d\_dxf.zip

English

Customer View Model

ENG\_CVM\_CVM\_2108641-1\_A.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_2108641-1\_A.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

**Product Specifications** 

Product Specification

**C** For support call+1 800 522 6752

Housing, Receptacle, Wire-to-Board, 11 Position, 2.5 mm [.098 in] Centerline, Crimp, 1 Row, Natural, Mating Retention, AMP Signal Double Lock



English