
2227671-3 - ACTIVE

zQSFP+/QSFP28 TE Internal #: 2227671-3 QSFP, QSFP+ & zQSPF+, Cage Assembly with Integrated Connector, 2 x 3, Internal/External EMI Springs, Included Lightpipe, Standard, zQSFP+/QSFP28

View on TE.com >

Connectors > Pluggable IO Connectors & Cages > QSFP, QSFP+ & zQSPF+

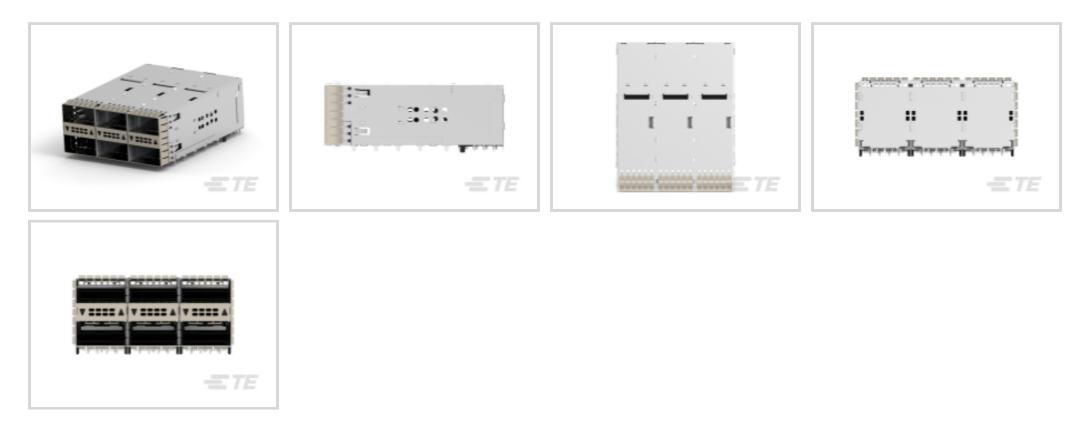

Pluggable I/O Product Type: Cage Assembly with Integrated Connector

Port Matrix Configuration: 2x3

EMI Containment Feature Type: Internal/External EMI Springs

Included Lightpipe: Yes

Enhancements: Standard

Features

TE connectivity

Product Type Features

Form Factor	zQSFP+	
Cage Туре	Stacked	
Pluggable I/O Product Type	Cage Assembly with Integrated Connector	
Connector System	Cable-to-Board	
Sealable	No	
Connector & Contact Terminates To	Printed Circuit Board	
Configuration Features		
Port Matrix Configuration	2 x 3	
Number of Ports	6	
Lightpipe Configuration	Outer Left Indicator Down	
Number of Rear EONs per Port Column	3	
Number of Positions	228	
Electrical Characteristics		
Data Rate (Max)	28 Gb/s	

2227671-3

QSFP, QSFP+ & zQSPF+, Cage Assembly with Integrated Connector, 2 x 3, Internal /External EMI Springs, Included Lightpipe, Standard, zQSFP+/QSFP28



Contact Features

Contact Mating Area Plating Material Thickness	.76 μm[30 μin]	
Contact Mating Area Plating Material	Gold	
Contact Underplating Material	Tin	
PCB Contact Termination Area Plating Material	Gold	
Contact Current Rating (Max)	.5 A	
Termination Features		
Termination Post & Tail Length	2 mm[.079 in]	
Termination Method to Printed Circuit Board	Through Hole - Press-Fit	
Mechanical Attachment		
Connector Mounting Type	Board Mount	
Housing Features		
Housing Features Cage Material	Nickel Silver	
	Nickel Silver .8 mm[.032 in]	
Cage Material		
Cage Material Centerline (Pitch)		

Usage Conditions

~ .		-
()nerating	Temperature	Range
operating	remperature	Runge

-55 – 105 °C[-67 – 221 °F]

Operation/Application	
Heat Sink Compatible	No
For Use With Pluggable I/O Products	QSFP Cable Assembly, QSFP MSA Compatible Transceiver
Pluggable I/O Applications	SFP+ Stacked Belly-to-Belly
Circuit Application	Signal
Industry Standards	
UL Flammability Rating	UL 94V-0
Packaging Features	
Packaging Method	Box & Tray
Other	
EMI Containment Feature Type	Internal/External EMI Springs
Included Lightpipe	Yes

2227671-3

QSFP, QSFP+ & zQSPF+, Cage Assembly with Integrated Connector, 2 x 3, Internal /External EMI Springs, Included Lightpipe, Standard, zQSFP+/QSFP28



Enhancements

Standard

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JUNE 2022 (224) Does not contain REACH SVHC
Halogen Content	Low Bromine/Chlorine - Br and Cl < 900 ppm per homogenous material. Also BFR /CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts



Also in the Series | zQSFP+/QSFP28

2227671-3

QSFP, QSFP+ & zQSPF+, Cage Assembly with Integrated Connector, 2 x 3, Internal /External EMI Springs, Included Lightpipe, Standard, zQSFP+/QSFP28





Documents

Product Drawings

zQSFP+ STACKED RECEPTACLE ASSEMBLY 2X3

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_2227671-3_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_2227671-3_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2227671-3_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages QSFP28/56 and zQSFP+ Interconnects

English

Product Specifications Application Specification

English