2-1971906-3 ACTIVE

GRACE INERTIA 3.3

TE Internal #: 2-1971906-3

Rectangular Power Connectors, Header, Plug, Wire-to-Board, 6 Position, 3.3 mm [.129 in] Centerline, Printed Circuit Board, UL 94V-

0, GRACE INERTIA 3.3

View on TE.com >




Connectors > Power Connectors > Rectangular Power > Rectangular Power Connectors









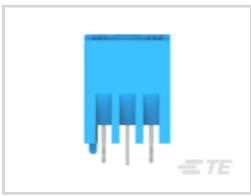

Rectangular Power Connector Type: Header

Connector & Housing Type: Plug
Connector System: Wire-to-Board

Number of Positions: 6

Centerline (Pitch): 3.3 mm [.129 in]

Features

Product Type Features

| Header Type | Fully Shrouded |
|-----------------------------------|-----------------------|
| Rectangular Power Connector Type | Header |
| Connector & Housing Type | Plug |
| Connector System | Wire-to-Board |
| Sealable | No |
| Connector & Contact Terminates To | Printed Circuit Board |
| Configuration Features | |
| Number of Positions | 6 |
| Keying | В |
| PCB Mount Orientation | Vertical |
| Number of Power Positions | 6 |
| Number of Rows | 2 |
| Electrical Characteristics | |

| Operating Voltage | 250 VDC | |
|-------------------|---------|--|



Contact Features

| Contact Layout | Matrix |
|------------------------------------------------|--------------------|
| Contact Underplating Material | Nickel |
| Contact Base Material | Brass |
| Contact Current Rating (Max) | 4 A |
| Contact Retention Within Housing | Without |
| Contact Type | Pin |
| PCB Contact Termination Area Plating Material | Tin |
| Contact Mating Area Plating Material | Tin |
| Contact Mating Area Plating Material Thickness | 2 μm[78.74 μin] |
| Underplate Material Thickness | 1.25 μm[49.21 μin] |
| Contact Termination Area Plating Thickness | 2 μm[78.74 μin] |
| Tab Width | .5 mm[.02 in] |

Termination Features

| Termination Post & Tail Length | 3 mm[.118 in] |
|---------------------------------------------|-----------------------|
| Termination Method to Printed Circuit Board | Through Hole - Solder |

Mechanical Attachment

| PCB Mount Alignment Type | Locating Posts |
|--------------------------|----------------|
| Mating Alignment Type | Keyed |
| Mating Alignment | With |
| PCB Mount Alignment | With |
| PCB Mount Retention | With |
| PCB Mount Retention Type | Kinked |
| Connector Mounting Type | Board Mount |
| Mating Retention | With |
| Mating Retention Type | Latch |
| | |

Housing Features

| Centerline (Pitch) | 3.3 mm[.129 in] |
|--------------------|-----------------|
| Housing Color | Blue |
| Housing Material | PA 66 GF |

Dimensions

| Row-to-Row Spacing 5.2 mm[.205 in] | Row-to-Row Spacing | 5.2 mm[.205 in] |
|------------------------------------|--------------------|-----------------|
|------------------------------------|--------------------|-----------------|



| PCB Thickness (Recommended) | 1.6 mm[.06 in] |
|-----------------------------|----------------------------|
| Mating Post Length | 6.6 mm[.26 in] |
| Height | 14.25 mm[.561 in] |
| Length | 12 mm[.47 in] |
| Usage Conditions | |
| Operating Temperature Range | -30 - 105 °C[-22 - 221 °F] |
| Operation/Application | |
| Circuit Application | Power |
| Industry Standards | |
| UL Flammability Rating | UL 94V-0 |
| Glow Wire Rating | GWT 750°C (Without Flame) |
| Packaging Features | |
| Packaging Method | Tray |
| Packaging Quantity | 300 |
| Other | |

Product Compliance

For Use With

For compliance documentation, visit the product page on TE.com>

| EU RoHS Directive 2011/65/EU | Compliant |
|-----------------------------------------------|---------------------------------------------------------------------------------------------------------------------------|
| EU ELV Directive 2000/53/EC | Compliant |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold |
| EU REACH Regulation (EC) No. 1907/2006 | Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JUNE 2022 (224) Does not contain REACH SVHC |
| Halogen Content | Not Low Halogen - contains Br or Cl > 900 ppm. |
| Solder Process Capability | Not reviewed for solder process capability |

Plug Housing

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products




will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts



Also in the Series | GRACE INERTIA 3.3

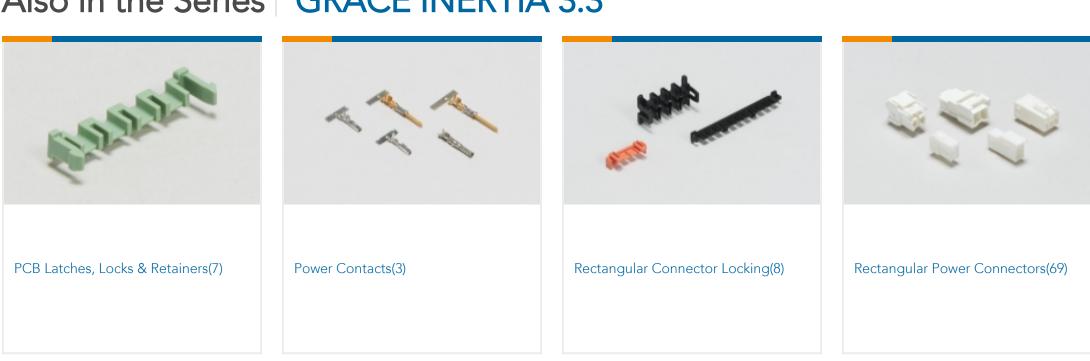

Documents

Product Drawings

HEADER ASSY 6POS, KEYING-B, NEW GIC3.3

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_2-1971906-3_A_c-2-1971906-3-a.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_2-1971906-3_A_c-2-1971906-3-a.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2-1971906-3_A_c-2-1971906-3-a.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use



Datasheets & Catalog Pages

5-1773465-4-GI3.3Flyer

English

7-1773465-7-GI3.3-ChineseFlyer

GI3.3_QRG_CN

Product Specifications

Application Specification

English

Product Environmental Compliance

TE Material Declaration

English

Agency Approvals

UL Report

English