PLASTI-GRIP


TE Internal #: 2-32950-1

Ring Terminals & Spade Terminals, Ring Tongue, 22 AWG Wire Size, .3 – 1.42 mm² Wire Size, 509 – 3260 CMA Wire Size, Stud Size #6 / M3.5, PLASTI-GRIP

View on TE.com >



Terminals & Splices > Ring Terminals & Spade Terminals

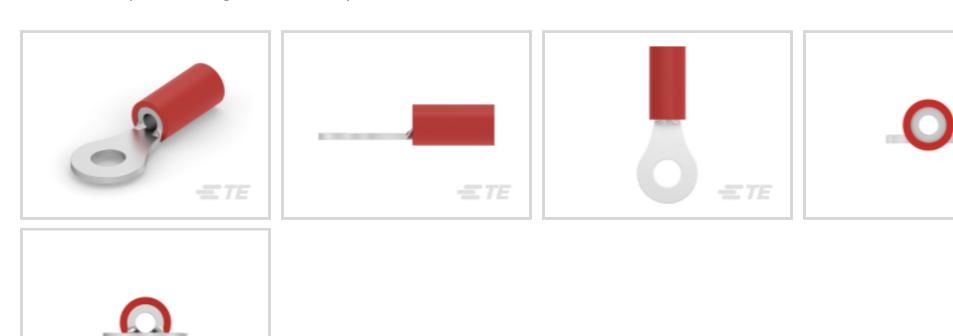

Ring & Spade Terminal Type: Ring Tongue

Wire Size: **509 – 3260 CMA**

Stud Size: **#6, M3.5**

Features

Product Type Features

Froduct Type realures	
Shape Description	RING-043
Stud Size	#6, M3.5
Sealable	No
Wire Insulation Support Retention Type	Insulation Support
Configuration Features	
Number of Holes	1
Terminal Angle	180 °
Electrical Characteristics	
Voltage (Max)	600 V
Body Features	
Inspection Slot	No
Insulation Sleeve Color	Red
Weight per Piece	.155 g
Stripe Color	Red
Contact Features	



Pina & Spada Tarminal Tuna	Ping Tongue
Ring & Spade Terminal Type	Ring Tongue
Barrel Type	Closed
Terminal Orientation	Straight
Terminal Plating Material	Tin
Mechanical Attachment	
Wire Insulation Support	With
Dimensions	
Wire Size	509 – 3260 CMA
Stud Diameter	3.68 mm[.145 in]
Tongue Thickness	.79 mm[.031 in]
Overall Product Length	21.74 mm[.856 in]
Accepts Wire Insulation Diameter (Max)	3.18 mm[.125 in]
Accepts Wire Insulation Diameter Range	2.03 – 3.18 mm[.08 – .125 in]
Usage Conditions	
	Partially Insulated
Usage Conditions	
Usage Conditions Insulation Option	Partially Insulated
Usage Conditions Insulation Option Operating Temperature Range	Partially Insulated
Usage Conditions Insulation Option Operating Temperature Range Operation/Application	Partially Insulated 105 °C[221 °F]
Usage Conditions Insulation Option Operating Temperature Range Operation/Application Compatible With Wire Base Material	Partially Insulated 105 °C[221 °F] Copper
Usage Conditions Insulation Option Operating Temperature Range Operation/Application Compatible With Wire Base Material Compatible With Wire Plating Material	Partially Insulated 105 °C[221 °F] Copper Tin
Usage Conditions Insulation Option Operating Temperature Range Operation/Application Compatible With Wire Base Material Compatible With Wire Plating Material Heavy Duty	Partially Insulated 105 °C[221 °F] Copper Tin
Usage Conditions Insulation Option Operating Temperature Range Operation/Application Compatible With Wire Base Material Compatible With Wire Plating Material Heavy Duty Industry Standards	Partially Insulated 105 °C[221 °F] Copper Tin No
Usage Conditions Insulation Option Operating Temperature Range Operation/Application Compatible With Wire Base Material Compatible With Wire Plating Material Heavy Duty Industry Standards Government Qualified	Partially Insulated 105 °C[221 °F] Copper Tin No

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	



Current ECHA Candidate List: JUNE 2022

(224)

Candidate List Declared Against: JAN 2022

(223)

Does not contain REACH SVHC

Halogen Content

Not Low Halogen - contains Br or Cl > 900 ppm.

Solder Process Capability

Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts











Also in the Series | PLASTI-GRIP









Crimp Wire Pins, Tabs & Ferrules(25)



Ring Terminals & Spade Terminals(537)



Documents

Product Drawings

PG R 22-16 COMM 22-18 MIL 6

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_2-32950-1_M.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_2-32950-1_M.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2-32950-1_M.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications

Application Specification

English