

SOLISTRAND

TE Internal #: 31819

Splices, 16 - 14 AWG Wire Size, 1.25 - 2 mm² Wire Size, Standard, .


085 in [2.16 mm] Barrel Inside Diameter, 2050 – 5180 CMA Wire

Size, Copper

View on TE.com >



Terminals & Splices > Splices

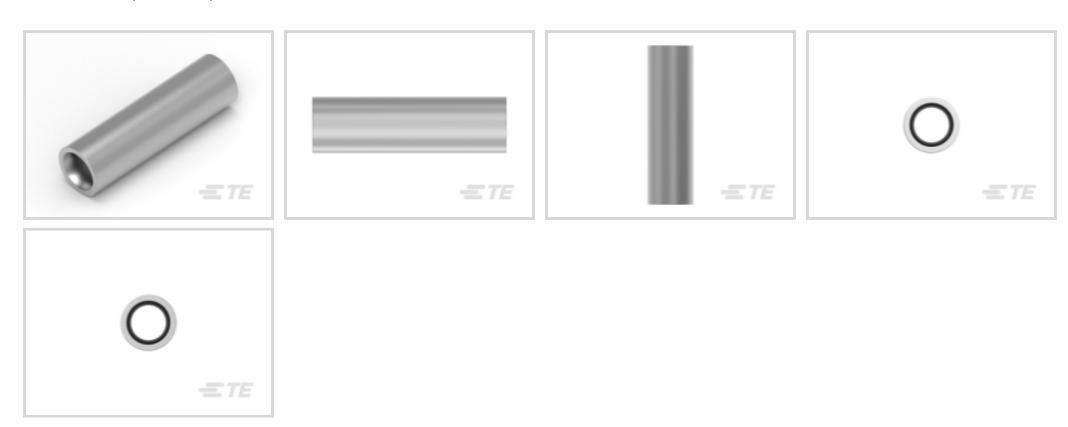

Wire Size: 1.25 – 2 mm²

Sealable: No

Splice Features: Standard

Barrel Inside Diameter: 2.16 mm [.085 in]

Features

Product Type Features

Splice Accessory Type	Splice
Sealable	No
Splice Type	Butt Splice
Serrated	Yes
Compatible With Discrete Wire Type	Solid, Stranded
Wire Insulation Support Retention Type	Non-Insulation Support
Configuration Features	
Number of Serrations	16
Compatible With Wire & Cable Type	Discrete Wire
Compatible With Wire & Cable Type Body Features	Discrete Wire
	Discrete Wire .991 g
Body Features	
Body Features Weight per Piece	.991 g



Contact Features

	100 μin
Contact Plating Material	Tin
Barrel Type	Closed
Mechanical Attachment	

iviecnanical Attachment

Wire Insulation Support	Without
vine insulation support	VVICIOGE

Dimensions

Outside Diameter	4.19 mm[.165 in]
Wire Size	2050 – 5180 CMA
Barrel Inside Diameter	2.16 mm[.085 in]
Terminal Material Thickness	.84 mm[.033 in]
Overall Product Length	14.4 mm[.567 in]

Usage Conditions

Insulation Option	Uninsulated
Operating Temperature Range	170 °C[338 °F]

Operation/Application

Heavy Duty	No
Compatible With Wire Base Material	Copper

Industry Standards

Government Qualified Splice	No	
-----------------------------	----	--

Packaging Features

Packaging Quantity	500
Packaging Method	Loose Piece

Other

Military Category	No	

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	



Current ECHA Candidate List: JUNE 2022

(224)

Candidate List Declared Against: JUNE

2022 (224)

Does not contain REACH SVHC

Halogen Content

Low Halogen - Br, Cl, F, I < 900 ppm per
homogenous material. Also BFR/CFR/PVC
Free

Solder Process Capability

Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts





















TE Part # 58545-4 SOLISTRAND 10-22 DIE ASSY.

Documents

Product Drawings SPLICE, SOLIS BUTT 16-14

English

CAD Files

Customer View Model

ENG_CVM_CVM_31819_U.2d_dxf.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_31819_U.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_31819_U.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages

SOLISTRAND - QRG

English

Product Environmental Compliance

MD_31819_04122018251_dmtec

English

MD_31819_04122018251_dmtec

English

Agency Approvals

UL Report

English

UL Report

English