

STRATO-THERM DIAMOND GRIP

TE Internal #: 322825


Splices, 16 – 14 AWG Wire Size, 1.04 – 2.62 mm² Wire Size, Strap, 2.05 – 5.18 kcmil Wire Size, 2050 – 5180 CMA Wire Size, STRATO-

THERM DIAMOND GRIP

View on TE.com >



Terminals & Splices > Splices

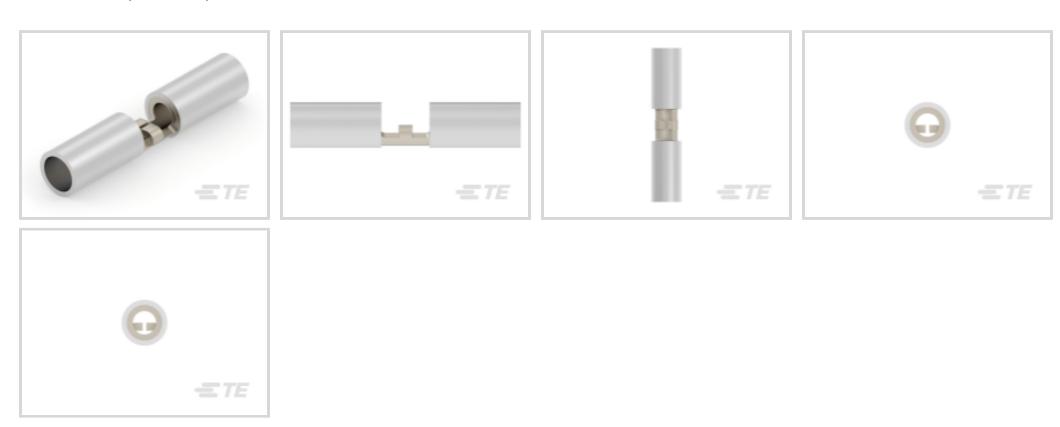

Wire Size: 1.04 – 2.62 mm²

Sealable: No

Splice Features: Strap

Accepts Wire Insulation Diameter Range: 4.31 mm [.17 in]

Features

Product Type Features

Sealable	No
Splice Type	Butt Splice
Serrated	Yes
Compatible With Discrete Wire Type	Stranded
Wire Insulation Support Retention Type	Insulation Support
Configuration Features	

Compatible With Wire & Cable Type

Body Features	
Weight per Piece	1.345 g
Plating Material	Nickel
Splice Features	Strap

Discrete Wire

Copper

Contact Features

Primary Product Material

Barrel Type	Closed	



Mechanical Attachment

Wire Insulation Support	With
Dimensions	
Wire Size	2050 – 5180 CMA
Accepts Wire Insulation Diameter Range	4.31 mm[.17 in]
Overall Product Length	22.58 mm[.889 in]
Usage Conditions	
High Temperature Rating	343 °C[650 °F]
Insulation Option	Uninsulated
Operating Temperature Range	343 °C[650 °F]
Operation/Application	
Heavy Duty	No
Compatible With Wire Base Material	Copper
Industry Standards	
Government Qualified Splice	No
Packaging Features	
Packaging Quantity	1000
Packaging Method	Loose Piece
Other	
Military Category	No

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JAN 2022 (223) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free



Solder Process Capability

Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts





Also in the Series | STRATO-THERM DIAMOND GRIP







Documents

Product Drawings

DIAMOND GRIP 16-14 HR BUTT

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_322825_H.2d_dxf.zip

English



Customer View Model

ENG_CVM_CVM_322825_H.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_322825_H.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages

STRATO-THERM Terminals & Splices for High Temperature Applications

English

Product Specifications

Application Specification

English