

DIAMOND GRIP

TE Internal #: 328500


Ring Terminals & Spade Terminals, Rectangular Tongue, 22 – 16 AWG Wire Size, .26 – 1.65 mm² Wire Size, 509 – 3260 CMA Wire

Size, Stud Size M3 / #5

View on TE.com >



Terminals & Splices > Ring Terminals & Spade Terminals

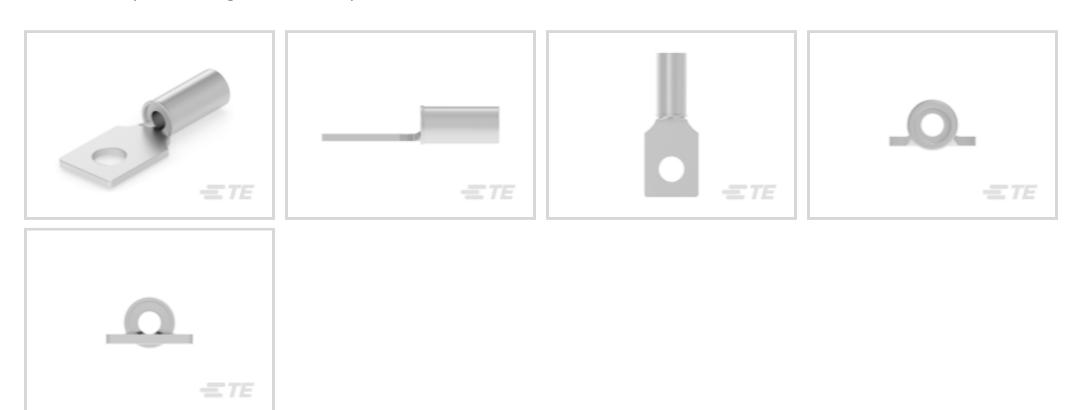

Ring & Spade Terminal Type: Rectangular Tongue

Wire Size: **509 – 3260 CMA**

Stud Size: #5, M3

Features

Product Type Features

Product Type Features	
Shape Description	RING-055
Stud Size	#5, M3
Sealable	No
Wire Insulation Support Retention Type	Insulation Support
Configuration Features	
Number of Holes	1
Terminal Angle	180°
Body Features	
Inspection Slot	No
Weight per Piece	.81 g
Contact Features	
Ring & Spade Terminal Type	Rectangular Tongue
Barrel Type	Closed

Straight

Tin

Terminal Orientation

Terminal Plating Material



Mechanical Attachment

Wire Insulation Support	With
Dimensions	
Wire Size	509 – 3260 CMA
Stud Diameter	3.35 mm[.132 in]
Tongue Thickness	.79 mm[.031 in]
Overall Product Length	19.96 mm[.786 in]
Accepts Wire Insulation Diameter (Max)	3.56 mm[.14 in]
Accepts Wire Insulation Diameter Range	2.67 – 3.56 mm[.105 – .14 in]
Usage Conditions	
Insulation Option	Uninsulated
Operating Temperature Range	170 °C[338 °F]
Operation/Application	170 °C[338 °F]
	170 °C[338 °F] Copper
Operation/Application	
Operation/Application Compatible With Wire Base Material	Copper
Operation/Application Compatible With Wire Base Material Compatible With Wire Plating Material	Copper
Operation/Application Compatible With Wire Base Material Compatible With Wire Plating Material Heavy Duty	Copper
Operation/Application Compatible With Wire Base Material Compatible With Wire Plating Material Heavy Duty Industry Standards	Copper Tin No
Operation/Application Compatible With Wire Base Material Compatible With Wire Plating Material Heavy Duty Industry Standards Government Qualified	Copper Tin No

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JUNE 2022 (224) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC



Free

Solder Process Capability

Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts



Documents

Product Drawings

DG RECT 22-16COMM 22-18MIL 5

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_328500_D.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_328500_D.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_328500_D.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use

Instruction Sheets

Ring Terminals & Spade Terminals, Rectangular Tongue, 22-16 AWG Wire Size, .26-1.65 mm² Wire Size, .509-3260 CMA Wire Size, Stud Size M3 / #5



Instruction Sheet (U.S.)

English

AMP Diamond Grip Terminals for Bu-Ship Terminal Blocks

English

Agency Approvals

UL Report

English