
MTA306D 🗸 ACTIVE

Alcoswitch

TE Internal #: 3-1437558-5 Toggle Switches, Three Pole - Double Throw Configuration (Pole-Throw), 1/4-40, Sealed, Copper Alloy, Gold Flash over Silver View on TE.com >



Relays, Contactors & Switches > Switches > Toggle Switches

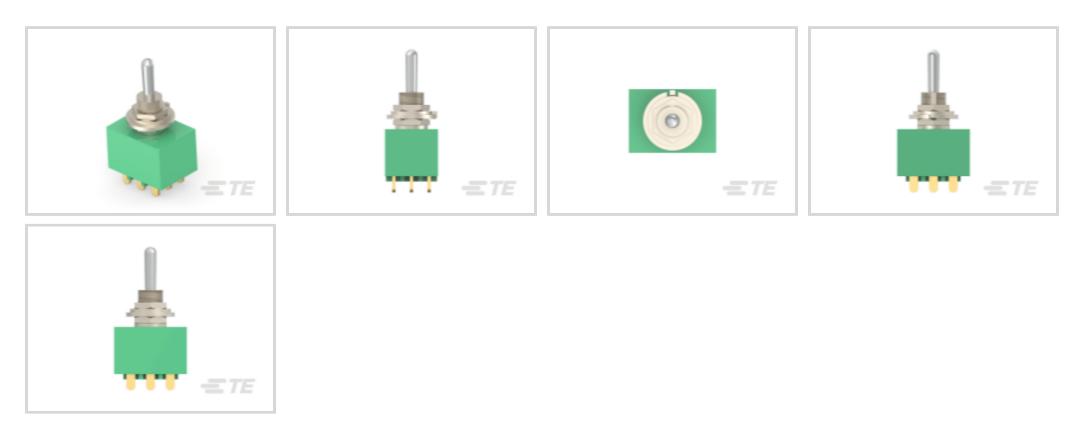

Configuration (Pole-Throw): Three Pole - Double Throw

Bushing Thread Size: 1/4-40

Sealed Device: Yes

Contact Base Material: Copper Alloy

Switch Contact Plating Material: Gold Flash over Silver

Features

Product Type Features

| Product Type | Switch |
|------------------------------|---------------------------|
| Sealed Device | Yes |
| Toggle Style | Baton Long |
| Toggle Switch Type | Toggle |
| Toggle Actuation | Vertical |
| Configuration Features | |
| Configuration (Pole-Throw) | Three Pole - Double Throw |
| Operating Function | On None On |
| Electrical Characteristics | |
| Dielectric Strength | 1500 VAC |
| UL/CSA Current Rating (125V) | 6 A |
| Insulation Resistance | 1000 MΩ |
| UL/CSA Current Rating (250V) | 3 A |
| Contact Resistance | 10 mΩ |

MTA306D

Toggle Switches, Three Pole - Double Throw Configuration (Pole-Throw), 1/4-40, Sealed, Copper Alloy, Gold Flash over Silver



| Toggle Switch Voltage Rating | 28 VDC |
|--------------------------------------|-------------------------------|
| Body Features | |
| Actuator Finish | Chrome |
| Color | Green |
| Bushing Thread Size | 1/4-40 |
| Toggle Switch Seal Type | Terminal Seal (Insert Molded) |
| Bushing Style | Threaded |
| Contact Features | |
| Contact Base Material | Copper Alloy |
| Switch Contact Plating Material | Gold Flash over Silver |
| Toggle Switch Contact Current Rating | 6 A |
| Termination Features | |
| Termination Type | Vertical, Wire Lugs |
| Mechanical Attachment | |
| Toggle Switch Mounting Type | Panel |
| Housing Features | |
| Process Sealed | No |

Dimensions

| Toggle Length | 10.49 mm[.413 in] |
|---|--|
| Industry Standards | |
| UL Flammability Rating | UL 94V-0 |
| Other | |
| Comment | UL available when ordering - consult factory. |
| Product Compliance For compliance documentation, visit the product page on TE.com> | |
| EU RoHS Directive 2011/65/EU | Not Compliant |
| EU ELV Directive 2000/53/EC | Compliant |
| China RoHS 2 Directive MIIT Order No 32, 2016 | Restricted Materials Above Threshold |
| EU REACH Regulation (EC) No. 1907/2006 | Current ECHA Candidate List: JUNE 2022 (224) |

MTA306D

Toggle Switches, Three Pole - Double Throw Configuration (Pole-Throw), 1/4-40, Sealed, Copper Alloy, Gold Flash over Silver



Candidate List Declared Against: JUNE 2022 (224) SVHC > Threshold: 1,6,7,8,9,14,15,16,17,17,18,18dodecachloropentacyclo [12.2.1.16,9.02,13.05,10]octadeca-7,15diene (Dechlorane Plus) (1.22% in Component Part) Pb (.6% in Component Part) Attice Safe Usage Statements: Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Do not handle until all safety precautions have been read and understood. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.

ppm.

Solder Process Capability


Halogen Content

Wave solder capable to 265°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts

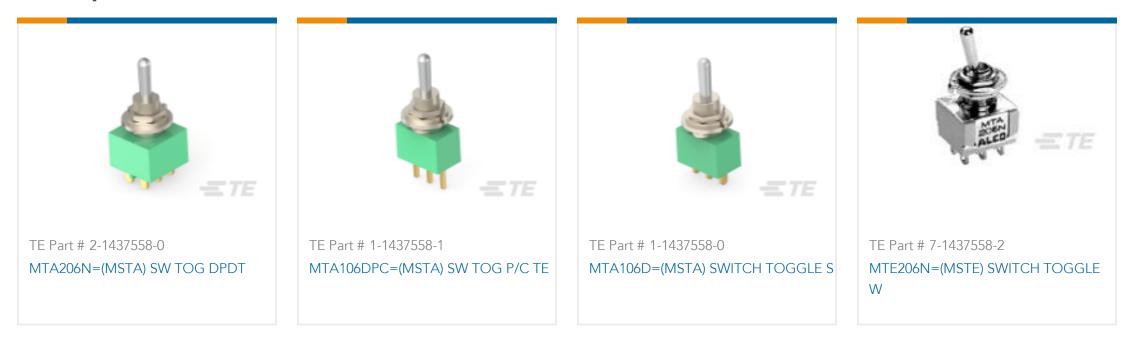



MTA306D

Toggle Switches, Three Pole - Double Throw Configuration (Pole-Throw), 1/4-40, Sealed, Copper Alloy, Gold Flash over Silver



Documents

Product Drawings MTA306D=(MSTA) SW TOG 3PDT

English

CAD Files

Customer View Model ENG_CVM_CVM_3-1437558-5_F1.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_3-1437558-5_F1.3d_stp.zip

English

Customer View Model

ENG_CVM_CVM_3-1437558-5_F1.2d_dxf.zip

English

3D PDF

3D

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages 2-1773458-6_GREEN_SERIES_SWITCHES

English