




Alcoswitch

TE Internal #: 3-1437597-6

Keylock Switches, Single Pole - Single Throw Configuration (Pole-Throw), Zinc Alloy, Remove Key Position 2, Hand Soldering Type

[View on TE.com >](#)

Relays, Contactors & Switches > Switches > Keylock Switches

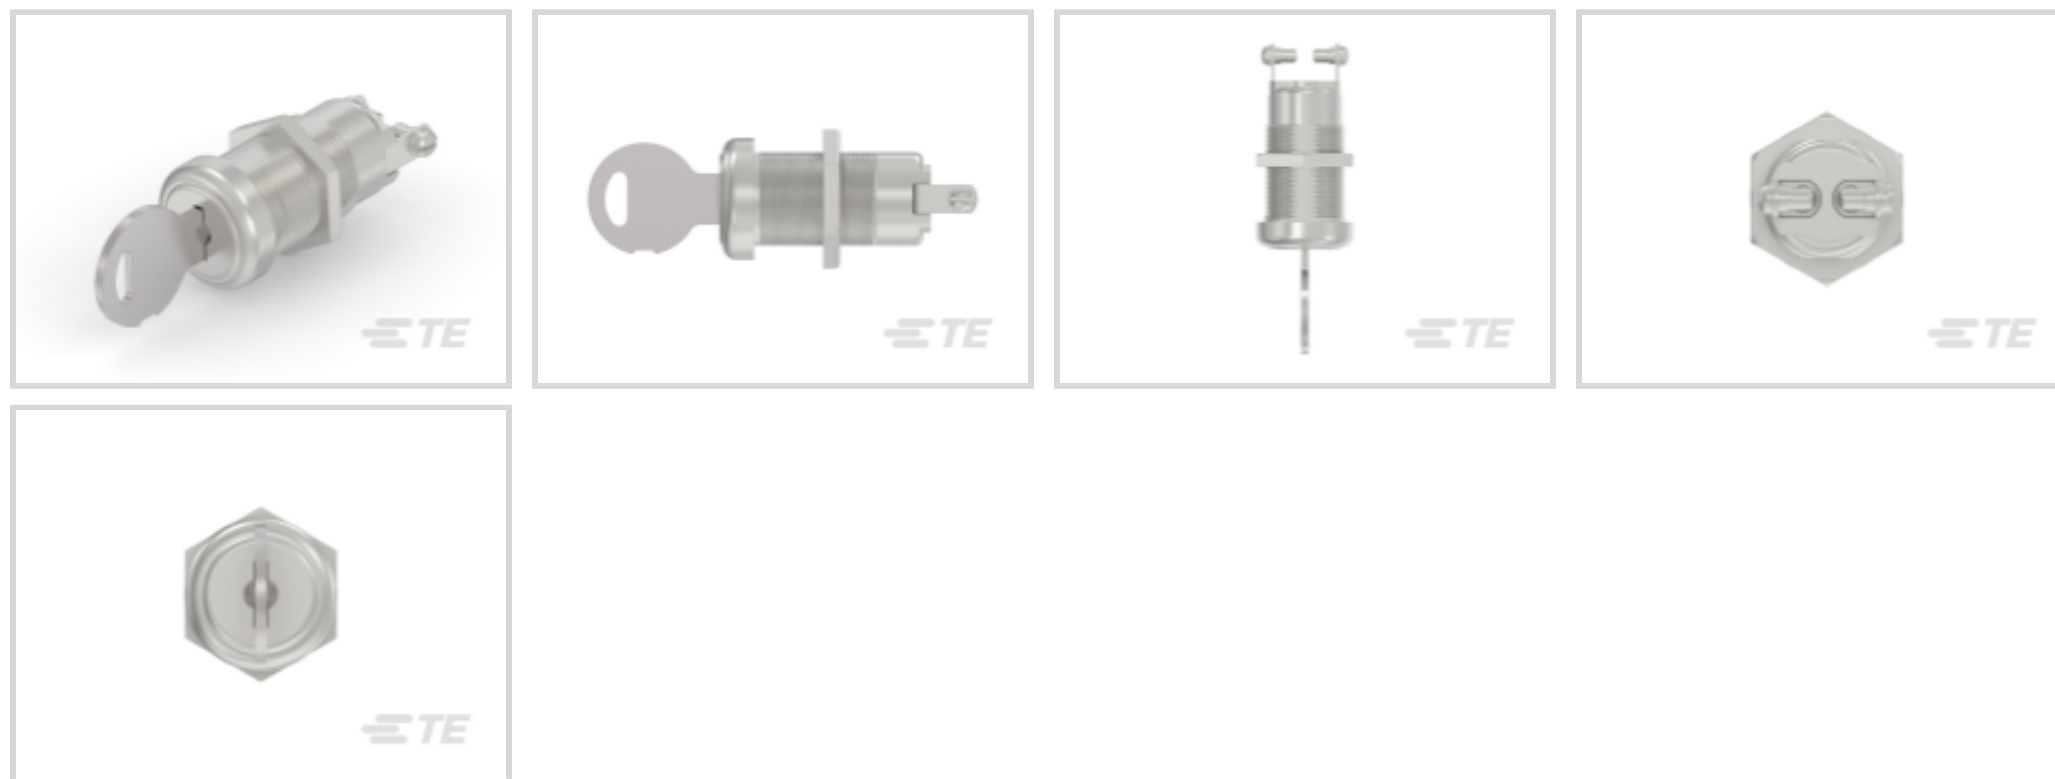

Configuration (Pole-Throw): **Single Pole - Single Throw**

Cylinder Material: **Zinc Alloy**

Remove Key: **Position 2**

Soldering Type: **Hand**

Operating Function: **Position 1 On, Position 2 Off**

**Features**

**Product Type Features**

Product Type	Switch
Switch Type	Key Lock
Illuminated	No
Frame Material	Polished Chrome

**Configuration Features**

Configuration (Pole-Throw)	Single Pole - Single Throw
Operating Function	Position 1 On, Position 2 Off
Panel Cutout Size	19.3 x 17.7 mm [.76 x .64 in]
Number of Keylock Switch Positions	2

**Electrical Characteristics**

Dielectric Strength	1000 VAC
Contact Resistance	50 mΩ
Keylock Switch Voltage Rating	115 VAC

**Body Features**

--	--



Actuator Travel	90°
Key Changes	25 Standard
Actuator Material	Brass

#### Contact Features

Contact Timing	Non-Shorting
Terminals/Fixed Contact Type	Screw/Solder
Keylock Switch Contact Current Rating	5 A, 15 A
Contact Finish	Silver

#### Mechanical Attachment

Lock Body	Zinc Alloy
Keylock Switch Mounting Type	Panel

#### Housing Features

Cylinder Material	Zinc Alloy
Remove Key	Position 2

#### Usage Conditions

Oil-Tight	No
Operating Temperature (Max)	85 °C

#### Other

Life Expectancy	20000 Cycles
Comment	All keylocks are supplied with 2 brass keys on a ring.
Soldering Type	Hand

#### Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JUNE 2022 (224) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per

homogenous material. Also BFR/CFR/PVC Free

Solder Process Capability

Not applicable for solder process capability

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

## Compatible Parts



## Documents

### CAD Files

[3D PDF](#)

[3D](#)

#### Customer View Model

[ENG\\_CVM\\_CVM\\_3-1437597-6\\_99.2d\\_dxf.zip](#)

English

#### Customer View Model

[ENG\\_CVM\\_CVM\\_3-1437597-6\\_99.3d\\_igs.zip](#)

English

#### Customer View Model

[ENG\\_CVM\\_CVM\\_3-1437597-6\\_99.3d\\_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

### Datasheets & Catalog Pages

[SWITCHES\\_CORE\\_PROGRAM\\_CATALOG](#)

English

