


GRACE INERTIA 2.5 TE Internal #: 3-1903390-4 Rectangular Connector Housings, Wire-to-Wire, 4 Position, .098 in [2.5 mm] Centerline, 1 Row, PBT GF, Plug, Socket, Wire & Cable, GRACE INERTIA 2.5

View on TE.com >

Connectors > Rectangular Connectors > Rectangular Connector Housings > STD Temp Sig GRACE INERTIA Plug

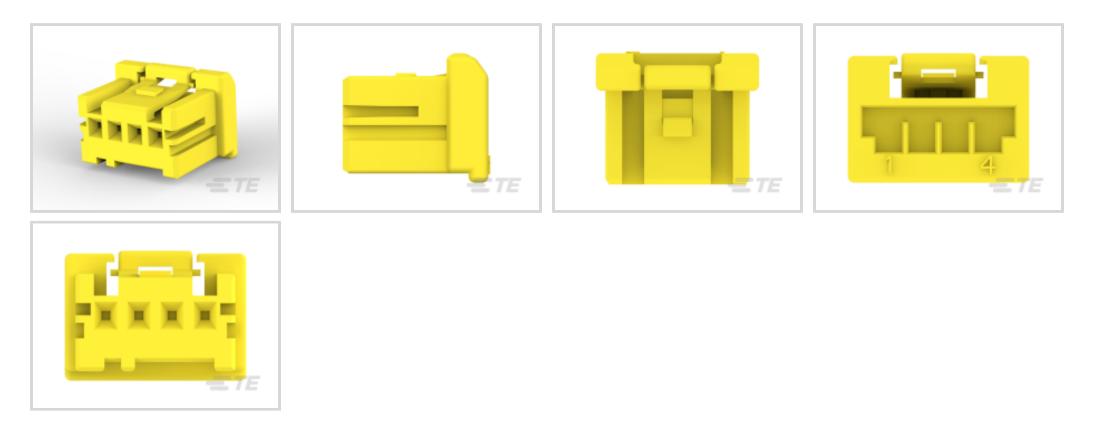

Connector System: Wire-to-Wire

Number of Positions: 4

Centerline (Pitch): 2.5 mm [.098 in]

Number of Rows: 1

Housing Material: PBT GF

All STD Temp Sig GRACE INERTIA Plug (63)



Features

Product Type Features

Connector System	Wire-to-Wire	
Connector & Housing Type	Plug	
Sealable	No	
Connector & Contact Terminates To	Wire & Cable	
Connector Type	Housing	
Product Type	Connector	
	Standard Part - Not Glow Wire	
Glow Wire Rating	Standard Part - Not Glow Wire	
Glow Wire Rating Configuration Features	Standard Part - Not Glow Wire	
	Standard Part - Not Glow Wire 4	
Configuration Features		
Configuration Features Number of Cavities	4	

3-1903390-4

Rectangular Connector Housings, Wire-to-Wire, 4 Position, .098 in [2.5 mm] Centerline, 1 Row, PBT GF, Plug, Socket, Wire & Cable, GRACE INERTIA 2.5



Electrical Characteristics

Operating Voltage	250 VDC	
Contact Features		
Contact Layout	Inline	
Multiple Contact Types	Without	
Shunts/Shorting Bars	Without	
Contact Type	Socket	
Mechanical Attachment		
Panel Mount	No	
Connector Mounting Type	Cable Mount (Free-Hanging)	
Housing Features		
Centerline (Pitch)	2.5 mm[.098 in]	
Housing Material	PBT GF	
Housing Color	Yellow	
Dimensions		
Height	11 mm[.433 in]	
Length	13.7 mm[.539 in]	
Width	9.6 mm[.378 in]	
Usage Conditions		
Operating Temperature Range	-30 – 105 °C[-22 – 221 °F]	
Operation/Application		
Assembly Integration Feature	Without	
Circuit Application	Signal	
For Use With	Receptacle Housing	
Identification Marking		
Circuit Identification Feature	Without	
Packaging Features		
Packaging Quantity	1000	
Packaging Method	Bag	

Product Compliance

For compliance documentation, visit the product page on TE.com>

3-1903390-4

Rectangular Connector Housings, Wire-to-Wire, 4 Position, .098 in [2.5 mm] Centerline, 1 Row, PBT GF, Plug, Socket, Wire & Cable, GRACE INERTIA 2.5



EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JUNE 2022 (224) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts





3-1903390-4

Rectangular Connector Housings, Wire-to-Wire, 4 Position, .098 in [2.5 mm] Centerline, 1 Row, PBT GF, Plug, Socket, Wire & Cable, GRACE INERTIA 2.5



Also in the Series | GRACE INERTIA 2.5

A Contraction of the second se		Contraction of the second	
Connector Contacts(2)	PCB Headers & Receptacles(138)	PCB Latches, Locks & Retainers(5)	Rectangular Connector Housings(49)
And a second			A A A A
Rectangular Connector Locking(2)	Rectangular Power Connectors(35)	Wire-to-Board Connector Assemblies & Housings(72)	Wire-to-Board Connector Contacts(5)

Documents

Product Drawings GIC 2.5 W PLUG HSG 4P YELLOW

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_3-1903390-4_F_c-3-1903390-4-f.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_3-1903390-4_F_c-3-1903390-4-f.3d_igs.zip

English

Customer View Model ENG_CVM_CVM_3-1903390-4_F_c-3-1903390-4-f.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications Product Specification

English