
3-966292-3 - ACTIVE

TE Internal #: 3-966292-3 Crimp Wire Pins, Tabs & Ferrules, Ferrule, 3 AWG Wire Size, 25 mm² Wire Size, 52600 CMA Wire Size, .44 in [11.2 mm] Barrel Inside Diameter, Closed

View on TE.com >



Terminals & Splices > Crimp Wire Pins, Tabs & Ferrules

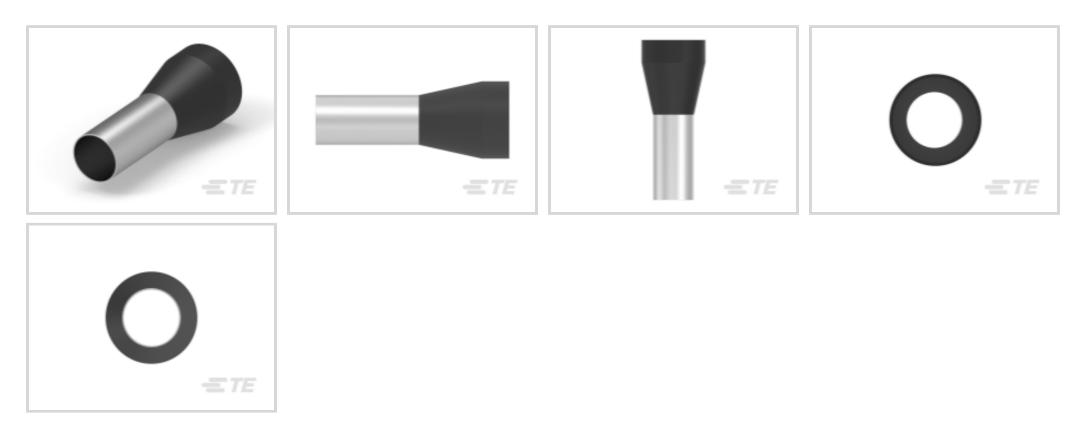

Crimp Wire Pin, Tab & Ferrule Terminal Type: Ferrule

Accepts Wire Insulation Diameter Range: 11.1 mm [.437 in]

Wire Size: 52600 CMA

Features

Product Type Features

Sealable

Compatible With Discrete Wire Type	Stranded
Configuration Features	
Compatible With Wire & Cable Type	Discrete Wire
Body Features	
Double Wire	No
Contact Features	
Terminal Length	16 mm[.624 in]
Crimp Wire Pin, Tab & Ferrule Terminal Type	Ferrule
Barrel Type	Closed
Terminal Plating Material	Tin
Terminal Orientation	Straight
Mechanical Attachment	
Wire Insulation Support	Without
Dimensions	

3-966292-3

Crimp Wire Pins, Tabs & Ferrules, Ferrule, 3 AWG Wire Size, 25 mm² Wire Size, 52600 CMA Wire Size, .44 in [11.2 mm] Barrel Inside Diameter, Closed



2-Wire Size	3 AWG
Strip Length	19 mm[.748 in]
Accepts Wire Insulation Diameter Range	11.1 mm[.437 in]
Wire Size	52600 CMA
Barrel Inside Diameter	11.2 mm[.44 in]
Terminal Material Thickness	.2 mm[.007 in]
Overall Product Length	30 mm[1.181 in]
Usage Conditions	
Insulation Option	Partially Insulated
Operating Temperature Range	105 °C[221 °F]
Operation/Application	
Heavy Duty	No
Packaging Features	
Packaging Quantity	50
Packaging Method	Carton
Other	
Barrel Color	Black

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JUL 2021 (219) Does not contain REACH SVHC
Halogen Content	Not Yet Reviewed for halogen content
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these

3-966292-3

Crimp Wire Pins, Tabs & Ferrules, Ferrule, 3 AWG Wire Size, 25 mm² Wire Size, 52600 CMA Wire Size, .44 in [11.2 mm] Barrel Inside Diameter, Closed



limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-onreach

Compatible Parts



Documents

Product Drawings TUBULAR END SLEEVE

English

CAD Files

Customer View Model

ENG_CVM_CVM_3-966292-3_O.3d_igs.zip

English

Customer View Model

ENG_CVM_3-966292-3_A1.3d_igs.zip

English

Customer View Model

ENG_CVM_3-966292-3_A1.2d_dxf.zip

English

3D PDF

English

Customer View Model

ENG_CVM_3-966292-3_A1.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use

Datasheets & Catalog Pages Wire Ferrules English WIRE END FERRULES English

C For support call+1 800 522 6752

3-966292-3

Crimp Wire Pins, Tabs & Ferrules, Ferrule, 3 AWG Wire Size, 25 mm² Wire Size, 52600 CMA Wire Size, .44 in [11.2 mm] Barrel Inside Diameter, Closed

