


### FASTON | FASTON 187

TE Internal #: 42799-2 Quick Disconnects, Receptacle, 20 – 16 AWG Wire Size, .51 – 1.31 mm<sup>2</sup> Wire Size, Mating Tab Width .187 in [4.75 mm], Straight, Brass, FASTON 187

#### View on TE.com >

Terminals & Splices > Quick Disconnects

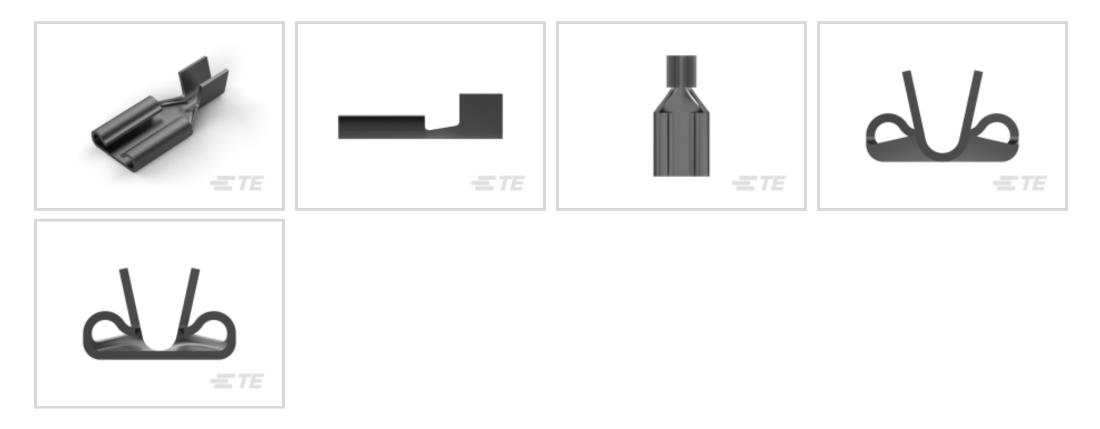

Quick Disconnect Terminal Type: Receptacle

Wire Size: .51 – 1.31 mm<sup>2</sup>

Mating Tab Width: 4.75 mm [.187 in ]

Mating Tab Thickness: .51 mm [.02 in ]

### Features

### Product Type Features



Terminates To	Wire & Cable
Wire Stop	No
Wire/Cable Type	Regular Wire
Insertion Force	Normal
Sealable	No
Configuration Features	
Connection Capacity	Single
Contact Features	
Quick Disconnect Terminal Type	Receptacle
Mating Tab Width	4.75 mm[.187 in]
Mating Tab Thickness	.51 mm[.02 in]
Terminal Orientation	Straight
Contact Base Material	Brass
Terminal Plating Material	Tin
Crimp Type	F-Crimp

**C** For support call+1 800 522 6752

### 42799-2

Quick Disconnects, Receptacle, 20 – 16 AWG Wire Size, .51 – 1.31 mm² Wire Size, Mating Tab Width .187 in [4.75 mm], Straight, Brass, FASTON 187



Barrel Type	Open
Mechanical Attachment	
Mating Retention Type	Dimple
Wire Insulation Support	Without
Dimensions	
Overall Length	12.07 mm[.475 in]
Receptacle Terminal Stock Thickness	.3 mm[.012 in]
Wire Size	.51 – 1.31 mm²
Usage Conditions	
Insulation Option	Uninsulated
Operating Temperature Range	-40 - 110 °C[-40 - 230 °F]
Industry Standards	
UL Rating	Listed
CSA Certified	Yes
Packaging Features	
Packaging Quantity	25000
Packaging Method	Strip/Reel



Strip/Reel

# **Product Compliance**

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant			
EU ELV Directive 2000/53/EC	Compliant			
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold			
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JUNE 2022 (224) Does not contain REACH SVHC			
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free			
Solder Process Capability	Not applicable for solder process capability			
Product Compliance Disclaimer				

### 42799-2

Quick Disconnects, Receptacle, 20 – 16 AWG Wire Size, .51 – 1.31 mm<sup>2</sup> Wire Size, Mating Tab Width .187 in [4.75 mm], Straight, Brass, FASTON 187



This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

# **Compatible Parts**



TE Part # 2-2150452-1 OCEAN\_2.0\_Applicator-E-090F



TE Part # 2-2150452-2 OCEAN\_2.0\_Applicator-E-090FA




TE Part # 2150452-1 OCEAN\_2.0\_Applicator-E-090F



TE Part # 2150452-2 OCEAN\_2.0\_Applicator-E-090FA








TE Part # 7-2150452-1	TE Part # 7-2150452-2	TE Part # 7-2150452-7	
OCEAN_2.0_Applicator-E-090F	OCEAN_2.0_Applicator-E-090FA	OCEAN_2.0_SPARE_PART_KIT-090F	


# Also in the Series | FASTON 187

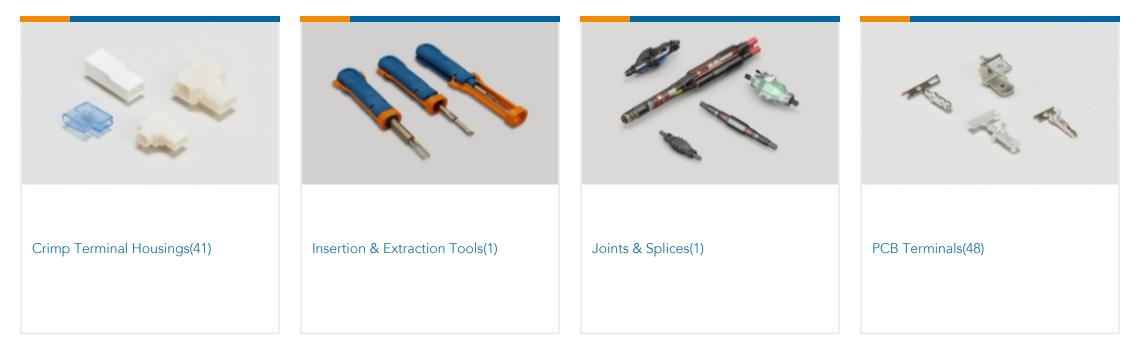

### 42799-2

Quick Disconnects, Receptacle, 20 – 16 AWG Wire Size, .51 – 1.31 mm<sup>2</sup> Wire Size, Mating Tab Width .187 in [4.75 mm], Straight, Brass, FASTON 187



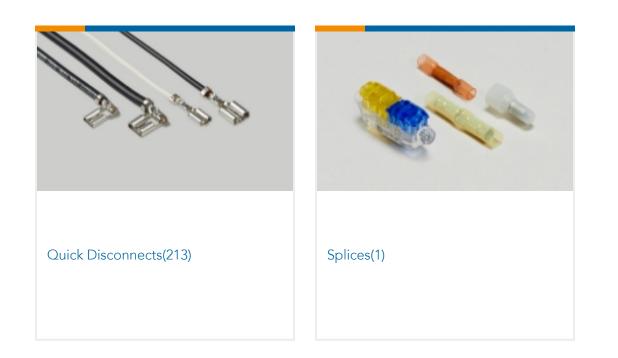

### Documents

### Product Drawings 187 FASTON REC 20-16 AWG TPBR

English

### **CAD** Files

Customer View Model

ENG\_CVM\_CVM\_42799-2\_AR.2d\_dxf.zip

English

### 3D PDF

3D

Customer View Model ENG\_CVM\_CVM\_42799-2\_AR.3d\_igs.zip

English

**Customer View Model** 

#### ENG\_CVM\_CVM\_42799-2\_AR.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages 82004 FASTON Terminals (Insulated and Uninsulated) Catalog - FASTON Receptacles Section

English

Product Specifications Application Specification

English

Product Environmental Compliance TE Material Declaration

English